

3 LIGHT LED PORTABLE FLOOD LIGHT

SKU# 231430

Rechargeable Lithium Battery: 18650 3.7V 6600mAh 24.42Wh

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of the product. Please keep instructions for future reference.

Warranty


- This product is covered by a 5-year warranty (excluding battery), valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the product.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Operation Requirements

- Select a suitable location for the flood light:
 - Ensure it is on a flat and stable surface.
 - Do not place flammable material near or over the flood light.
 - This floodlight is protected against water penetration to IP54 standards, which is splashing water from any direction and is not designed to be immersed in water.
- Lay out all the components on a smooth surface and make sure no components are missing. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the product has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Parts Description


1. Portable flood light
2. Handle
3. Foldable LED panels
4. Main LED panel
5. Flood light stand
6. USB charging cable

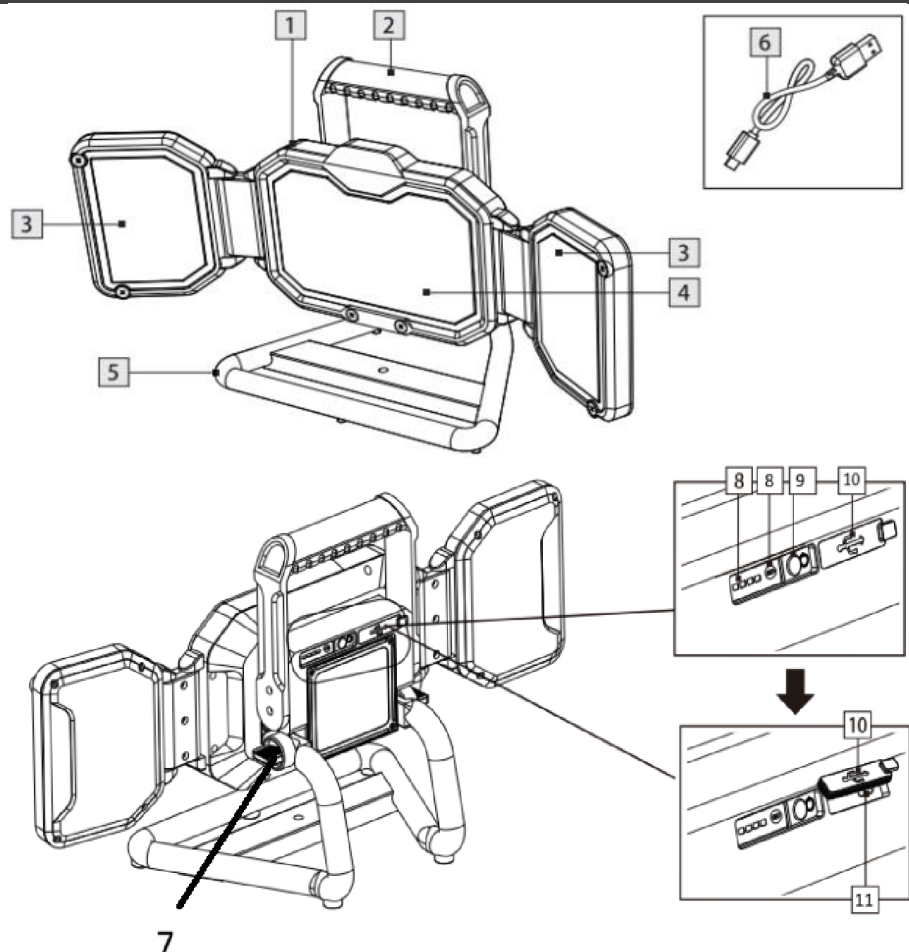

Operation Directions


1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material
2. Place the flood light (1) on flat and even surface.
3. Unfold the LED panels (3) on the left and right. Adjust them to your desired angle.

NOTE: The flood light will turn OFF automatically when the LED panels (3) are folded.

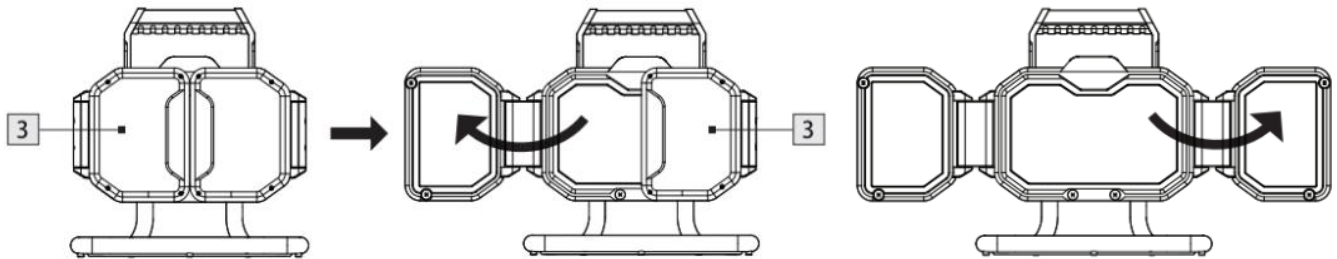

4. The angle of the flood light (1) can be adjusted by loosening the hinge screw (7) on the side.

NOTE: Do not adjust the flood light more than 60 degrees back as it will cause it to be unstable and fall over.

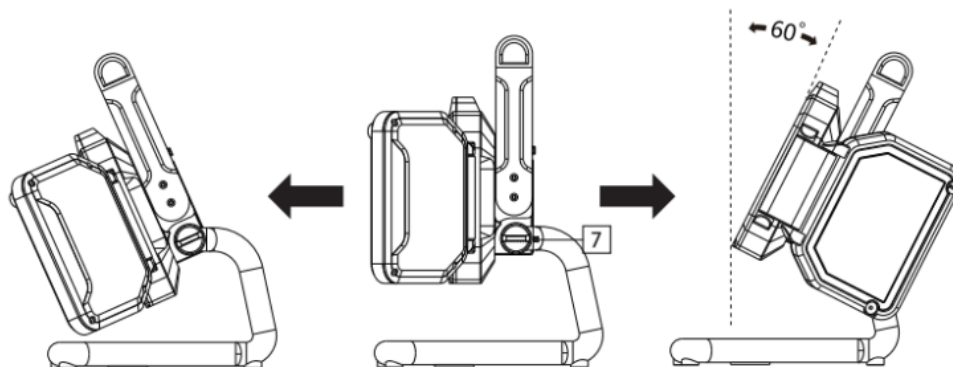

5. Use the ON/OFF button (9) to cycle through the brightness settings:
 - **Press once** – Flood light turns **ON** at **High Brightness** (2650 lumens)
 - **Press twice** – Brightness changes to **Medium** (1350 lumens).
 - **Press three times** - Brightness changes to **Low** (600 lumens).
 - **Press four times** – Flood light turns **OFF**.

USB-C CHARGING

This flood light has a built-in rechargeable lithium battery: 18650 3.7V 6600mAh 24.42Wh.

1. Use the USB-C charging cable (6) provided with a compatible adapter (not included) to charge the flood light.
2. Remove the USB-C port cover (10) and insert the charging cable (6) into the USB-C charging port (11).
3. The charge indicator (8) will show the charging status when:
 - Blue light is flashing: The flood light is charging.
 - Blue light is steady: The flood light is fully charged.

NOTE:

- **Fully charge the battery before first use of the flood light.**
- **Do not charge the flood light overnight. Overcharging may reduce battery lifespan or cause damage.**
- **The battery includes built-in overload protection. This feature helps prevent overcharging and ensures safe operation**
- **To maintain optimal performance, recharge the battery at regular intervals. Charge at least once every three months to prevent battery degradation.**
- **After charging, securely close the USB-C port cover (10). This is essential to maintain the flood light's IP54 water and dust resistance rating.**

Safety Tips

- Always ensure the power is OFF and the flood light has cooled down before performing any maintenance, cleaning or making any adjustment to the flood light.
- Young children should be supervised to ensure that they do not play with the flood light.
- Handle the flood light with care to avoid any damage or breakage.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the flood light in water or other liquids.
- Ensure that the flood light does not encounter corrosive chemicals/solvents or abrasive cleaners etc.
- The light source of this flood light is not replaceable; when the light source reaches its end of life, the whole flood light shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the flood light.
- This flood light includes a built-in Li-ion battery. The battery of this flood light is not replaceable; when the battery reaches its end of life, the whole flood light shall be replaced. Contact your local council to safely dispose of equipment with a built-in battery.

Specifications

SKU	231430
Battery	18650 3.7V 6600mAh 24.42Wh
Power	16W
LED specs	4000K CRI≥80 High - 2650 lumens Medium - 1350 lumens Low - 600 lumens
Operating time	High – 2 hours Medium - 4 hours Low - 10 hours
IP Rating	IP54
Weight	2.4 kg
Dimensions	H:255mm W:175mm L:470mm