

LED FLOOD LIGHT

SKU# 231432

Rated Voltage: 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of the portable luminaire. Please keep instructions for future reference.

Warranty

- This flood light is covered by a 5-year warranty valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the flood light.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- Select a suitable location for the portable luminaire:
 - Ensure it is on a flat and stable surface.
 - Do not place flammable material near or over the flood light.
- This flood light is protected against water penetration to IP65 standards, which is low pressure jets of water from any direction.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the product has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket outlet before or during assembly. Only do so after the flood light is fully assembled and is ready to use for the first time.

Operation Directions

FIGURE A – UNPACKING THE FLOOD LIGHT

1. Carefully remove all packaging material from the product.
2. Place the flood light on a flat and stable surface for setup.

FIGURE B – FLOOD LIGHT SETUP

3. Loosen the screw located at the base of the floodlight to adjust its tilt.


NOTE: Do not tilt the flood light more than 70 degrees, as this may cause it to become unstable and tip over.

4. Loosen the side knob to rotate the floodlight head. It can be adjusted up to 360 degrees for optimal lighting direction.

NOTE: After adjusting, ensure the flood light is stable and securely positioned to prevent it from tipping over.

FIGURE C – POWERING THE FLOOD LIGHT

5. Insert the plug into the mains power socket outlet and ensure it is fully and securely plugged in.
6. Turn the power on at the mains power socket outlet to turn on the flood light.
7. Use the mains power socket outlet switch to turn the flood light ON or OFF as needed.

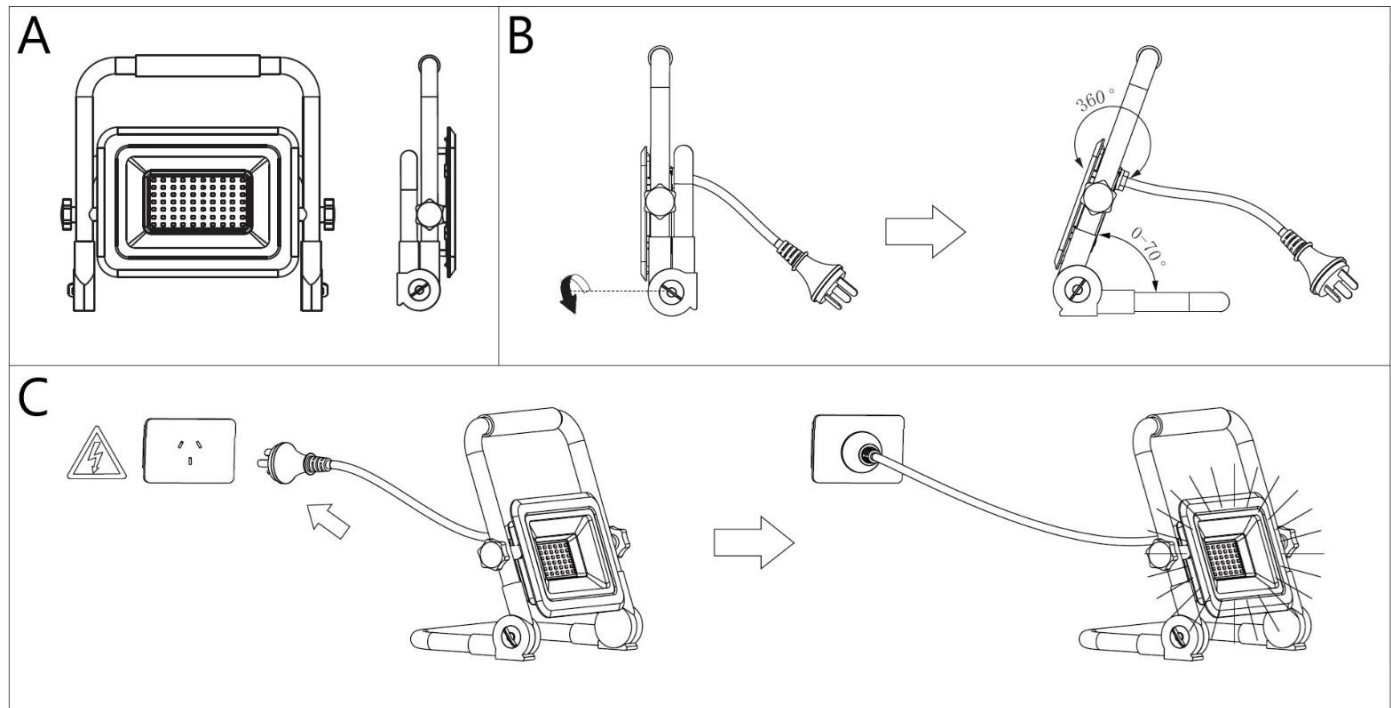

Safety Tips

- Always ensure the power is OFF and the flood light has cooled down before performing any maintenance, cleaning or making any adjustment to the flood light.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- Young children should be supervised to ensure that they do not play with the flood light.
- Handle the flood light with care to avoid any damage or breakage.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the flood light in water or other liquids.
- Ensure that the flood light does not encounter corrosive chemicals/solvents or abrasive cleaners etc.
- The light source of this flood light is not replaceable; when the light source reaches its end of life, the whole flood light shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the flood light.

Specifications

SKU	231432
Rated Voltage	220-240V~ 50Hz
Rated Power	24W
LED specs	2700 lumens, 4000K, CRI≥80
IP Rating	IP65
Weight	0.6 kg
Dimensions	H:245mm W:245mm L:260mm