

ODELIA 1 LIGHT PENDANT

SKU# 012000, 012001, 012002, 012003

Rated Voltage 220-240V~ 50Hz.

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
E.g., AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for use in indoor environments only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the luminaire is not installed in direct line of an air vent/system.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Determine the suspension length required for your installation location. If the length of the suspension cord (H), requires adjustment, loosen the cord anchorage (G) and adjust the length of the suspension cord (H). Tighten the cord anchorage (G), take care not to overtighten and damage the cord.
3. Remove the mounting bracket (B) from the canopy (F) by loosening the screws (E) on the sides.
4. Use the mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
5. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
6. Connect the mains supply wire to the terminal block (D).

Mains Supply Wire

- Earth – Yellow/Green
- Neutral – Blue or Black
- Live – Brown or Red

Luminaire Wire / Terminal block

- Yellow/Green or 
- Blue or N
- Brown or L


7. Ensure the wires are secure, and no bare wires are exposed.

NOTE: The luminaire is a Class I product and must be earthed during wiring and installation.

8. Install the canopy (F) onto the mounting bracket (B) and secure by tightening the screws (E) on the sides.
9. Install the shade (L) onto the pendant by placing it over to the lamp holder base (I), and then screwing in the shade stays (J) into the sides of the lamp holder base (I). Position the shade (L) onto the shade stays (J), ensuring the pendant is level and balanced.
10. Install a globe (M - not included) into the lamp holder (K). Do not exceed the maximum wattage rating of 45W.
11. After the installation, switch on the pendant to test and enjoy your new lighting product.

Re-lamping Directions

1. Ensure power to the pendant is turned off.
2. Lift the shade (L) from the shade stays (J) and over the lamp holder base (I).
3. Whilst holding the lamp holder base (I), unscrew the globe (M) from the lamp holder (K).
4. Install the new globe into the lamp holder (K), ensuring the new globe does not exceed the maximum wattage rating of 45W.
5. Reposition the shade (L) over the shade stays (J), ensuring the pendant is level and balanced.
6. Return power to the pendant and test the new globe.

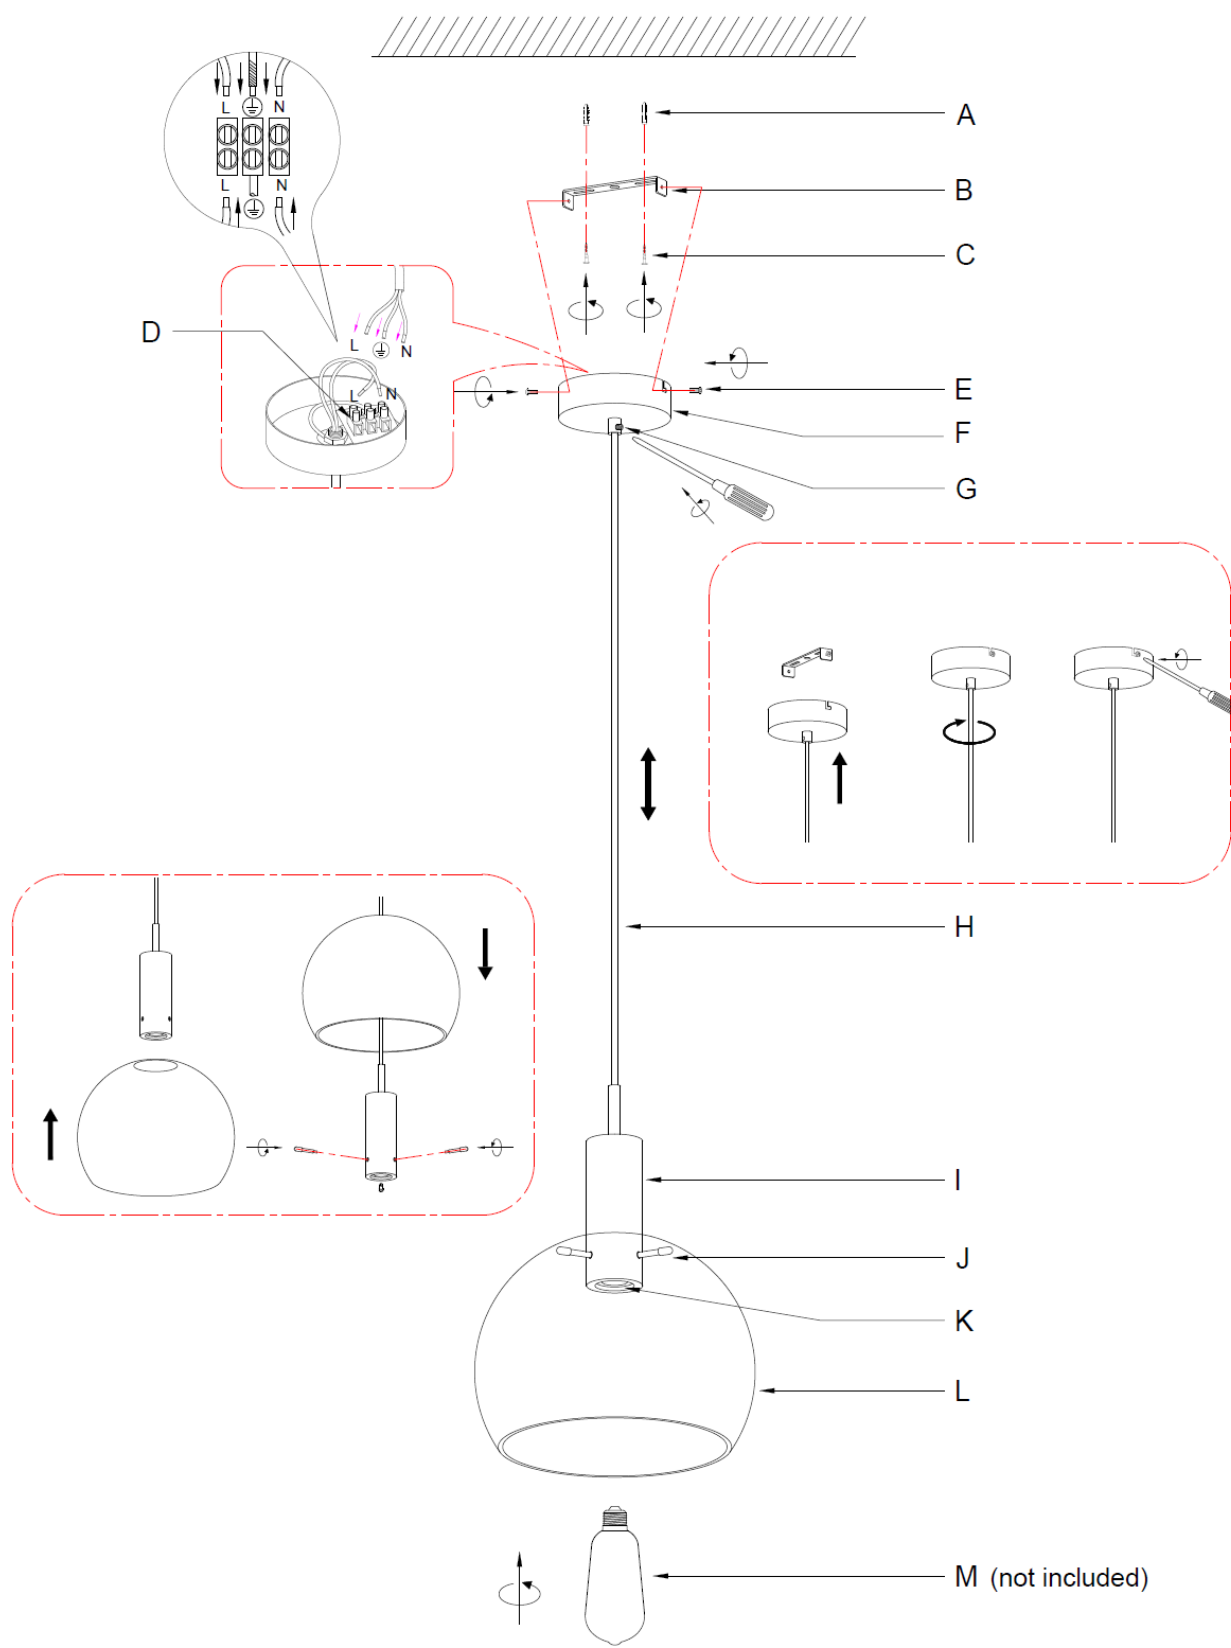

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globes or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	012000	012001	012002	012003
Pendant Base Colour	Natural Travertine / Aged Brass	Silver Travertine / Brushed Nickel	Oak Timber / Brushed Chrome	Walnut Timber / Bronze
Shade Colour	Clear Glass	Clear Glass	Clear Glass	Sepia Glass
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	45W Max.			
Lamp Holder	ES / E27			
Luminaire Weight	2.5kg		2.0kg	
Dimensions	H:395mm Dia:300mm Suspension: 2000mm MAX			