

YOLK 1 LIGHT PENDANT

SKU# 011895, 011896, 011897

Rated Voltage 220-240V~ 50Hz


To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This product is suitable for use in indoor environments only.
 - The mounting point must support 2 times the weight of the fitting.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

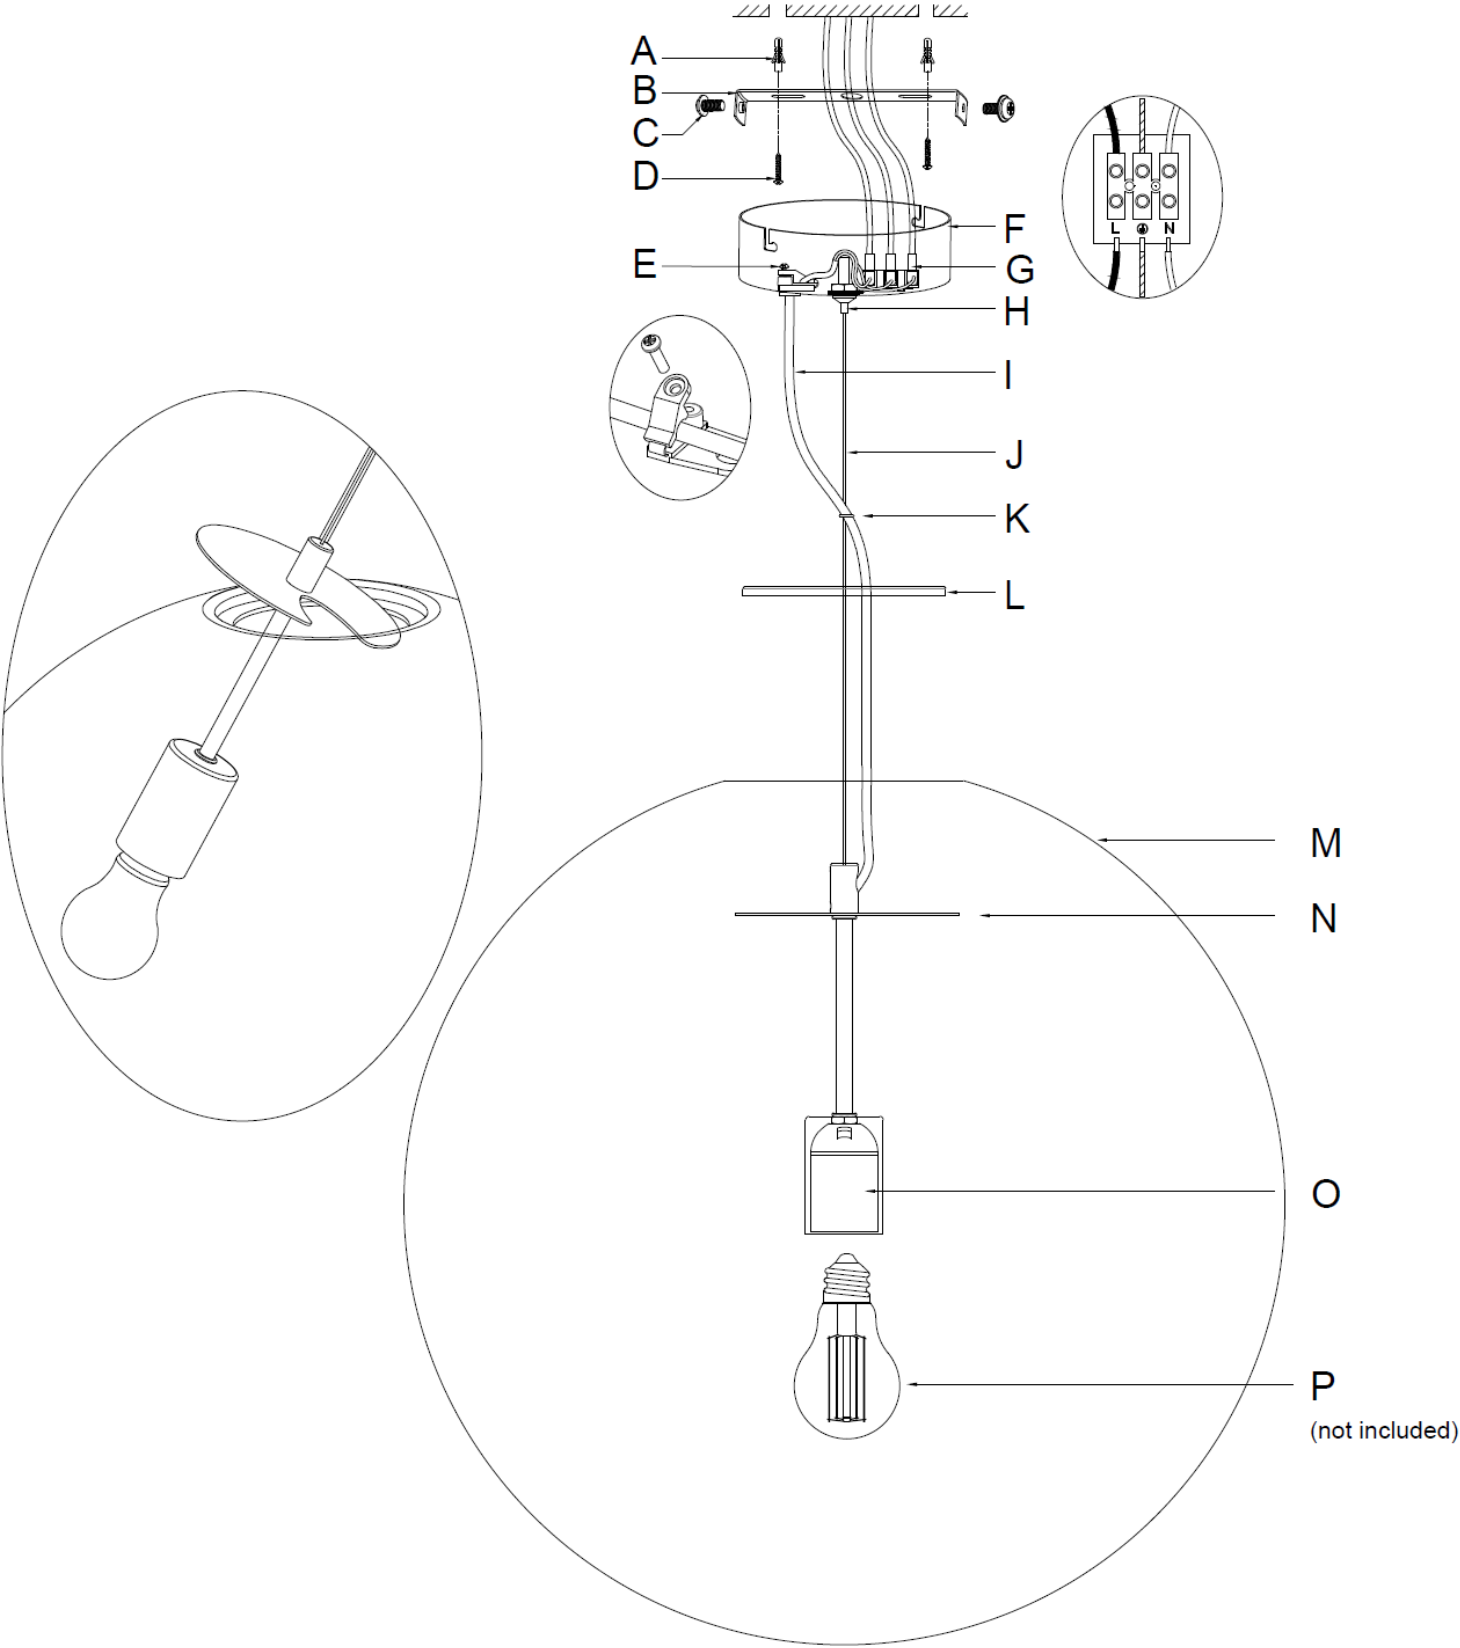

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the luminaire on its side on a smooth non scratch surface.
2. Determine the suspension length required for your luminaire at the chosen installation location:
 - If the suspension needs to be reduced – The excess suspension wire (J) can be pushed/pulled through the wire anchorage (H) and up into the canopy (F) until the desired length has been reached.
 - If the suspension wire (J) needs to be extended (maximum length 3000mm) – Press in and hold the middle cylinder of the wire anchorage (H) and pull the suspension cord back out of the canopy (F).
3. After adjusting the length of the suspension wire (J), adjust the length of the power supply cable (I) by loosening the cord grip (E) and feeding the cable (I) through the canopy (F) to the required length and fix in place by tightening the cord grip (E) over the supply cable.

NOTE: Ensure the suspension wire (J), and not the supply cable (I), supports the entire weight of the luminaire. Incorrect installation may compromise safety and lead to product failure.

4. Remove the mounting bracket (B) from the canopy (F) by loosening the screws (C) on the sides.
5. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
6. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
7. Connect the mains supply wire and luminaire wires together to the terminal block (G). Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire/ Terminal Block

Yellow/Green or 

Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

8. Install the canopy (F) onto the mounting bracket (B) and secure by tightening the screws (C) on the sides.
9. Lift the shade cover (L) to access the lamp holder assembly (N). Remove the lamp holder assembly (N) by tilting on an angle.
10. Install a globe (P – Not included) into the lamp holder (O) by rotating clockwise. Do not exceed the maximum wattage rating.
11. After the full assembly and installation, switch on the luminaire to test and enjoy your new lighting product.

Re-Lamping Instructions

1. Lift the shade cover (L) to access the lamp holder assembly (N).
2. Remove the lamp holder assembly (N) by tilting it on an angle to expose the globe.
3. Remove the existing globe (P) by rotating it anticlockwise.
4. Install the new globe (P) into the lamp holder (O) by rotating clockwise. Do not exceed the maximum wattage rating.
5. Reinstall the lamp holder assembly (N) by positioning it back into place and lowering the shade cover (L).
6. Restore power and switch ON the luminaire to test.

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals, etc.
- To clean/wipe with a damp clean cloth. Never soak the luminaire with water.

Specifications

SKU #	011895	011896	011897
Colour	Chalk with Opal shade		
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	1x 45W Max		
Lamp Holder	ES / E27		
Weight	2.8KGS	3.8KGS	6.8KGS
Shade Dimensions	Dia:500mm	Dia:600mm	Dia:800mm
Supply cable cord Dimensions	L: 3000mm		