

BALLARE 1 LIGHT GYPSUM PENDANT

SKU# 017155, 017156, 017157

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
E.g. AS/NZS 3000 Electrical Installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Determine the suspension length required for your installation. To adjust the length of the safety cable (L), pull excess cable through the cable anchorage (J) and into the canopy (H). If the safety cable needs to be extended (maximum length 2000mm), press in and hold the middle cylinder of the cable anchorage and pull excess cable back out from the canopy.
3. Once the length of the safety cable (L) has been adjusted to its final position, adjust the length of fabric cord (K) by pulling the excess through the opening (I) and into the canopy (H), securing with cord anchorage (F). The safety cable and fabric cord can be kept neatly together by adjusting the cable tidy rings (M) around the two suspensions.

NOTE: The full load/weight of the pendant must always be on the safety cable (L), and the fabric cord (K) should sit loosely beside it. Placing the load/weight of the pendant on the fabric cord may damage the power cables inside it.

4. Remove the mounting bracket (C) from the canopy (H) by loosening the screws (B) on the sides.

NOTE: the safety cable (L) is already looped at the mounting bracket (C) and tightened by the screws on anchorage (E). This can be removed to complete the following steps, however the safety cable (L) must be reattached to the mounting bracket (C) prior to installing the canopy (H).

5. Use the mounting bracket (C) as a template to mark the screw positions on the ceiling.
6. Install the mounting bracket (C) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.

- Connect the mains supply wire to the terminal block (G).

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green 

Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.


Ensure the wires are secure and no bare wires are exposed.

- Install the canopy (H) back onto the mounting bracket (C) and secure by tightening the screws (B) on the sides.
- Position shade (O) onto the light fixture (P). The shade position can be adjusted slightly to ensure it is properly balanced.
- Install a globe (Q – not included) into the lamp holder of light fixture (P). Do not exceed the maximum wattage rating.

NOTE: SKU# 017155 & 017157 are suitable for use with Fancy Round shaped globes only.

SKU# 017156 is suitable for use with Fancy Round or Candle shaped globes only.

- Install the glass shade (R) onto the light fixture (P).
- After the installation, switch on the luminaire to test all the lighting functions and enjoy your new luminaire.

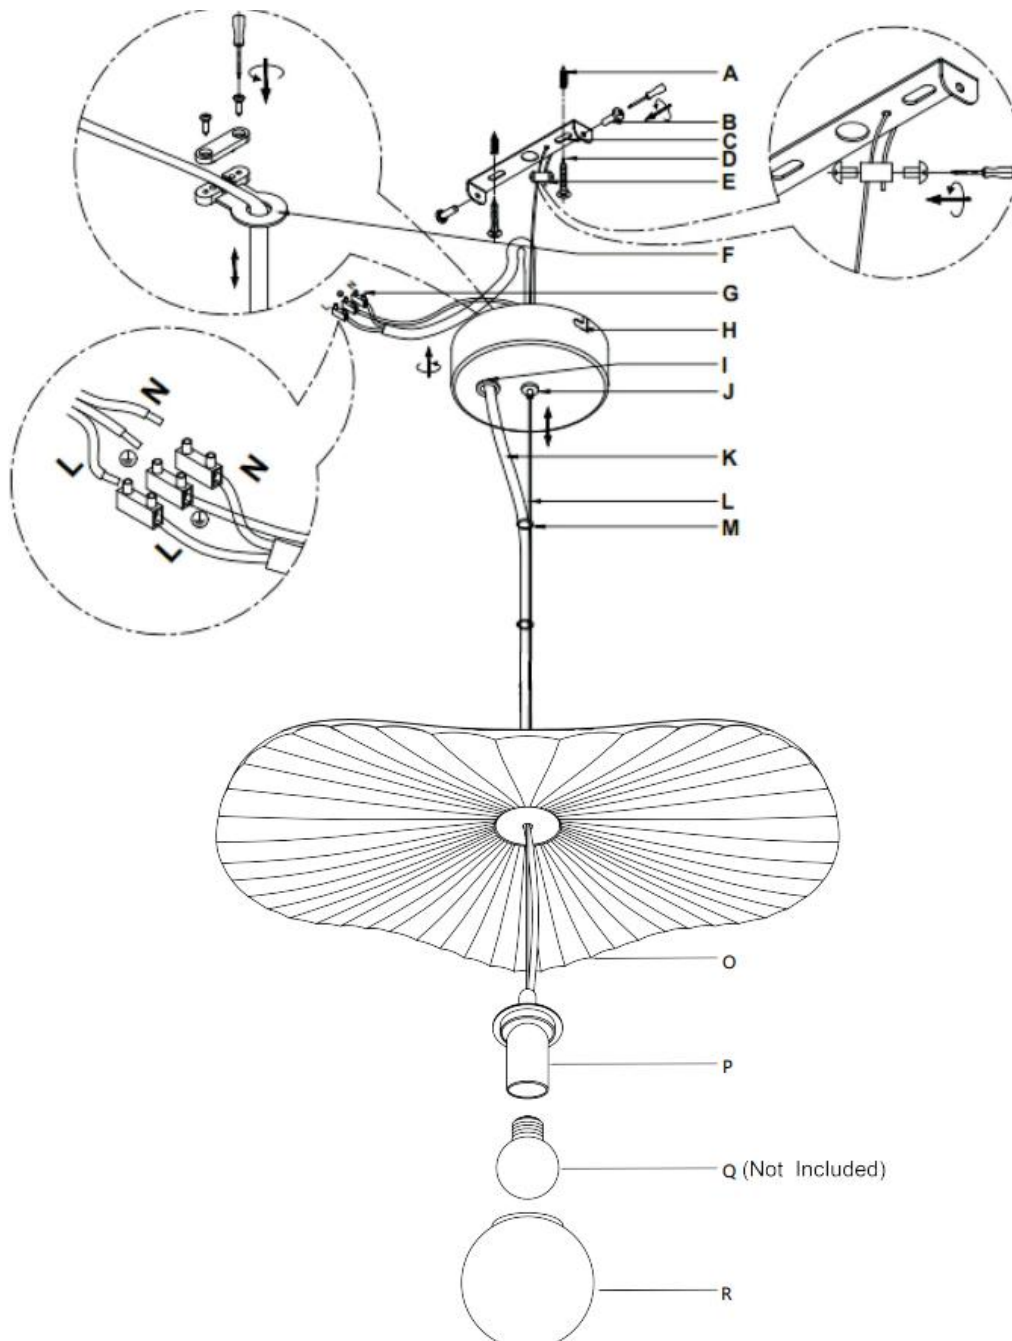

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamp or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	017155	017156	017157
Colour	WHITE		
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	Max. 45W		
Lamp Holder	ES / E27		
Globe Shape	G45 / Fancy Round Globes ONLY	G45 / Fancy Round or C35 / Candle Globes ONLY	G45 / Fancy Round Globes ONLY
Weight	5.7kg	11.4kg	2.9kg
Canopy Dimensions	H:35mm Dia:120mm		
Luminaire Dimensions	H:160mm Dia:600mm	H:160mm Dia:810mm	H:130mm Dia:450mm
Suspension Length	Susp: 2000mm MAX		