

WIRTH PENDANT RANGE

SKU# 018120 / 018121 (5 Light)

SKU# 018122 / 018123 (7 Light)

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12- month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This product is suitable for use in indoor environments only.
 - The mounting point must support 2 times the weight of the fitting.
 - If installing the luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the luminaire on its side on a smooth non scratch surface.
- 2. Remove the mounting bracket (B) from the canopy (E) by loosening the canopy screws (D) on the side of the canopy.
- 3. Adjust the suspension cord length required for your installation. If the length of the suspension cord, requires adjustment, loosen the cord anchorage screw (F) and adjust the length suspension cord by pulling to extend or pushing to reduce the length. Tighten the cord anchorage (F) to fix the suspension cord length, take care not to overtighten and damage the cord.
- 4. Use the mounting bracket (B) as a template to mark the mounting screw hole positions on the ceiling.
- 5. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
- 6. Connect the mains supply wire to the terminal block (F).

Mains Supply Wire	Luminaire Wire / Terminal block
Earth – Yellow/Green	Yellow/Green or 
Neutral – Blue or Black	Blue or N
Live – Brown or Red	Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

Ensure the wires are secure, and no bare wires are exposed.

- 7. Install the canopy (E) onto the mounting bracket (B) and secure by tightening the canopy screws (D) on side of canopy.
- 8. Install LED globes (not included) into the lamp holders. Switch ON to check the electrical installation. Do not exceed the maximum wattage rating.
- 9. Attached the Shade (H) and the Decorative washer (I), through the Shade bolt (G), and secure with either the Short (J) or Long (K) Decorative nut.


Note: Keep the unused Decorative nut for change of aesthetic appearance.

- 10. After the installation, switch on the luminaire to test and enjoy your new lighting product.

For Re-lamping:

- 11. Switch off the Luminaire and allow the globe/s to cool.
- 12. Remove the Shade to access the globes by following Step 9, in reverse.
- 13. Remove the old globe/s and repeat Step 8 and Step 9.

- A – Anchors
- B – Mounting bracket
- C – Mounting screws
- D – Canopy Screw
- E – Canopy
- F – Cord anchorage (Gromit screw)
- G – Shade Bolt (For Shade)
- H – Shade
- I – Decorative washer (For Shade)
- J – Short Decorative nut (For Shade)
- K – Long Decorative nut (For Shade)

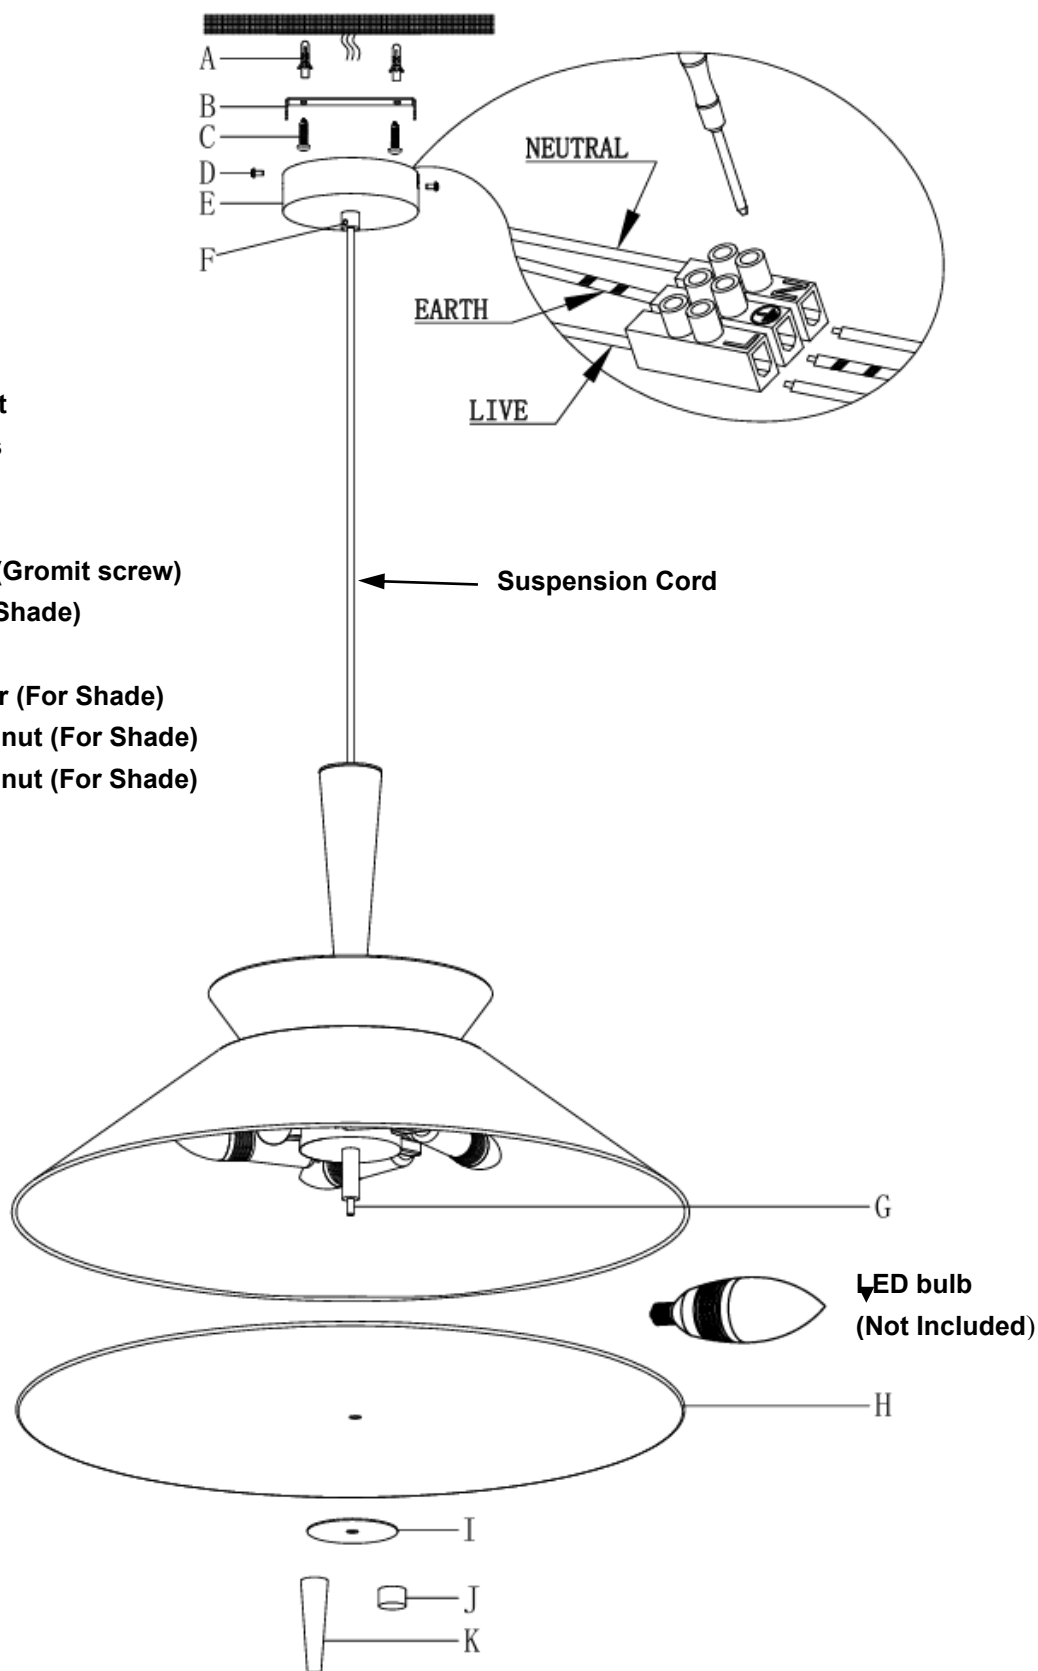

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards. Ensure that the luminaire does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the luminaire with water.

Specifications

SKU #	018120	018121	018122	018123
Colour	Oak with White Linen and Aged Brass finish	Walnut with Natural Linen and Bronze finish	Oak with White Linen and Aged Brass finish	Walnut with Natural Linen and Bronze finish
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	5 Light Total: 25W Max. (5 x 5W LED globes)		7 Light Total: 35W Max. (7 x 5W LED globes)	
Lamp holder	SES / E14			
Weight	2.4 Kg		3.2 Kg	
Canopy Dimensions	H:35mm Dia:120mm			
Luminaire Dimensions	H:280mm Dia:600mm		H:290mm Dia:800mm	
Suspension Length	3000mm			