

FJORD 1 LIGHT SMALL DOME PENDANT

SKU# 018167, 018168

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
E.g. AS/NZS 3000 Electrical Installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

NOTE: Due to the weight/wiring of the luminaire, two people may be required to lift it up during the installation process.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket (C) from the canopy (H) by loosening the screws (B) on the sides.
NOTE: the safety cable (L) is already looped at the mounting bracket (C) and tightened by the screws on anchorage (E).
3. Use the mounting bracket (C) as a template to mark the screw positions on the ceiling.
4. Determine the suspension length required for your installation location. If the length of the suspension needs adjusting, gently pull the excess length of the safety cable (L) through the cord anchorage (J) and into the canopy (H). If the safety cable (L) needs to be extended, press in and hold the middle cylinder of the cord anchorage (J) and then gently pull the safety cable (L) back through the cord anchorage (J).
5. When adjusting the suspension length, carefully pull the fabric cord (K) through the opening (I) in the canopy at the same time as the safety cable (L) to avoid twisting/tangling of the two cables, and adjust the silicone support bands (M) around the two cords to ensure they are aligned neatly.

6. Once the suspension length has been set, secure the excess suspensions by adjusting the Figure-8 Cord Anchor (F) over the fabric cord (K) inside the canopy, and adjusting the safety cable anchorage (E) on the mounting bracket (C).
7. Install the mounting bracket (C) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment
8. Connect the mains supply wire to the terminal block (G).

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green 


Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

Ensure the wires are secure and no bare wires are exposed.

9. Install the canopy (H) back onto the mounting bracket (C) and secure by tightening the screws (B) on the sides.
10. Position shade cover (O) and shade (P) onto the light fixture (Q). The shade position can be adjusted slightly to ensure it is properly balanced.
11. Install a lamp (R – not included) into the lamp holder of light fixture (Q). Do not exceed the maximum wattage rating.
12. After the installation, switch on the luminaire to test all the lighting functions and enjoy your new luminaire.

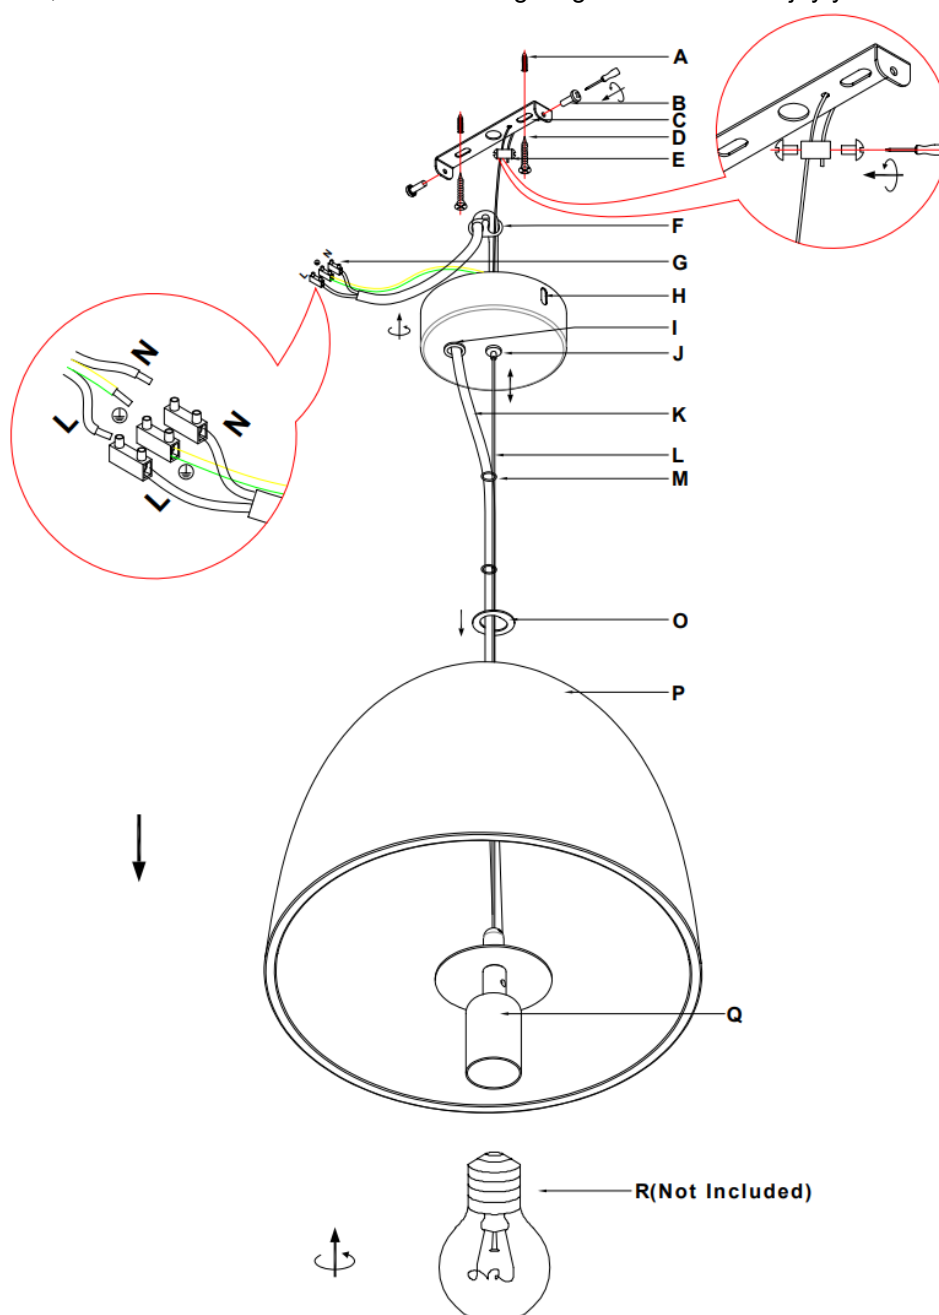

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamp or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	018167	018168
Colour	Black	Stone
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	Max. 45W	
Lamp Holder	ES/E27	
Weight	6.2kg	
Canopy Dimensions	H:35mm Dia:120mm	
Luminaire Dimensions	H:260mm Dia:300mm Susp:2000mm MAX	