

COACH 3 LIGHT BAR PENDANT

SKU# 031093, 031094, 031095.

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for use in indoor environments only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing the luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing, or have been damaged during transport, before assembling. Do not operate/install any luminaire which appears damaged in any way. If parts are missing or damaged, return the complete luminaire to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

NOTE: Due to the weight and the size of the luminaire, two people will be required to lift it up during the installation process.

NOTE: Assembly and installation of this luminaire must be done by a licensed electrician.

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface
2. Determine the required length of the suspension rod for your installation.
3. Install the required lengths of suspension rod (H, I, J, K) onto the luminaire body (L) followed by the angle joint (G) and canopy (F) at the top of the suspension rods.

NOTE: Avoid cross-threading the rods or canopy and do not twist the cord during assembly.
Pull and hold the cord from the top during assembly to prevent it from twisting.
Check the cord after every three turns when installing the rods and canopy. If the cord is twisted, untwist by turning the cord anti-clockwise.

4. Remove the mounting bracket (B) from the canopy (F) by loosening the screws (E) on the sides.
5. Use the mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
6. Depending on the mounting surface, determine if anchors (A) or mounting accessories are required for installation. If they are required, ensure they are suitable for the mounting surface and the surrounding environment
7. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C). Ensure the screws (C) used are suitable for the mounting surface and the surrounding environment.
8. Connect the luminaire wires and the mains supply wire to the terminal block (D).

Mains Supply Wire

Earth – Yellow/Green
 Neutral – Blue or Black
 Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green or 
 Blue or N
 Brown or L


9. Ensure the wires are secure and no bare wires are exposed.

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

10. Install the canopy (F) onto the mounting bracket (B) and secure by tightening the screws (E) on the sides.
11. Place the decorative sleeves (N) on top of the glass shades (O).
12. Slide the decorative sleeve (N) and glass shade (O) up and over the lamp holder (M) and secure everything together by installing the lamp holder cover (P) onto the lamp holder (M).
13. Install lamps (Q - not included) into the lamp holders (M). Do not exceed the maximum wattage rating.
14. After the installation is fully completed, switch on the luminaire to test and enjoy your new lighting product.

RELAMPING

1. Ensure the power is turned OFF to the luminaire and the lamp is fully cooled down before relamping.
2. Hold the luminaire body and suspension rod to prevent it from rotating or twisting.
3. Remove the old lamp by twisting it anti-clockwise and install a new lamp by twisting it clockwise until it is secure.

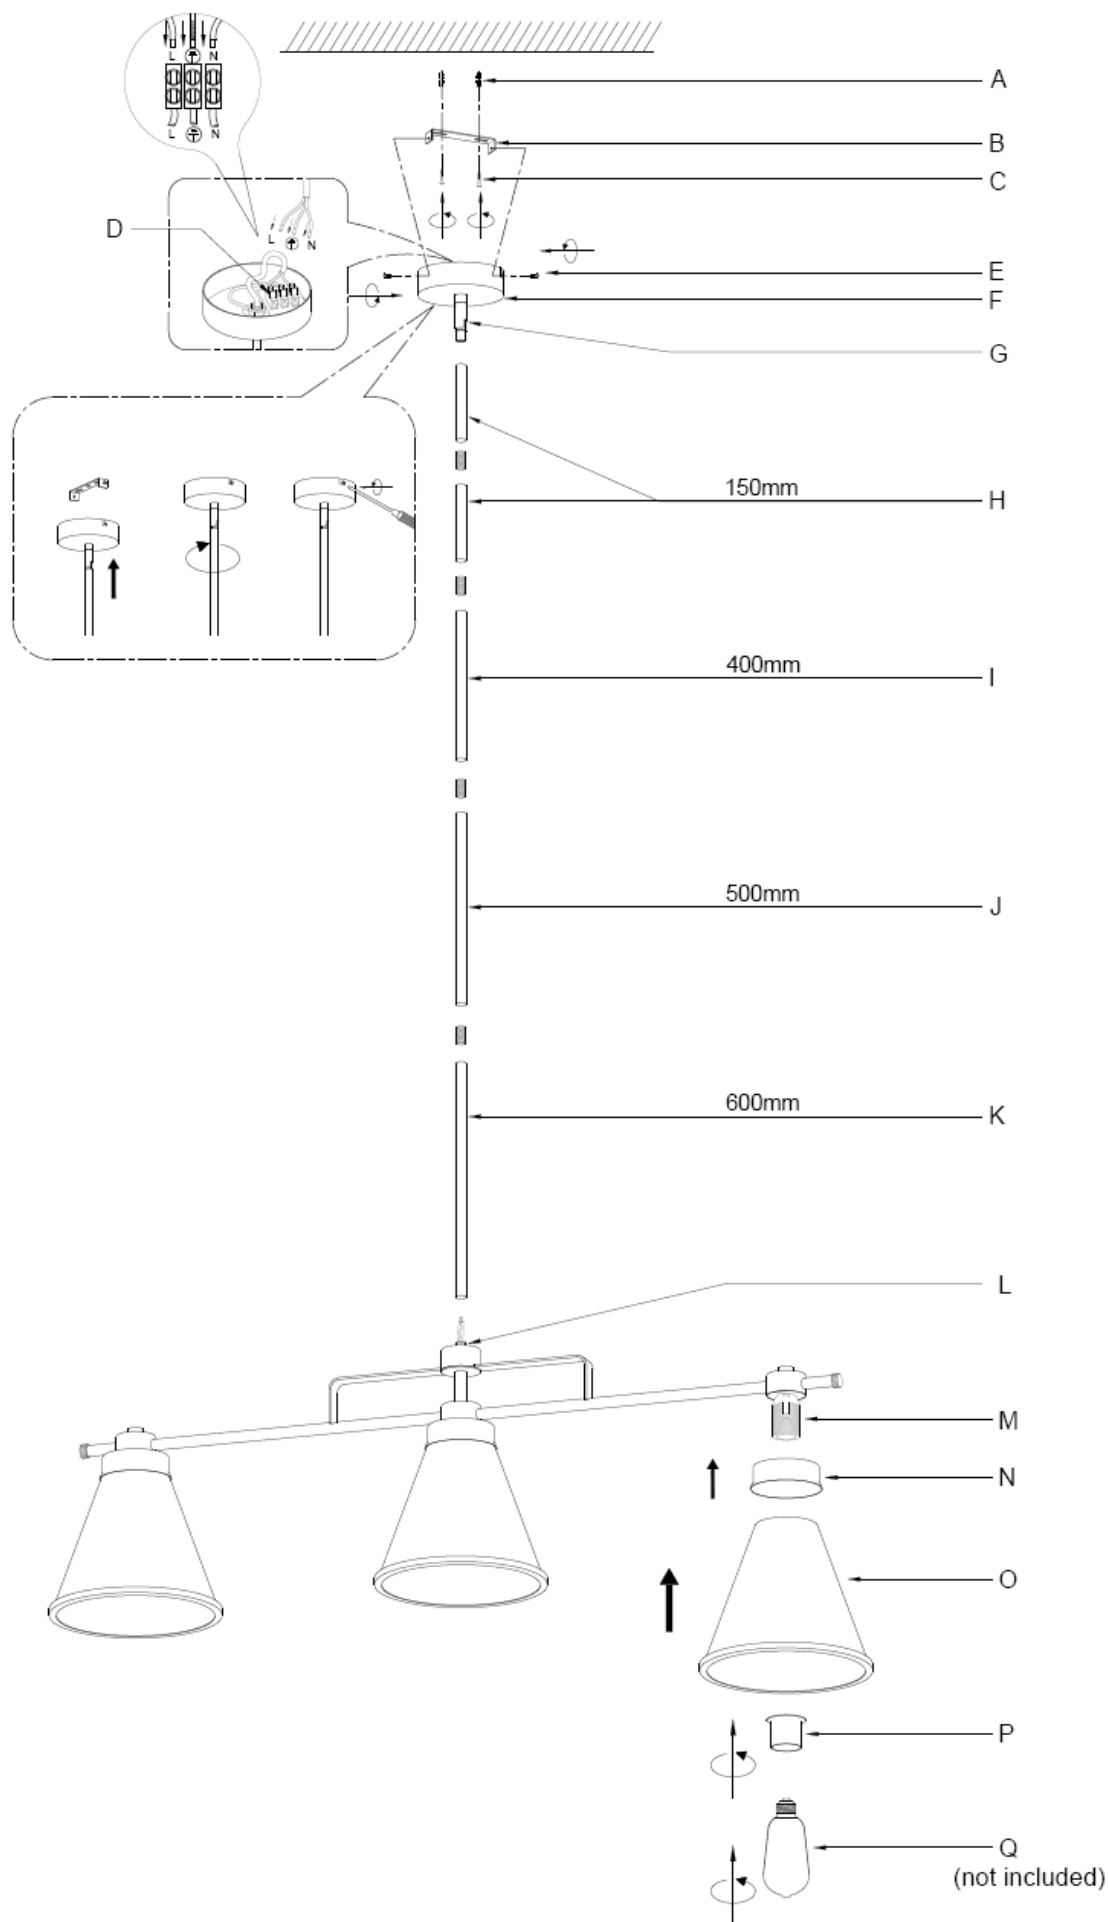

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamp or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	031093	031094	031095
Colour	Chrome	Aged Brass Finish	Bronze Finish
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	135W Max. (3x Max. 45W)		
Lamp Holder	ES / E27		
Weight	5.3kg		
Canopy Dimensions	H:35mm Dia:120mm		
Luminaire Dimensions	H:330mm L:1200mm W:240mm Susp:1800mm MAX		