

MONSOON 9 LIGHT PENDANT / CLOSE TO CEILING FITTING

SKU# 050668, 056071

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
E.g. AS/NZS 3000 Electrical Installations
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Select the type of installation you require before assembly and installation:
 - This luminaire can be installed as a Pendant or Close-to-Ceiling fitting.
 - Refer to the corresponding instructions and diagram for the different installation methods.

NOTE: Assembly and installation of this luminaire must be done by a licensed electrician.

NOTE: Due to the weight and the size of the luminaire, two people will be required to lift it up during the installation process.

PENDANT INSTALLATION INSTRUCTIONS (Refer to the diagram on Page 3)

- 1. Remove the mounting bracket (B) from the canopy (J) by loosening the nuts (K).
- 2. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
- 3. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (D)with washer(C) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
- 4. Determine the suspension length required for your installation location. Install the required lengths of suspension rod (L, M, N, O) onto the body (P) of the luminaire. Pull the luminaire cord out as you install the suspension rods (L, M, N, O) to remove any slack. Take care, not to cross-thread or twist and damage the luminaire cord.
- 5. Insert the luminaire cord through the hole of the canopy (J). Insert the rod (L) into the canopy(J) and secure by the installing the earth point (H).

NOTE: Ensure that the star washer, earth ring, lock washer and nut are installed in the correct sequence.

- 6. Insert the luminaire cord (F) through the pull clasp (G).
- 7. Tighten the safety lanyard (E) onto the mounting bracket(B), and ensure it is attached securely.
- 8. Open the cover of the terminal box (I), connect the luminaire wires and the mains supply wires to the terminal block. Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire	Luminaire Wire / Terminal Block
Earth – Yellow/Green	Yellow/Green or 
Neutral – Blue or Black	Blue or N
Live – Brown or Red	Brown or L


NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

- 9. Install the canopy (H) onto the mounting bracket (B) and secure by tightening the nuts (K).
- 10. Install globes (R - not included) into the lamp holders. Do not exceed the maximum wattage rating.
- 11. Install the panels (S - 35pcs, T - 35pcs, U -35pcs, V-35pcs, W-35pcs) onto the luminaire.

Take care not to crack or damage the panels during installing.

- 12. After the installation, switch on the luminaire to test and enjoy your new lighting product.

PENDANT INSTALLATION DIAGRAM (Refer to the installation steps on Page 2)

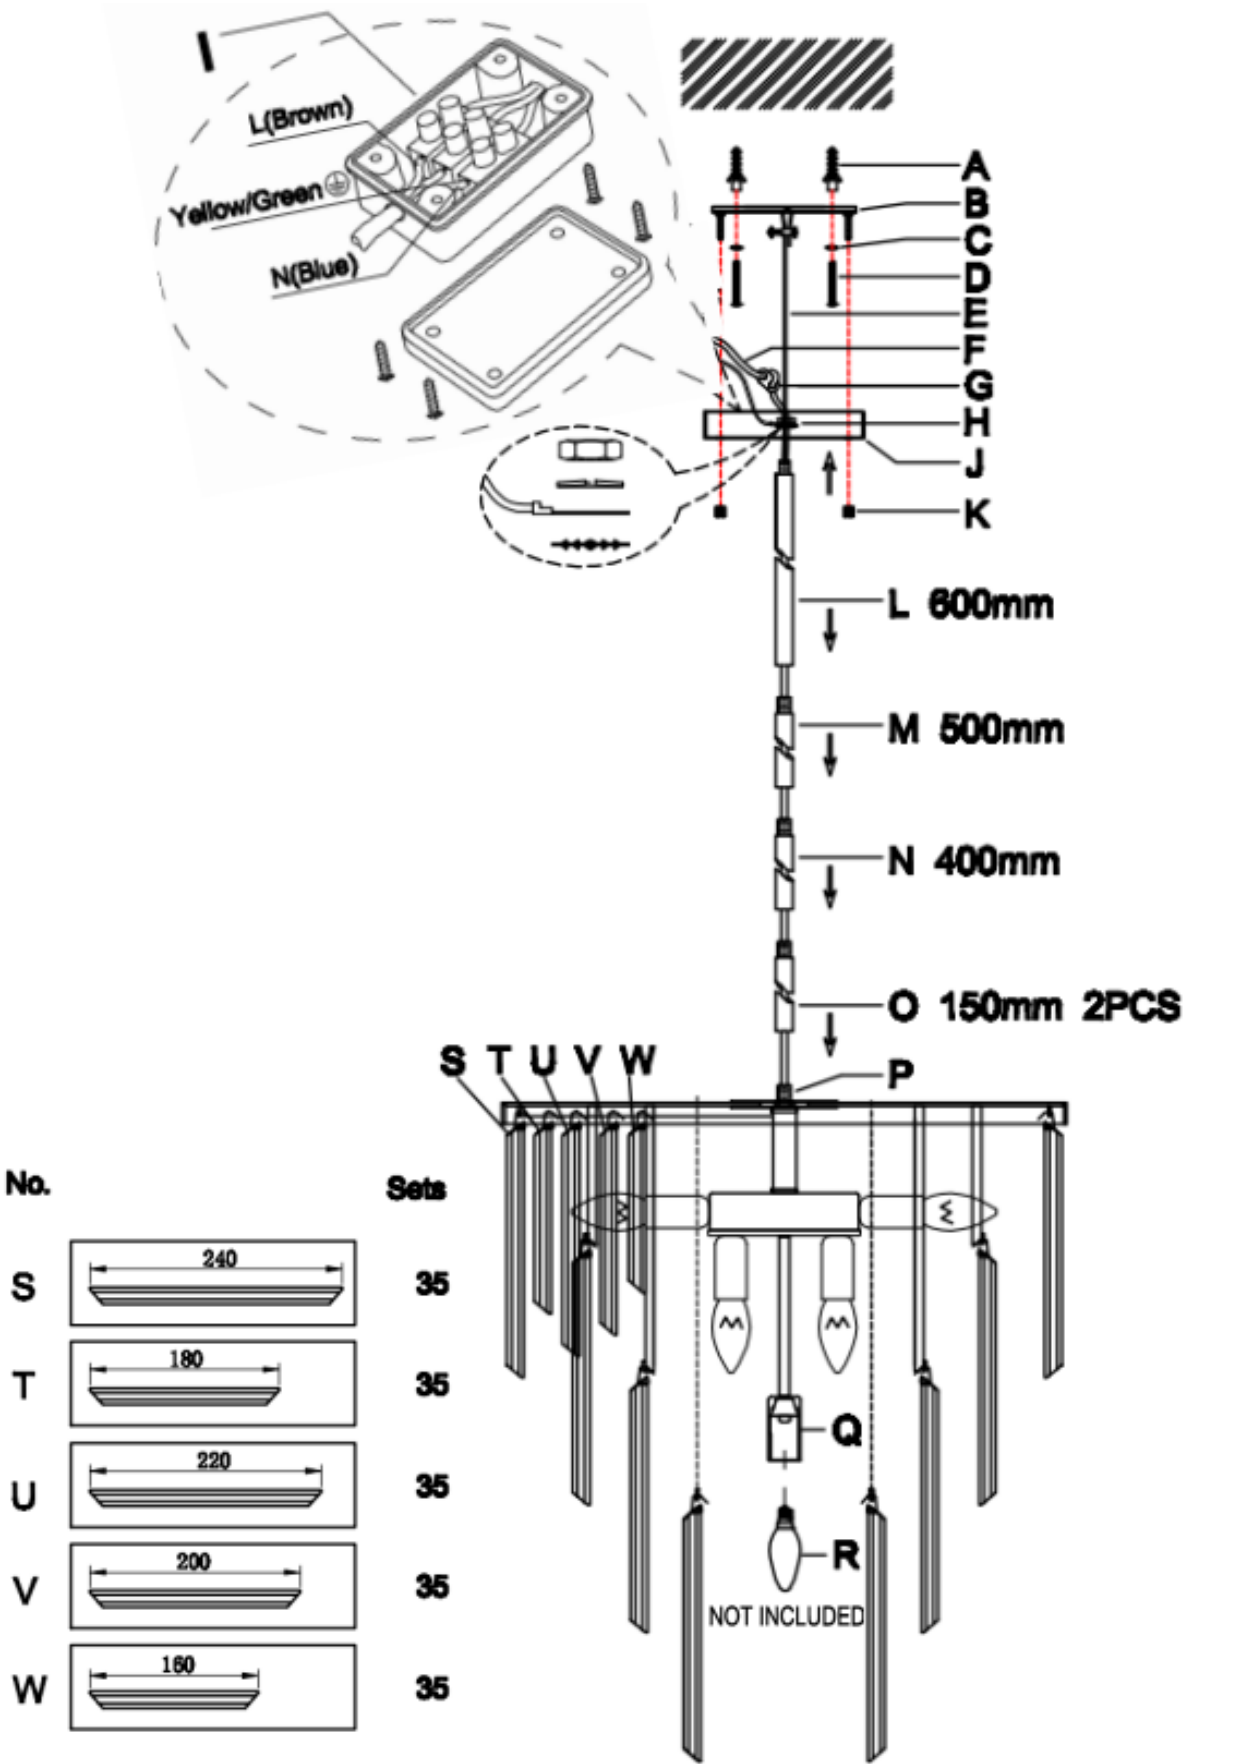

CLOSE TO CEILING INSTALLATION INSTRUCTIONS (Refer to the diagram on page 5)

- 1. Remove the mounting bracket (B) from the canopy (J) by loosening the nuts (K).
- 2. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
- 3. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (D)with washer(C) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
- 4. Insert the luminaire cord through the hole of the canopy (J). Insert the luminaire body (P) into the canopy(J) and secure by the installing the earth point (H).

NOTE: Ensure that the star washer, earth ring, lock washer and nut are installed in the correct sequence.


- 5. Insert the luminaire cord (F) through the pull clasp (G).
- 6. Tighten the safety lanyard (E) onto the mounting bracket(B), and ensure it is attached securely.
- 7. Open the cover of the terminal box (I), connect the luminaire wires and the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire	Luminaire Wire / Terminal Block
Earth – Yellow/Green	Yellow/Green or 
Neutral – Blue or Black	Blue or N
Live – Brown or Red	Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

- 8. Install the canopy (J) onto the mounting bracket (B) and secure by tightening the nuts (K).
- 9. Install globes (R - not included) into the lamp holders. Do not exceed the maximum wattage rating.
- 10. Install the panels (S - 35pcs, T - 35pcs, U -35pcs, V-35pcs, W-35pcs) onto the luminaire.
Take care not to crack or damage the panels during installing.
- 11. After the installation, switch on the luminaire to test and enjoy your new lighting product.

CLOSE TO CEILING INSTALLATION DIAGRAM (Refer to the installation steps on Page 4)

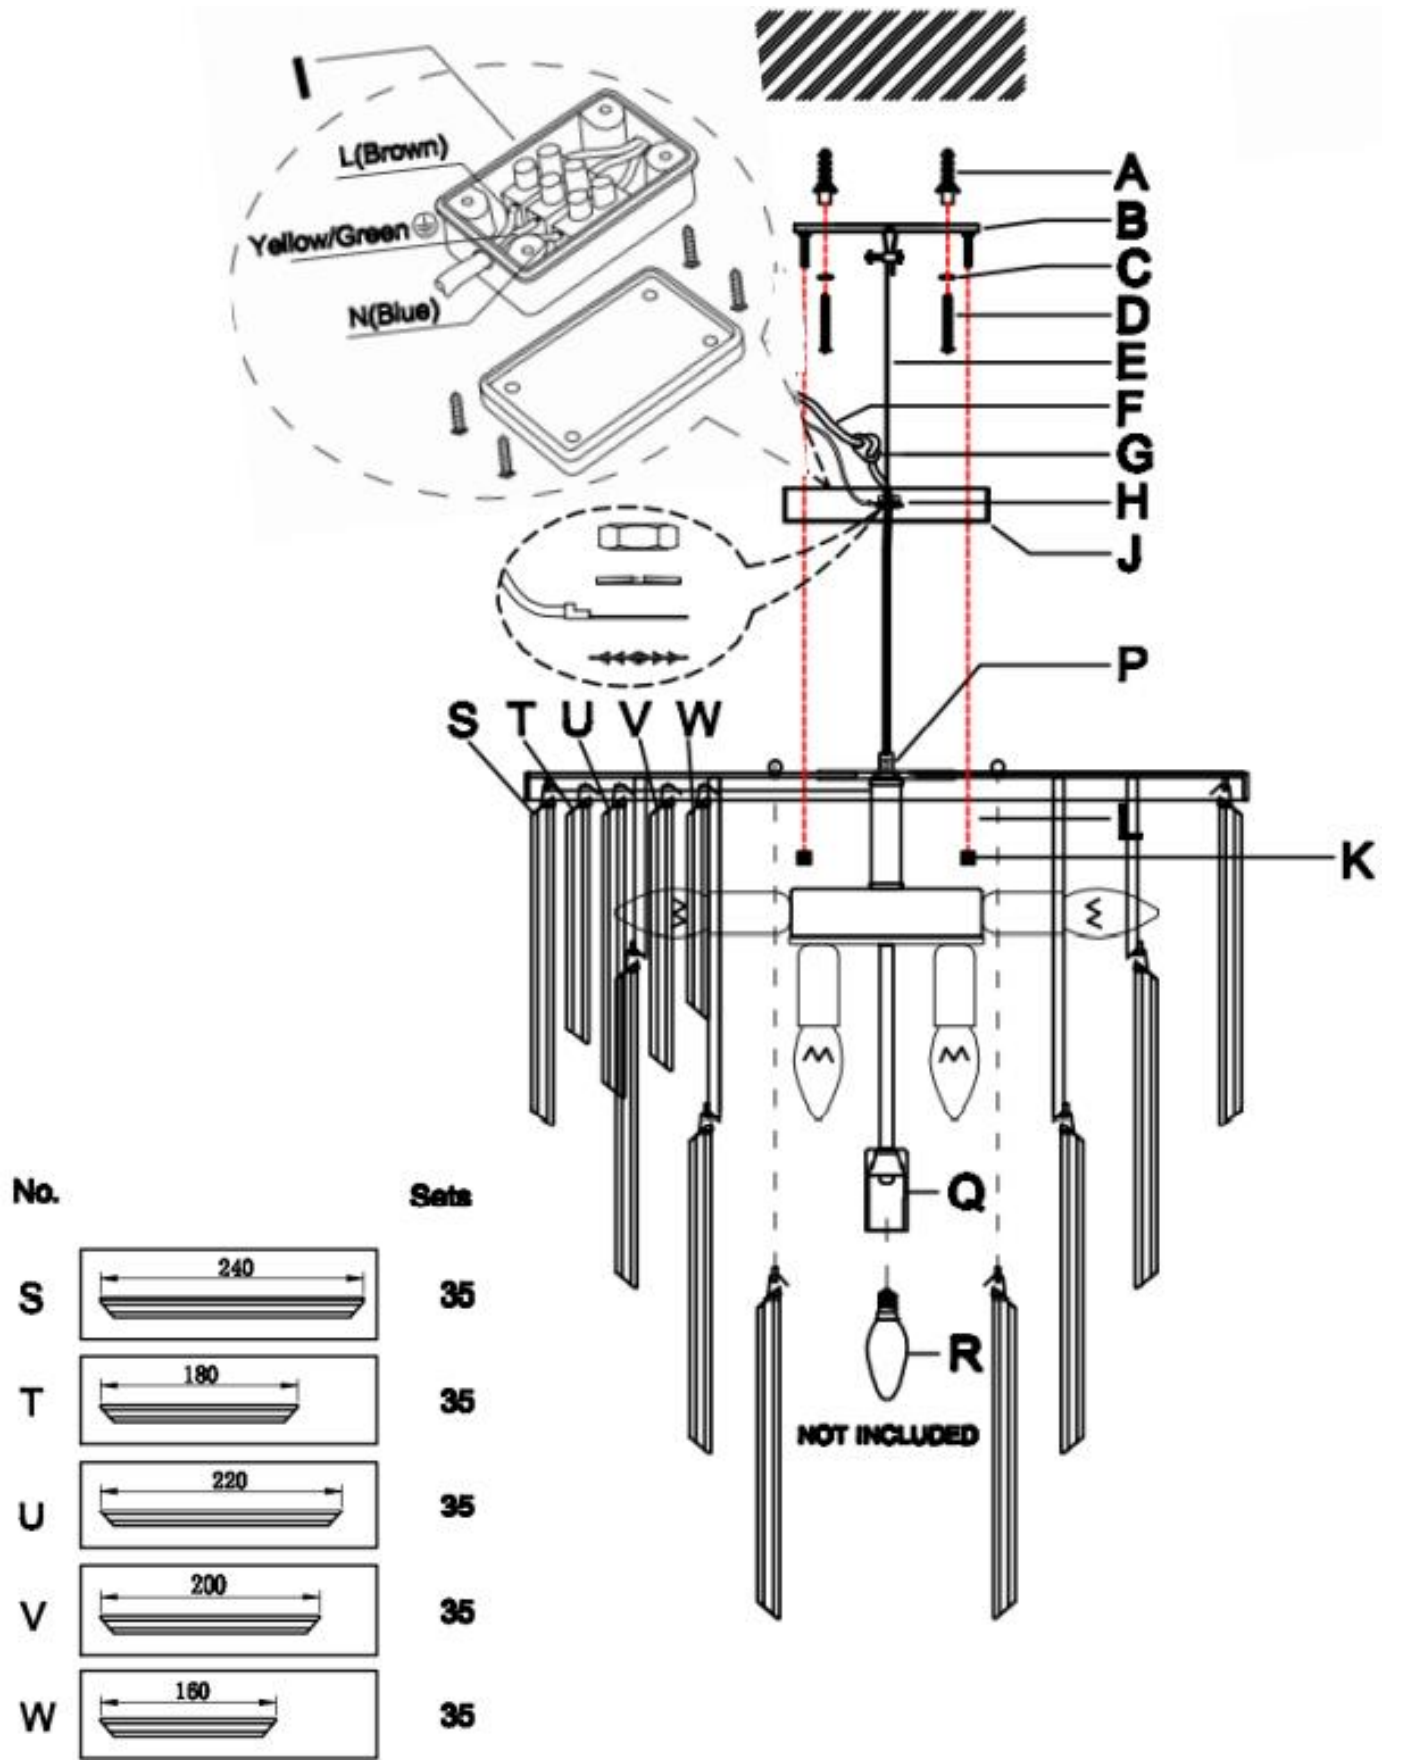

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	050668	056071
Colour	Bronze with Sepia Glass	Chrome with Clear Glass
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	252W Max. (9 x Max. 28W)	
Lamp Holder	SES / E14	
Weight	11.3kg	
Canopy Dimensions	H:25mm Dia:150mm	
Pendent Luminaire Dimensions	H:660mm Dia:530mm Susp:1800mm MAX	
CTC Luminaire Dimensions	H:680mm Dia:530mm	