

VINCI 17 LIGHT CHANDELIER / CLOSE-TO-CEILING ADAPTABLE

SKU# 050682, 050683.

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for use in indoor environments only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing the luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing, or have been damaged during transport, before assembling. Do not operate/install any luminaire which appears damaged in any way. If parts are missing or damaged, return the complete luminaire to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Options

Select the type of installation you require before assembly and installation:

- a. This luminaire can be installed as either a:

Pendant luminaire (See page 2 for installation instructions and pages 3,4,5 for installation diagram)

OR

Close-to-Ceiling luminaire (See page 6 for installation instructions and pages 7,8,9 for installation diagram)

- b. Refer to the corresponding installation instructions and installation diagram for the different installation methods.

NOTE: Assembly and installation of this luminaire must be done by a licensed electrician.

NOTE: Due to the luminaire's size & weight, two people are required to lift it up during the installation.

PENDANT INSTALLATION INSTRUCTIONS (Refer to the installation diagram on Pages 3,4,5)

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away parts or accessories that may be hidden within the packaging material. Check and confirm that all components, parts and accessories are present.
Part A x1, Part B x74, Part C x1, Part D x4, Part E x4, Part F x2, Part G x2, Part H x2, Part I x2.
2. To help with assembly, place the luminaire, parts and accessories on a smooth non-scratch surface.
3. Remove the mounting bracket from the canopy, by loosening the knobs at the front of the canopy. (Fig. 1)
4. Install the rods onto the luminaire by twisting it clockwise onto the threaded nut at the top of the luminaire. (Fig. 2)

NOTE: Avoid cross-threading the rod and nut and do not twist the cord during assembly.

Pull and hold the cord from the top during assembly to prevent it from twisting.

Check the cord after every three turns when threading the rod onto the nut.

If the cord is twisted, untwist by turning the cord anti-clockwise.

5. Secure the rod by tightening the grub screw on the side with the allen key provided. (Fig.2)
6. Use the mounting bracket as a template to mark the screw hole positions on the ceiling. (Fig. 3)

NOTE: The mounting point must support 2 times the weight of the luminaire.

7. Loop the steel cable safety lanyard from the luminaire through the mounting bracket at both ends. (Fig. 4)
8. Insert the steel cable safety lanyard through the cable clamp and tighten the screw. (Fig. 4)
9. Determine the suspension length required for your installation location. The chain suspension length can be adjusted by adjusting the position of the D-shaped chain link connectors. Excess cable can be pulled into the canopy and secured using the plastic Figure-8 cable anchorage and excess chain can be removed using chain-separating pliers. After adjusting the chain suspension length, check and ensure that NO load/weight is placed on the cable, and the full weight of the pendant is on the chain suspension. Install the chain suspension onto the canopy by attaching the D-shaped chain connector onto the canopy. (Fig. 4)
10. Depending on the mounting surface, determine if anchors or mounting accessories are required for installation. If they are required, ensure they are suitable for the mounting surface and the surrounding environment. (Fig. 5)
11. Install the mounting bracket onto the ceiling by using appropriately sized mounting screws. Ensure the screws used are suitable for the mounting surface and the surrounding environment. (Fig. 5)
12. Feed luminaire wire through the chain suspension and up into the canopy. (Fig. 6)
13. Install the figure 8 cord anchorage onto the luminaire wire before the terminal block. (Fig. 6)
14. Connect the luminaire cord and the mains supply wire to the terminal block. (Fig. 6)

Mains Supply Wire

Earth – Yellow/Green
Neutral – Blue or Black
Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green or 
Blue or N
Brown or L

Ensure the wires are secure and no bare wires are exposed.

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

NOTE: Ensure the earth wire from the mounting bracket is connected to the terminal block. (Fig. 6)

15. Install the canopy back onto the mounting bracket by securing the nuts at the front of the canopy. (Fig. 7)


NOTE: Check and ensure the chain suspension and the steel cable safety lanyard is not squashing or rubbing on the luminaire cord.

NOTE: The load/weight of the pendant MUST always be on the chain suspension, NOT the luminaire cord. Check this by ensuring the chain suspension is in tension. The luminaire cord must NOT be in tension, and should hang loosely around the chain suspension.


16. Install lamps (not included) into the lamp holders. Do not exceed the maximum wattage rating. (Fig. 8)

17. Remove the nut and washer from the luminaire frame in the lowest row. (Fig. 9)
 18. Hang the alabaster shades (22pcs) onto the luminaire frame in the lowest row and secure them by reinstalling the washer and nut. (Fig. 9)
 19. Hang the alabaster shades onto luminaire frame in the middle row (24pcs), followed by the top row (28pcs). (Fig. 9)
- After the installation is fully completed, switch on the luminaire to test and enjoy your new lighting product. (Fig. 10)


PENDANT INSTALLATION DIAGRAM (Refer to the installation steps on Page 2)

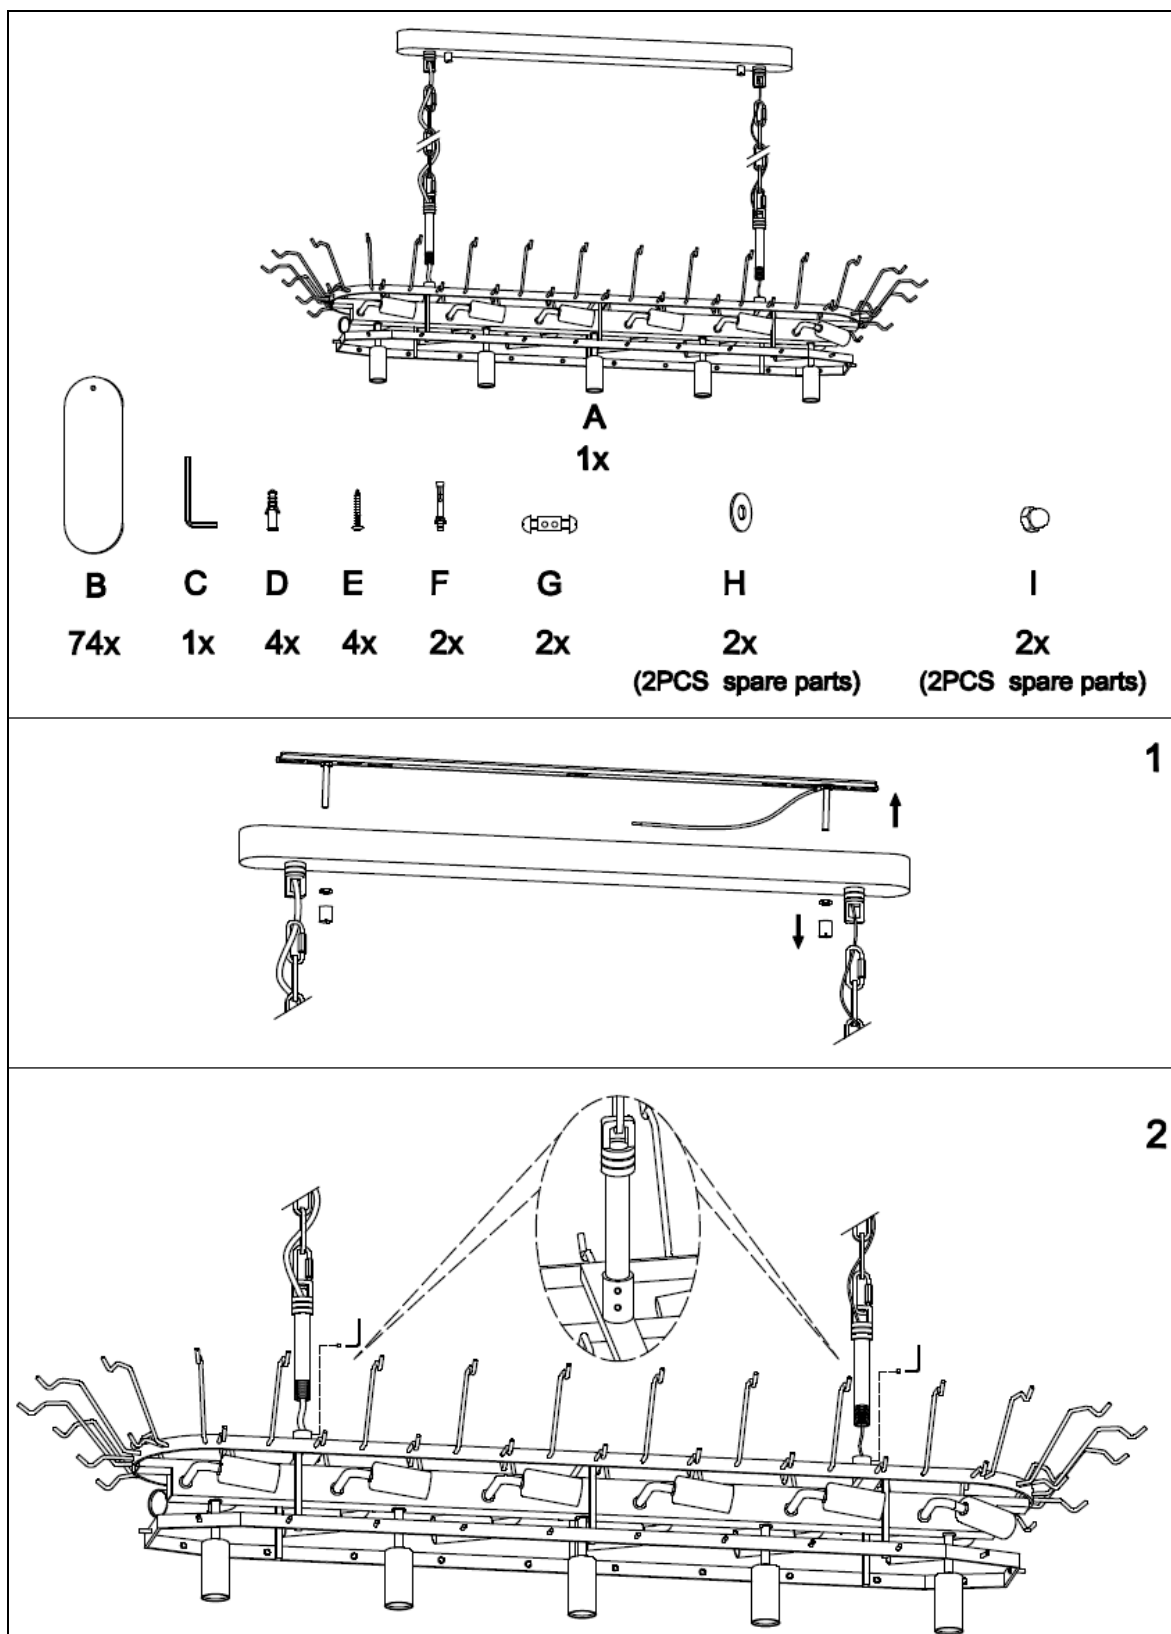

PENDANT INSTALLATION DIAGRAM (Refer to the installation steps on Page 2)

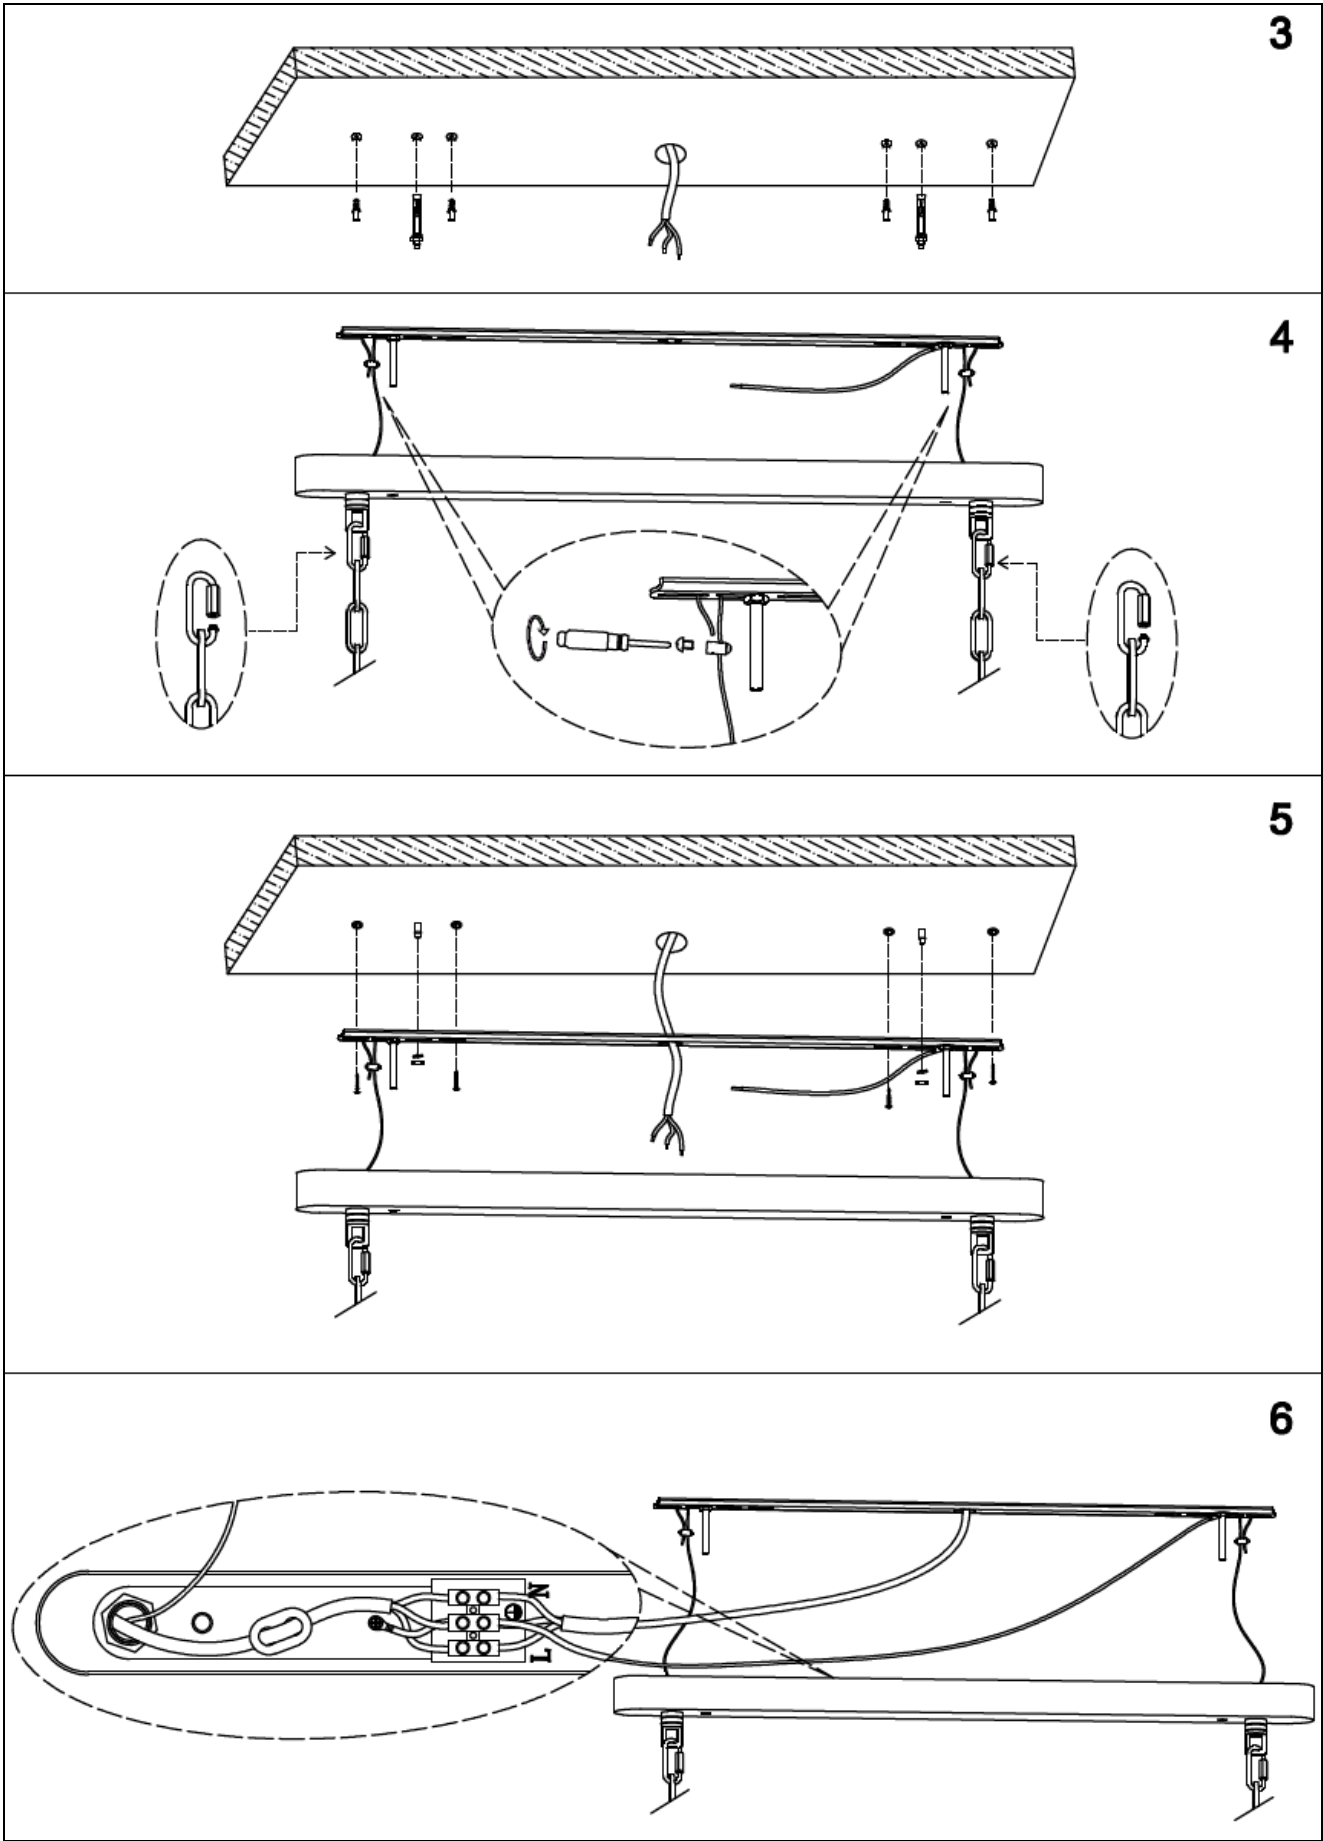

PENDANT INSTALLATION DIAGRAM (Refer to the installation steps on Page 2)

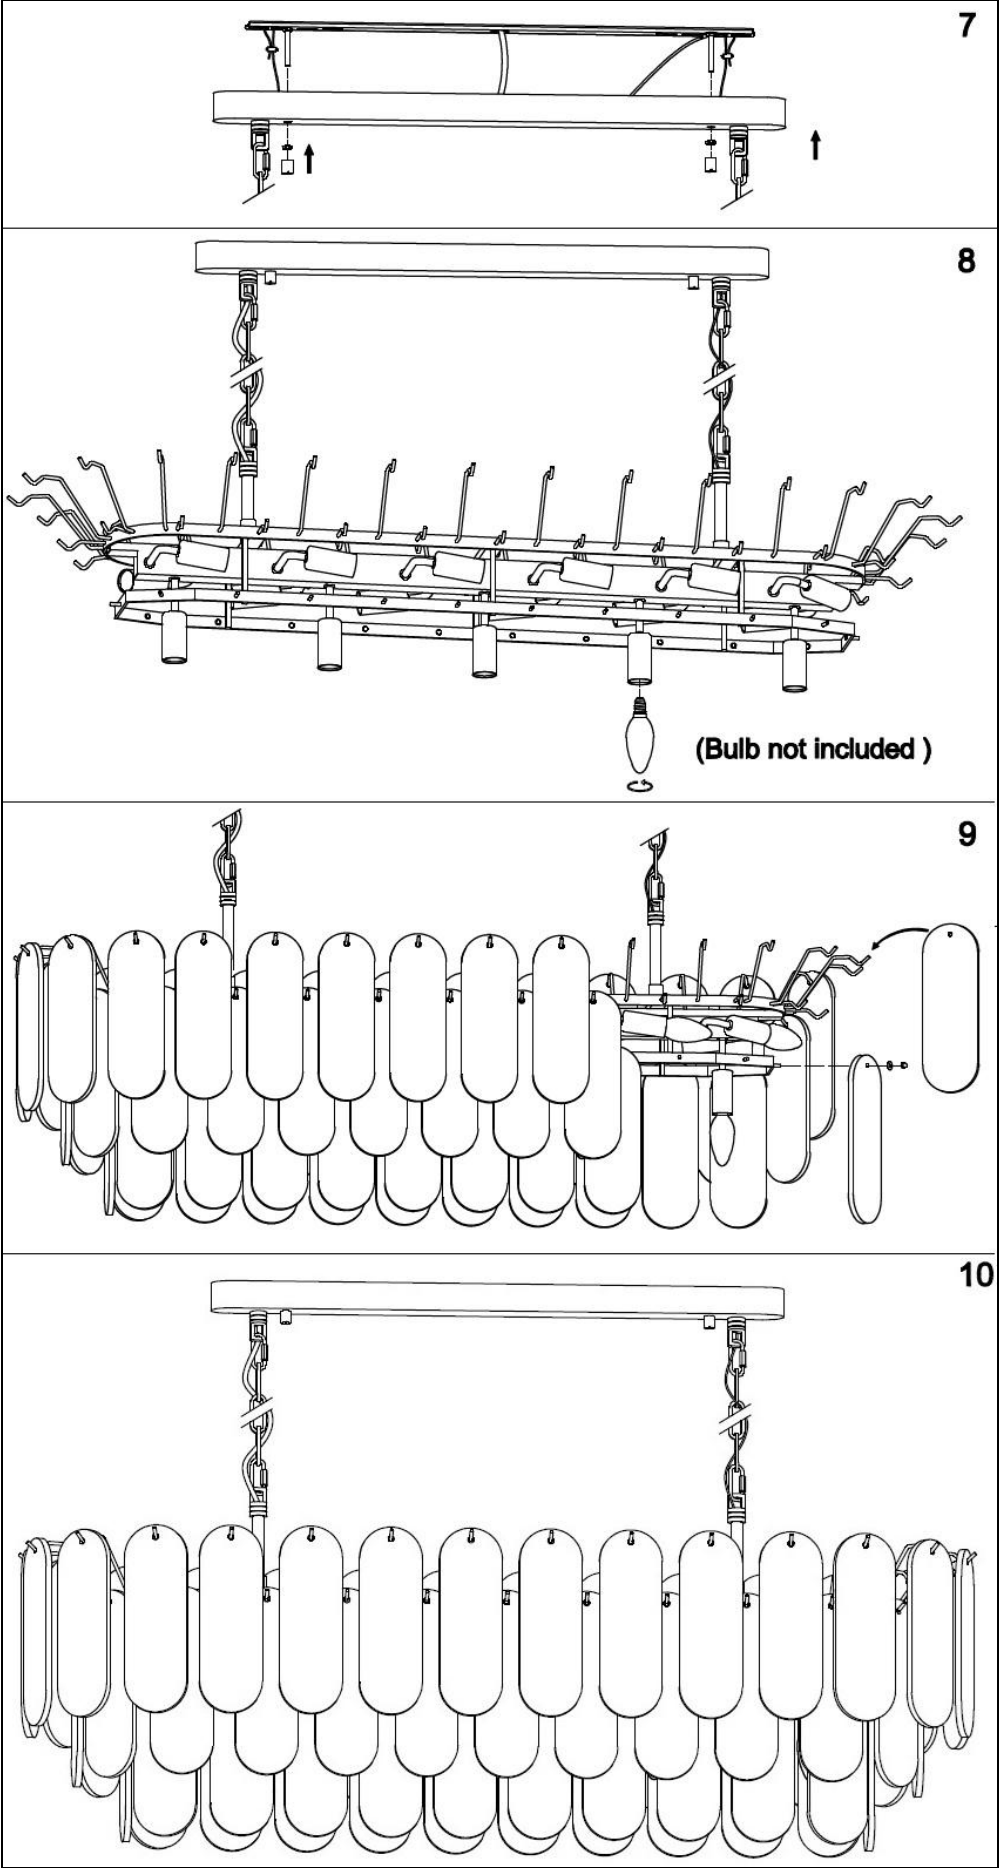

CLOSE TO CEILING INSTALLATION INSTRUCTIONS (Refer to the installation diagram on Pages 7,8,9)

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away parts or accessories that may be hidden within the packaging material. Check and confirm that all components, parts and accessories are present.
Part A x1, Part B x74, Part C x1, Part D x4, Part E x4, Part F x2, Part G x2, Part H x2, Part I x2.
2. To help with assembly, place the luminaire, parts and accessories on a smooth non-scratch surface.
3. Remove the mounting bracket from the canopy, by loosening the knobs at the front of the canopy. (Fig. 1)
4. Install the rods onto the luminaire by twisting it clockwise onto the threaded nut at the top of the luminaire. (Fig. 2)

NOTE: Avoid cross-threading the rod and nut and do not twist the cord during assembly.

Pull and hold the cord from the top during assembly to prevent it from twisting.

Check the cord after every three turns when threading the rod onto the nut.

If the cord is twisted, untwist by turning the cord anti-clockwise.

5. Secure the rods by tightening the grub screw on the side with the allen key provided. (Fig. 2)
6. Remove the hanging brackets from the canopy, by loosening the hex nut inside the canopy. Ensure to keep the hex nut, spring washer and tooth lock washer in a safe place, they will be needed for re-installation later. (Fig. 3)
7. Remove the hanging brackets from the rods, by loosening the grub screw on the side with the allen key provided. (Fig. 4)
8. Feed the luminaire wire through the canopy and install the canopy onto the top of the threaded rod. Secure it by installing the tooth lock washer followed by the spring washer and tighten together with the hex nut. (Fig. 5)
9. Use the mounting bracket as a template to mark the screw hole positions on the ceiling. (Fig. 6)

NOTE: The mounting point must support 2 times the weight of the luminaire.

10. Loop the steel cable safety lanyard from the luminaire through the mounting bracket at both ends. (Fig. 7)
11. Insert the steel cable safety lanyard through the cable clamp and tighten the screw. (Fig. 7)
12. Depending on the mounting surface, determine if anchors or mounting accessories are required for installation.
If they are required, ensure they are suitable for the mounting surface and the surrounding environment. (Fig. 8)
13. Install the mounting bracket onto the ceiling by using appropriately sized mounting screws. Ensure the screws used are suitable for the mounting surface and the surrounding environment. (Fig. 8)
14. Install the figure 8 cord anchorage onto the luminaire wire before the terminal block. (Fig. 9)
15. Connect the luminaire wire and the mains supply wire to the terminal block. (Fig. 9)

Mains Supply Wire

Earth – Yellow/Green
Neutral – Blue or Black
Live – Brown or Red

Luminaire Wire / Terminal Block


Yellow/Green or 
Blue or N
Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.


NOTE: Ensure the earth wire from the mounting bracket is connected to the terminal block. (Fig. 9)

16. Ensure the wires are secure and no bare wires are exposed.
17. Install the canopy back onto the mounting bracket by securing the nuts at the front of the canopy. (Fig. 10)
18. Install lamps (not included) into the lamp holders. Do not exceed the maximum wattage rating. (Fig. 11)
19. Remove the nut and washer from the luminaire frame in the lowest row. (Fig. 12)
20. Hang the alabaster shades (22pcs) onto the luminaire frame in the lowest row and secure them by reinstalling the washer and nut. (Fig. 12)
21. Hang the alabaster shades onto luminaire frame in the middle row (24pcs), followed by the top row (28pcs). (Fig. 12)
22. After the installation is fully completed, switch on the luminaire to test and enjoy your new lighting product. (Fig. 13)


CLOSE TO CEILING INSTALLATION DIAGRAM (Refer to the installation steps on Page 6)

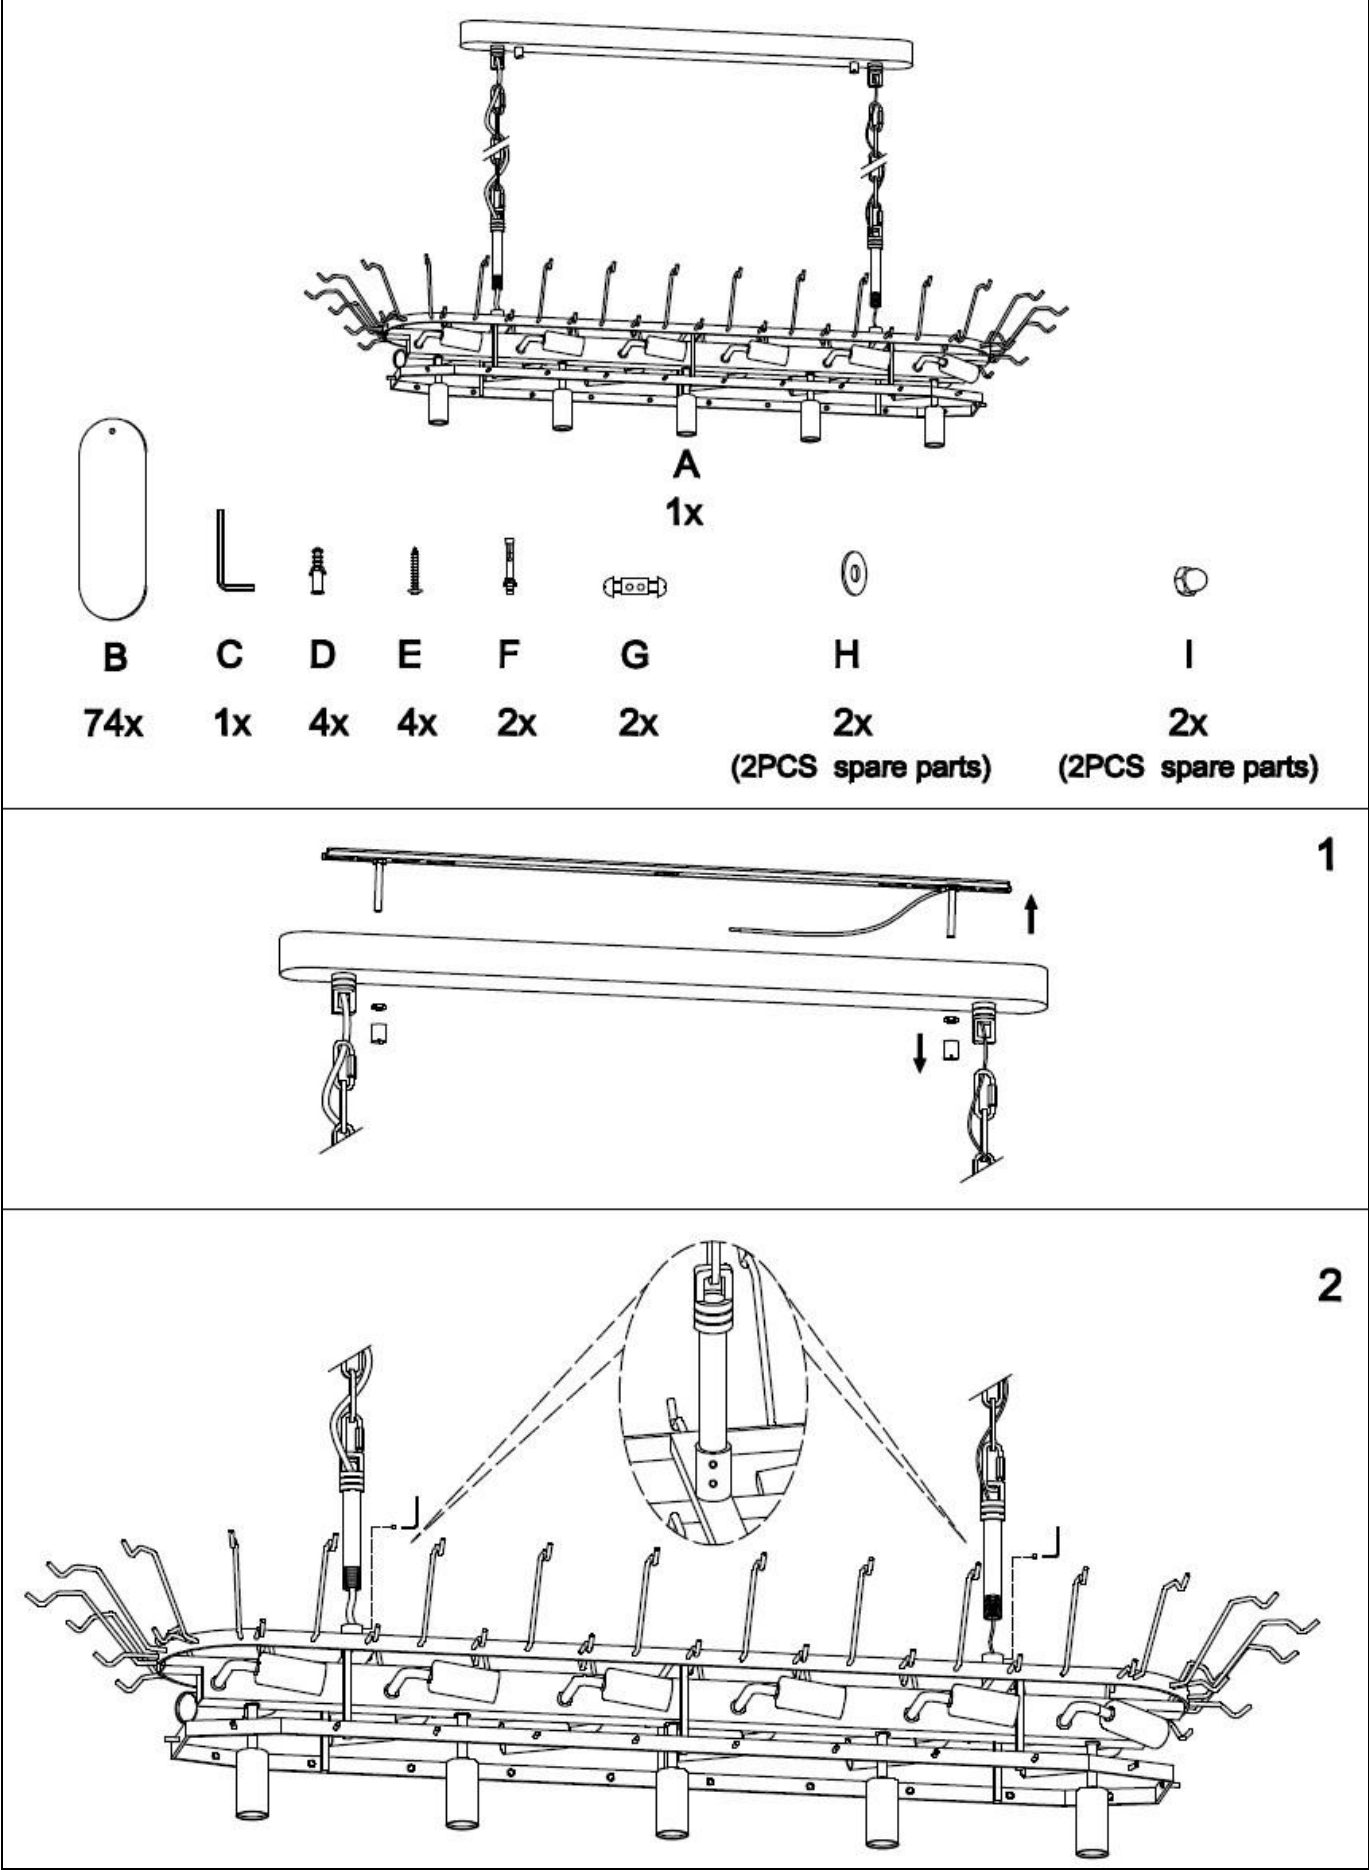

CLOSE TO CEILING INSTALLATION DIAGRAM (Refer to the installation steps on Page 6)

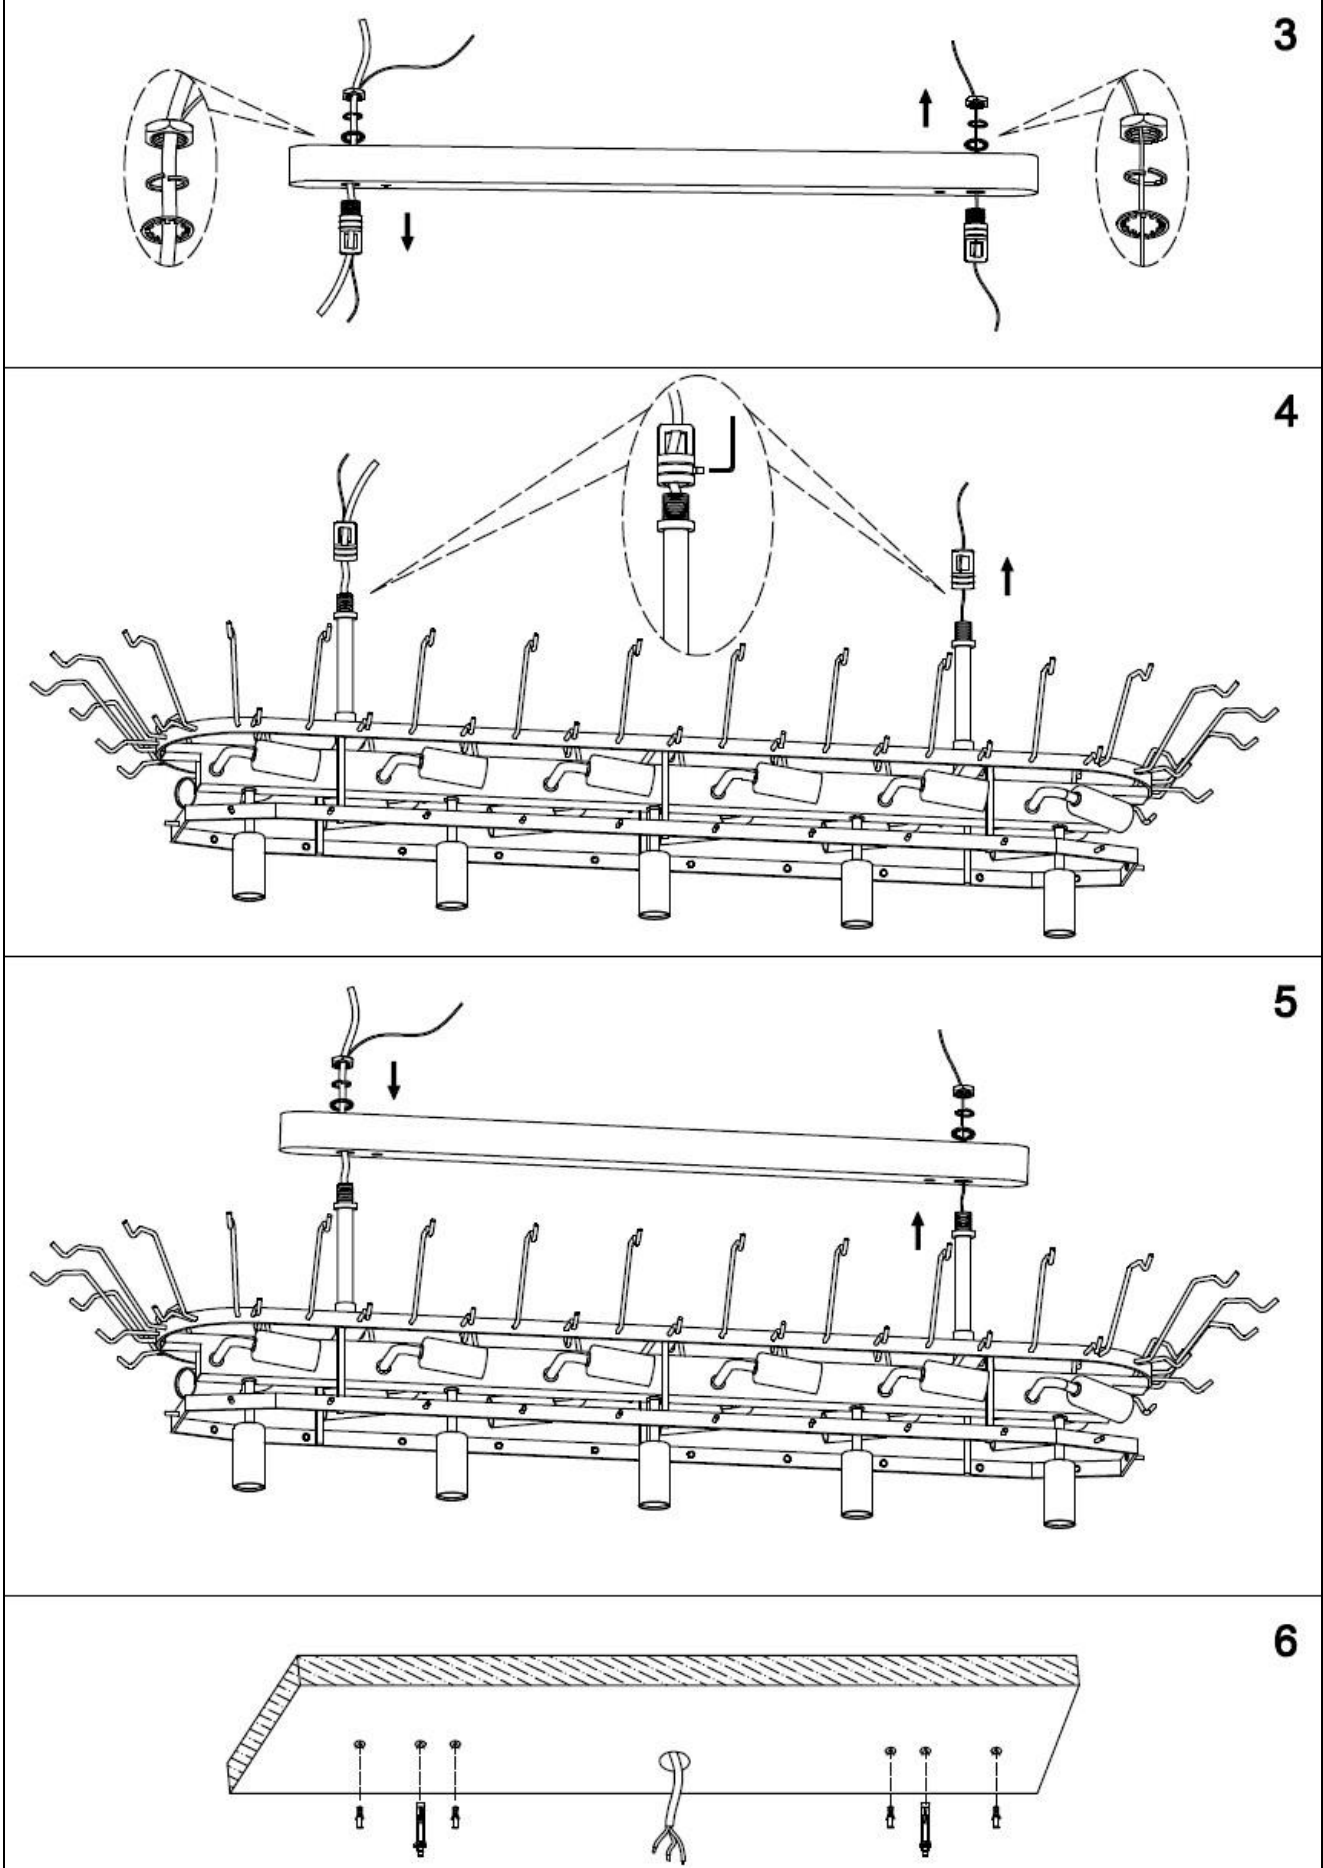

CLOSE TO CEILING INSTALLATION DIAGRAM (Refer to the installation steps on Page 6)

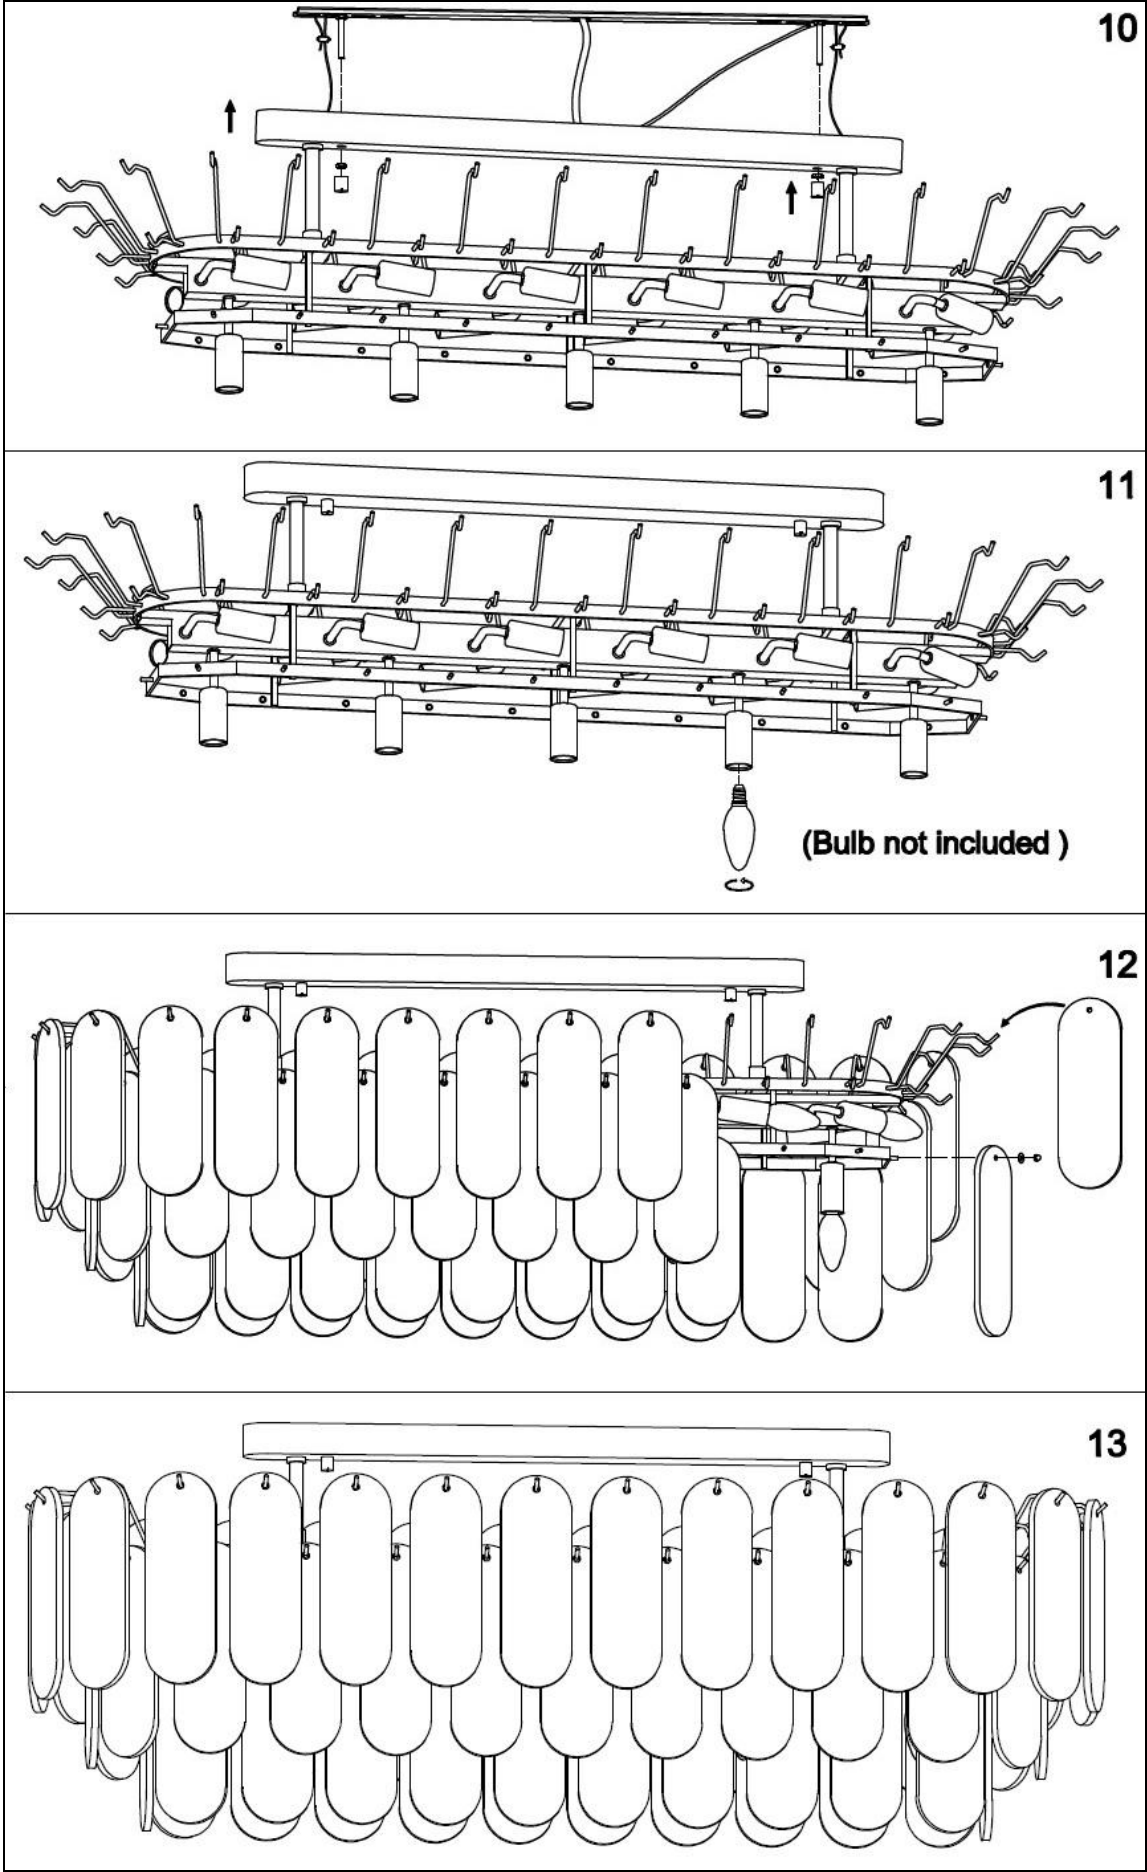

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globes or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	050682	050683
Colour	Aged Brass Finish with White Alabaster	Bronze Finish with Hazel Alabaster
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	476W Max (17x Max. 28W)	
Lamp Holder	SES / E14	
Weight	28.9kg	
Canopy Dimensions	H:35mm L:700mm W:50mm	
Luminaire Dimensions	H:480mm L:1180mm W:480mm Susp:2000mm MAX	