

## OAKLEIGH 1 LIGHT PENDANT

SKU# 050684.

Rated Voltage 220-240V~ 50Hz.

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.  
e.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire must be used with a LED lamp only.
- The maximum allowable height of the G9 lamp is 42mm.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This luminaire is suitable for use in indoor environments only.
  - The mounting point must support 2 times the weight of the luminaire.
  - If installing the luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing, or have been damaged during transport, before assembling. Do not operate/install any luminaire which appears damaged in any way. If parts are missing or damaged, return the complete luminaire to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation Directions

- Select the type of installation you require before assembly and installation:
  - This pendant luminaire can be installed as either a:  
**Surface mount canopy** (see pages 2 and 3)  
OR  
**Recessed mount canopy** (see pages 4 and 5).
  - Refer to the corresponding installation steps and installation diagram for the different installation methods.

**NOTE: Assembly and installation of this luminaire must be done by a licensed electrician.**

## **SURFACE MOUNT CANOPY INSTALLATION STEPS (Refer to the installation diagram on Page 3)**

**WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.**

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, place the luminaire on a smooth non-scratch surface.
2. Use the mounting bracket as a template to mark the screw hole positions on the ceiling. (Fig. 1)
3. Depending on the mounting surface, determine if anchors or mounting accessories are required for installation. If they are required, ensure they are suitable for the mounting surface and the surrounding environment. (Fig. 1)
4. Pull the mains supply wire down and out from the ceiling to help for easier connection and installation. (Fig. 1)
5. Add the surface mount canopy to the luminaire by placing it over the mounting bracket. (Fig. 2)
6. Determine the required length of the suspension cord for your installation. If adjustment is required, set the suspension cord to the desired length by pushing excess cable up into the canopy, and then securing the suspension using the plastic Figure-8 cord anchor. Then, prepare the canopy for installation by pulling the terminal blocks out from the canopy. (Fig. 3)
7. Insert the mains supply wire through the back of the canopy and install the mounting bracket onto the ceiling by using appropriately sized mounting screws. Ensure the screws used are suitable for the mounting surface and the surrounding environment. (Fig. 4)
8. Connect the mains supply wire to the terminal block. (Fig. 5)

### **Mains Supply Wire**

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

### **Luminaire Wire / Terminal block**

Yellow/Green or 

Blue or N

Brown or L

9. Ensure the wires are secure, and no bare wires are exposed.

**NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.**

10. Lift and hold the canopy up and over the mounting bracket. Slide the canopy plate and anchorage up to the bottom of the canopy and ensure the canopy is flush on the ceiling. (Fig. 6)
11. Secure the canopy and canopy plate by threading the anchorage onto the bolt at the bottom of the mounting bracket and then secure the anchorage by tightening the screw on the side. (Fig. 7)
12. Install a LED G9 lamp (not included) into the lamp holder. Do not exceed the maximum wattage rating. (Fig. 8)

**NOTE: This luminaire must be used with a LED lamp only.**


**NOTE: The maximum allowable height of the G9 lamp is 42mm.**

13. Install the shade by threading it onto the lamp holder assembly. (Fig. 9)
14. After the installation is fully completed, switch on the luminaire to test and enjoy your new lighting product.

## **RELAMPING**

1. Ensure the power is turned OFF to the luminaire and the lamp is fully cooled down before relamping.
2. Hold the luminaire body and suspension cord to prevent it from rotating or twisting.
3. Remove the shade from the luminaire by twisting it anticlockwise.
4. Pull the old G9 lamp from the lamp holder and replace with a new G9 lamp.
5. Reinstall the shade back onto the luminaire by twisting it clockwise.

**SURFACE MOUNT CANOPY INSTALLATION DIAGRAM** (Refer to the installation steps on Page 2)

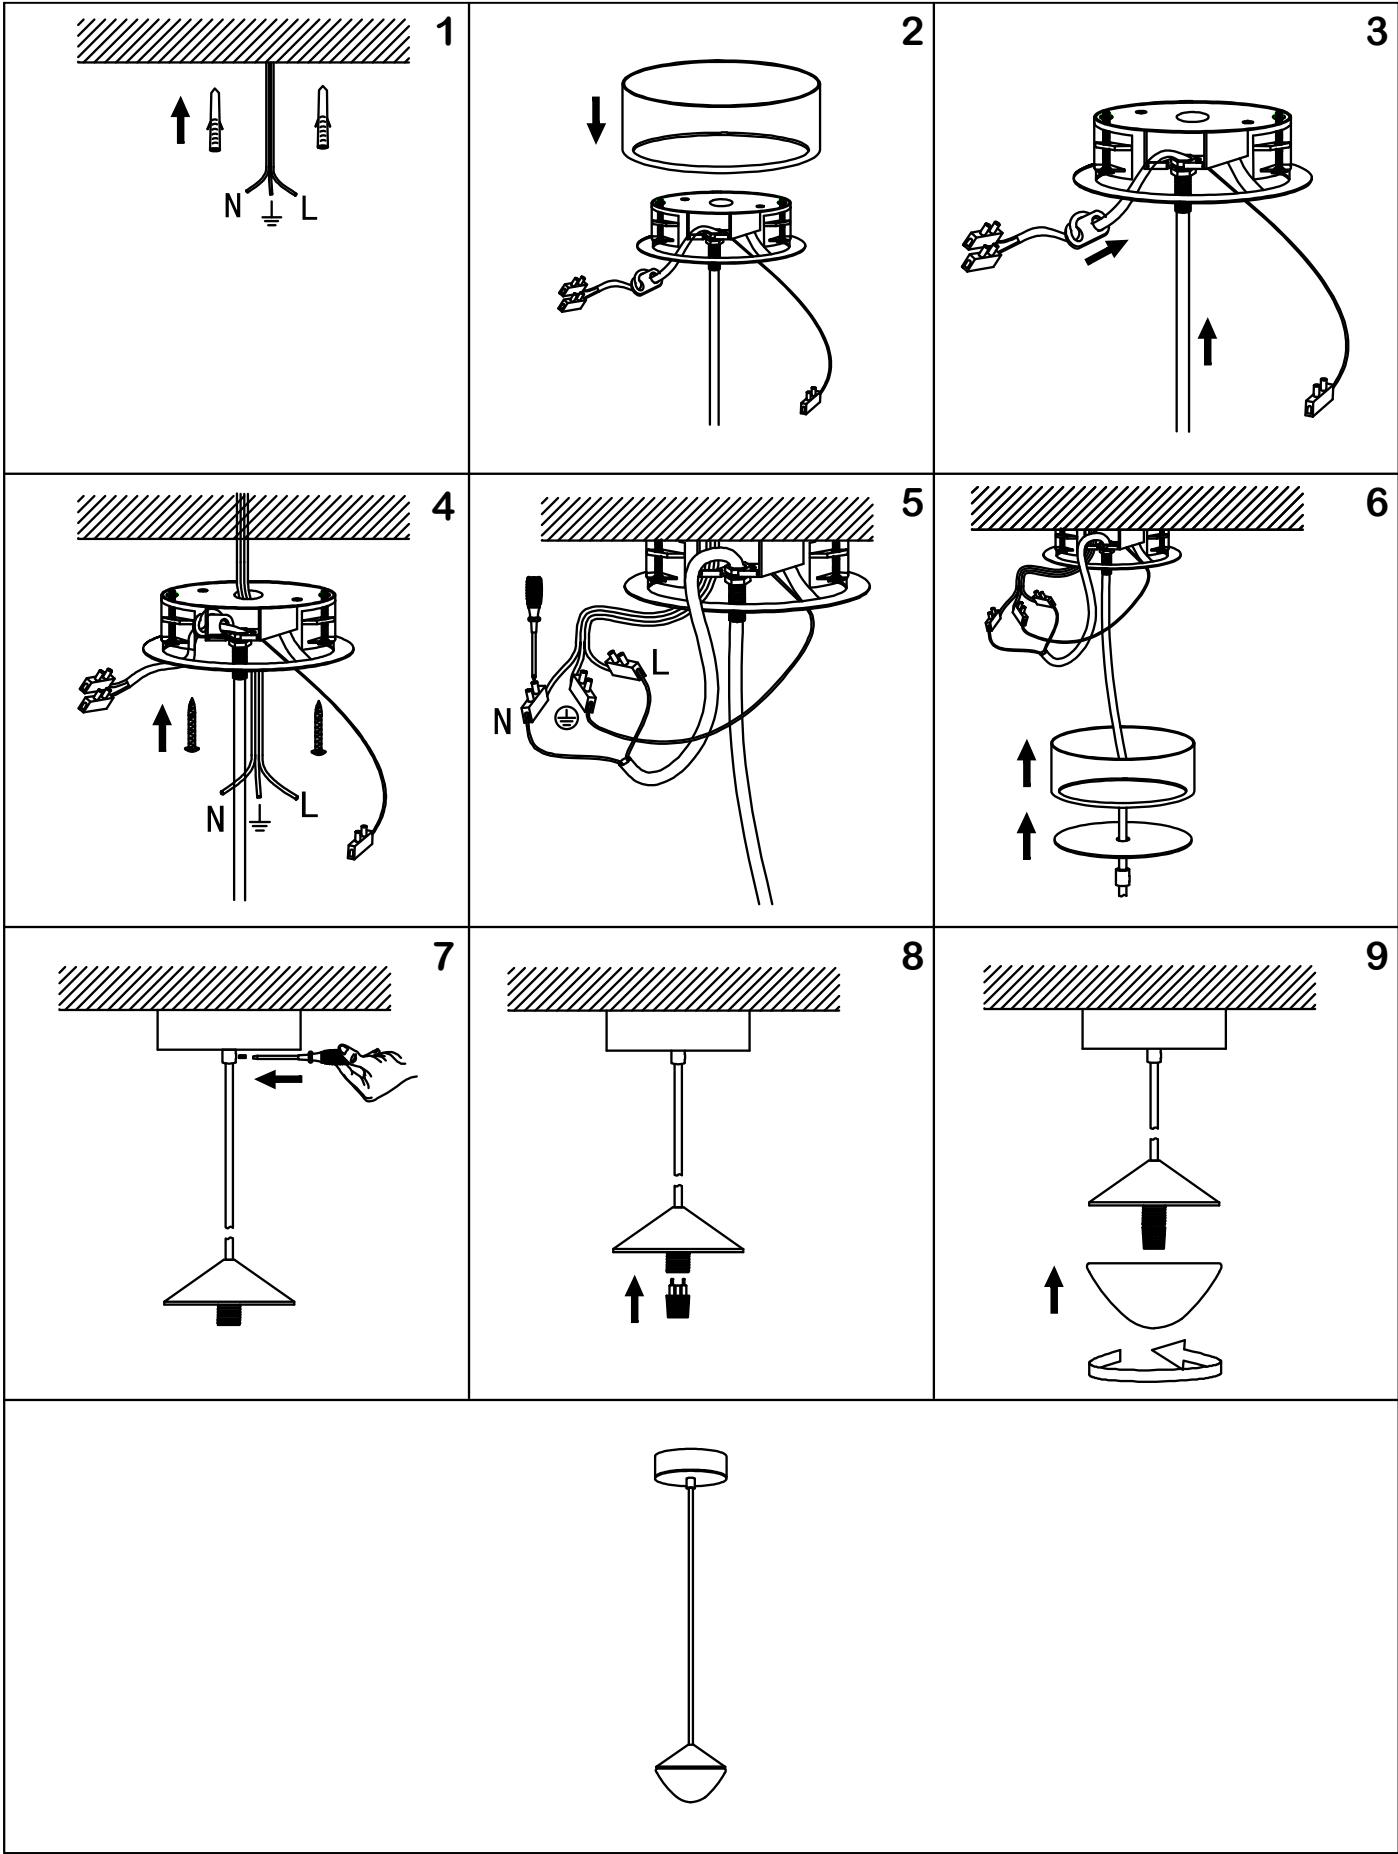

## RECESSED MOUNT CANOPY INSTALLATION STEPS (Refer to the installation diagram on Page 5)

**WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work**

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, place the luminaire on a smooth non-scratch surface.
2. Cut an installation hole of Ø92mm diameter into the ceiling. (Fig. 1)
3. Pull the mains supply wire down and out from the ceiling to help for easier connection and installation. (Fig. 1)
4. Determine the required length of the suspension cord for your installation. If adjustment is required, set the suspension cord to the desired length by pushing excess cable up into the canopy, and then securing the suspension using the plastic Figure-8 cord anchor. Then, prepare the canopy for installation by pulling the terminal blocks out from the canopy. (Fig. 3)
5. Insert the mains supply wire through the back of the recessed mounting bracket and then insert the recessed mounting bracket into the installation hole, making sure the clamping brackets on either side are rotated to sit inside the mounting bracket. (Fig. 3)
6. Secure the recessed mounting bracket onto the ceiling by rotating the screws clockwise, making sure the clamping brackets swing out from the mounting bracket and clamp down onto the mounting surface. (Fig. 4)
7. Connect the mains supply wire to the terminal block. (Fig. 5)

### Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

### Luminaire Wire / Terminal block

Yellow/Green or 

Blue or N

Brown or L

8. Ensure the wires are secure, and no bare wires are exposed.

**NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.**

9. Slide the canopy plate and anchorage up to the bottom of the recessed canopy and ensure it is flush on the ceiling. (Fig. 6)
10. Secure the canopy plate by threading the anchorage onto the bolt at the bottom of the mounting bracket and then secure the anchorage by tightening the screw on the side. (Fig. 7)
11. Install a LED G9 lamp (not included) into the lamp holder. Do not exceed the maximum wattage rating. (Fig. 8)

**NOTE: This luminaire must be used with a LED lamp only.**


**NOTE: The maximum allowable height of the G9 lamp is 42mm.**

12. Install the shade by threading it onto the lamp holder assembly. (Fig. 9)
13. After the installation is fully completed, switch on the luminaire to test and enjoy your new lighting product.

## RELAMPING

1. Ensure the power is turned OFF to the luminaire and the lamp is fully cooled down before relamping.
2. Hold the luminaire body and suspension cord to prevent it from rotating or twisting.
3. Remove the shade from the luminaire by twisting it anticlockwise.
4. Pull the old G9 lamp from the lamp holder and replace with a new G9 lamp.
5. Reinstall the shade back onto the luminaire by twisting it clockwise.

RECESSED MOUNT CANOPY INSTALLATION DIAGRAM (Refer to the installation steps on Page 4)

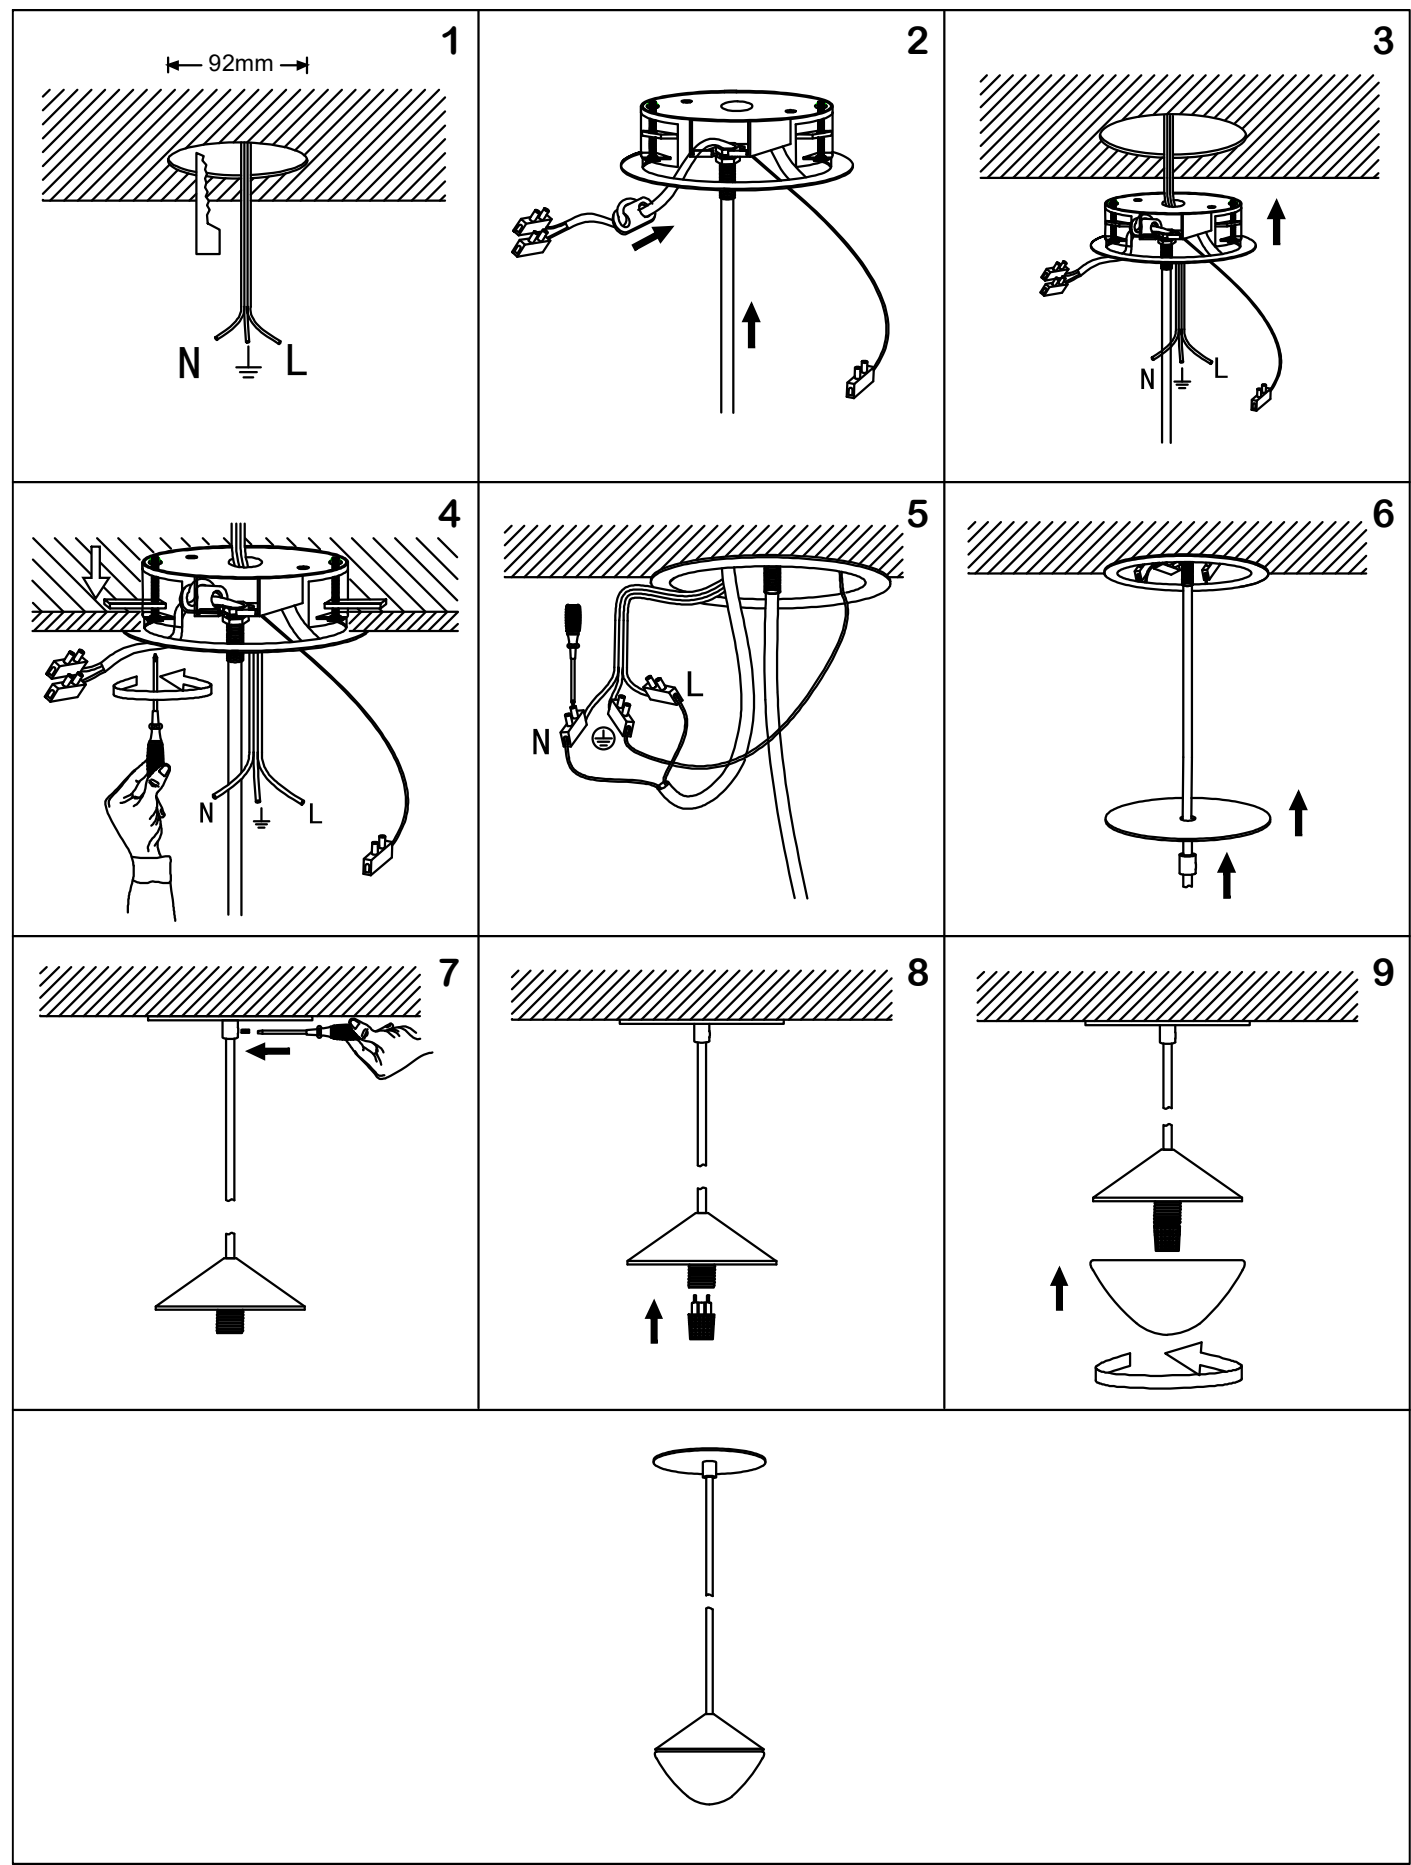

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamp or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

## Specifications

|                            |                                                  |
|----------------------------|--------------------------------------------------|
| SKU #                      | 050684                                           |
| Rated Voltage              | 220-240V~ 50Hz                                   |
| Rated Wattage              | 5W Max.<br>(LED lamp only)                       |
| Lamp Holder                | G9<br>(Maximum allowable height of lamp is 42mm) |
| Weight                     | 0.8kg                                            |
| Surface Canopy Dimensions  | H:40mm Dia:120mm                                 |
| Recessed Canopy Dimensions | H:0.8mm Dia:120mm                                |
| Luminaire Dimensions       | H:95mm Dia:110mm Suspension: 3000mm MAX          |