

OAKLEIGH 14 LIGHT DROP PENDANT

SKU# 050686.

Rated Voltage 220-240V~ 50Hz.

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire must be used with LED lamps only.
- The maximum allowable height of the G9 lamp is 42mm.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for use in indoor environments only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing the luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing, or have been damaged during transport, before assembling. Do not operate/install any luminaire which appears damaged in any way. If parts are missing or damaged, return the complete luminaire to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

NOTE: Assembly and installation of this luminaire must be done by a licensed electrician.

NOTE: Due to the luminaire's size & weight, two people are required to lift it up during the installation.

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket (B) from the canopy (G) by loosening the knobs (J).
3. Use the mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
4. Depending on the mounting surface, determine if anchors (A) or mounting accessories are required for installation. If they are required, ensure they are suitable for the mounting surface and the surrounding environment.
5. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C). Ensure the screws (C) used are suitable for the mounting surface and the surrounding environment.
6. Attach the safety lanyards (D) from the mounting bracket (B) onto the brackets (E) on the inside of the canopy (G).
7. Determine the required length of the suspension cord (I) for your installation. If adjustment is required, loosen the cord anchorage (H), set the suspension cord (I) to the desired length, and then re-tighten the cord anchorage (H).

NOTE: Take care not to overtighten the screw on the cord anchorage (H), as it may damage the cord (I).

8. Connect the mains supply wire and the earth cable from the mounting bracket (B) to the terminal block (F).

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal block

Yellow/Green or 

Blue or N

Brown or L

9. Ensure the wires are secure, and no bare wires are exposed.

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

10. Install the canopy (G) onto the mounting bracket (B) and secure by tightening the knobs (J).
11. Install LED G9 lamps (K - not included) into the lamp holders. Do not exceed the maximum wattage rating.


NOTE: This luminaire must be used with a LED lamps only.

NOTE: The maximum allowable height of the G9 lamp is 42mm.

12. Install the shades (L) onto the lamp holder assemblies.
13. After the installation, switch on the pendant to test and enjoy your new lighting product.

RELAMPING

1. Ensure the power is turned OFF to the luminaire and the lamp is fully cooled down before relamping.
2. Hold the luminaire and suspension cord to prevent it from rotating or twisting.
3. Remove the shade from the luminaire by twisting it anticlockwise.
4. Pull the G9 lamp from the lamp holder and replace with a new G9 lamp.

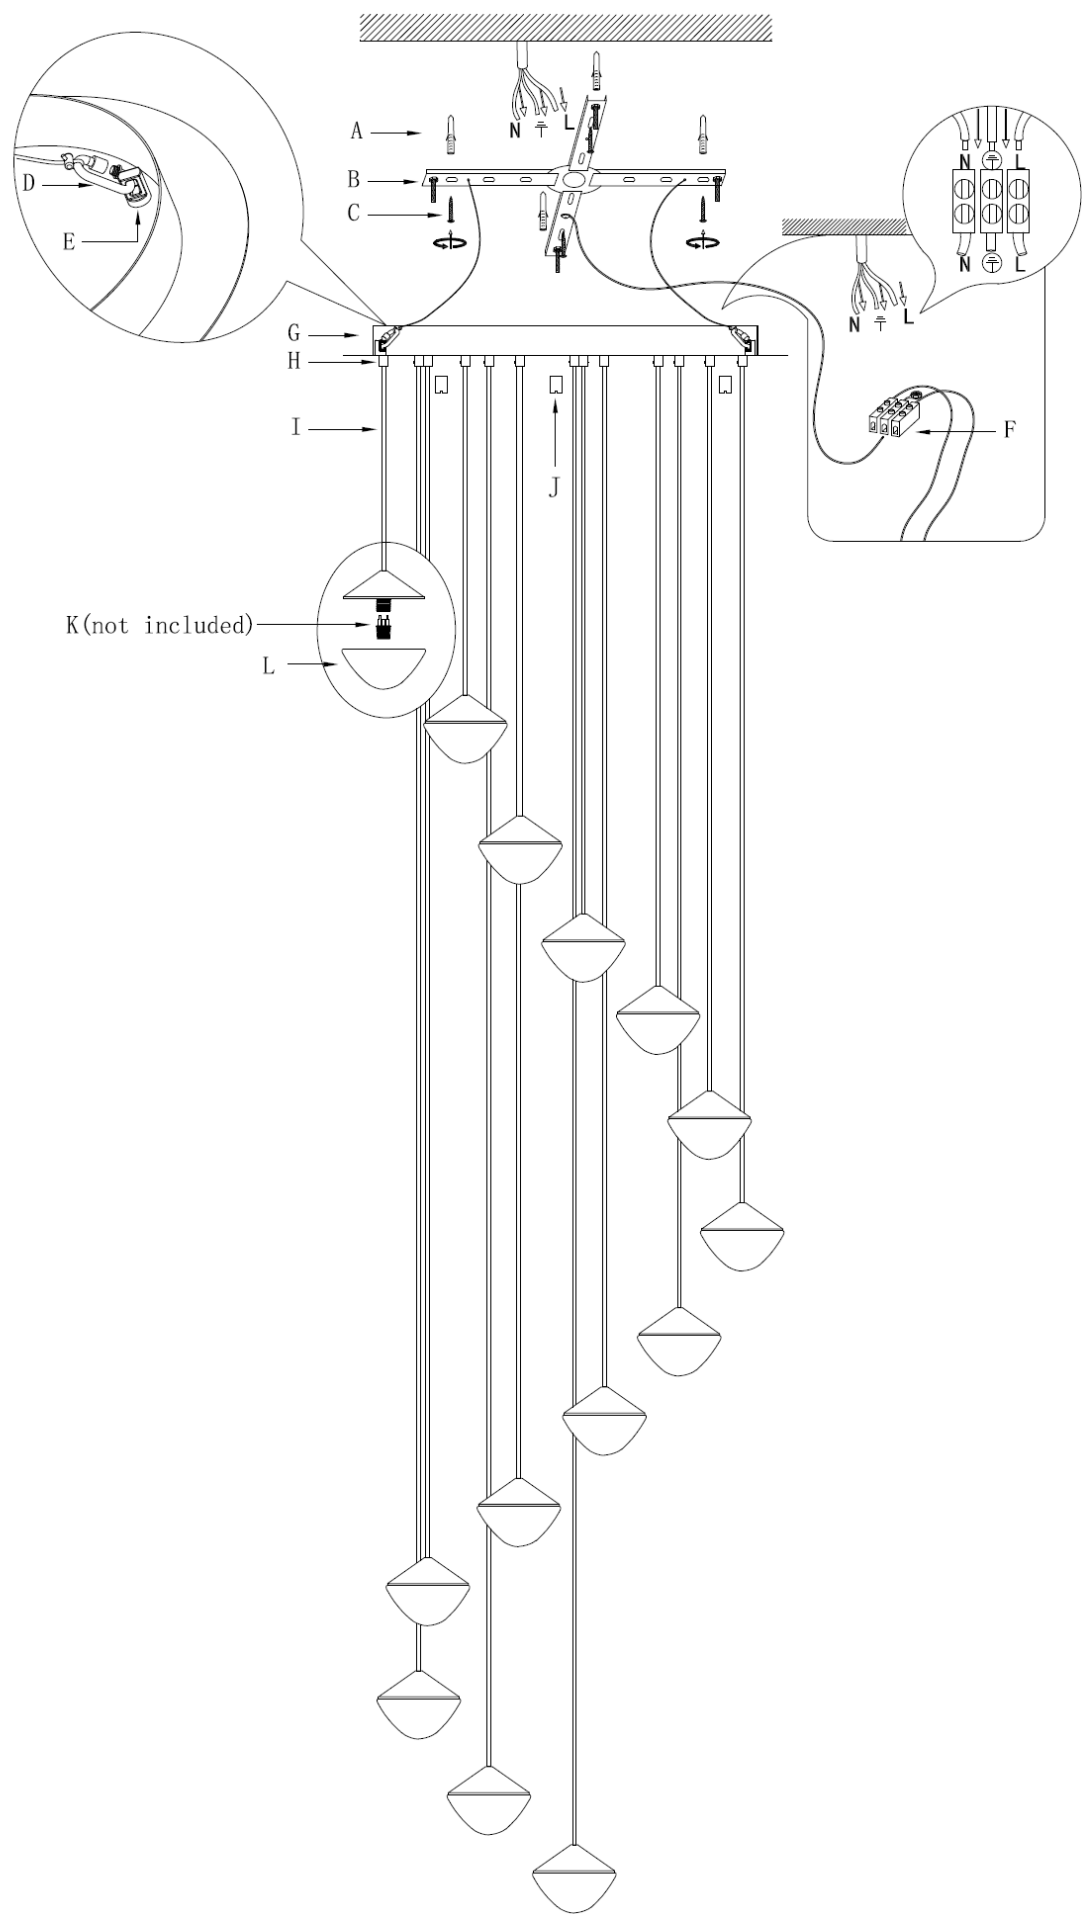

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamp or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	050686
Rated Voltage	220-240V~ 50Hz
Rated Wattage	70W Max. (14x Max. 5W) (LED lamp only)
Lamp Holder	G9 (Maximum allowable height of lamp is 42mm)
Shade	Opal Glass Shade (SKU# P050002)
Weight	11.5kg
Canopy Dimensions	H:40mm Dia:600mm
Luminaire Dimensions	H:95mm Dia:600mm Suspension: 5000mm MAX