

LOLA 1 LIGHT IP65 LED CCT STEP LIGHT

SKU# 221105, 221106, 221107

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5-years warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
E.g. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Select a suitable location for installation:
 - The mounting point must be able to support 2 times the weight of the luminaire.
 - This luminaire is protected against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions. This must be maintained during wiring and installation.
- The luminaire must not be used if the protective shield has cracked. Replace the protective shield before using the luminaire.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire will require replacement.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation Directions

- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work. (Fig.1)
1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
 2. Remove the shade from luminaire base by loosening the grub screws on the side with the supplied Allen key. (Fig.2)
 3. Use the luminaire base as a template to mark the screw positions on the wall. (Fig.3)
 4. Install the luminaire base onto the wall by using appropriately sized mounting screws with O rubber washer and anchors. (Fig.4 & Fig.5)
 5. Remove the terminal cover from the terminal block by loosening the screw. (Fig.6 & Fig.7)

NOTE: Keep the cover and screw in a safe place, they are required later for re-installation.

6. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed. (Fig.7)

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal label

Yellow/Green or 

Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

NOTE: Must install the terminal cover back onto the terminal block and secure using the screw. (Fig.7 & Fig.8)

7. Use the toggle switch in the luminaire to select the colour temperature – WW or NW or CW. (Fig9).


WW --- 3000K

NW --- 4000K

CW --- 5000K

8. Install the shade back onto the luminaire base and secure by tightening the grub screws on the side. (Fig.10)

9. After the installation is complete, switch on the luminaire to test and enjoy your new lighting product.

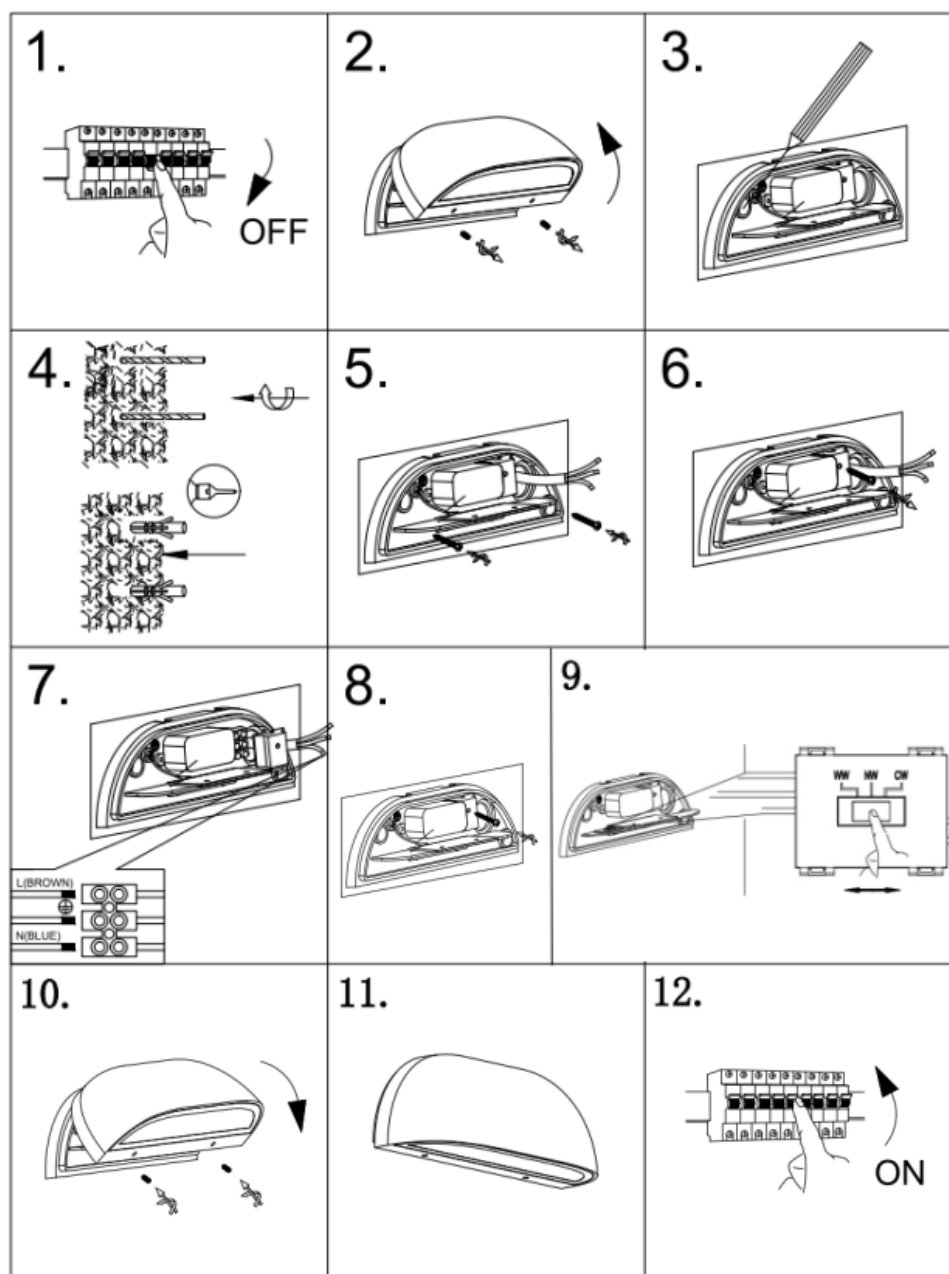

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The luminaire must not be used if the protective shield has cracked or damaged.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced.

Specifications

SKU #	221105	221106	221107
Colour/Finish	White	Black	Aged Bronze
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	6.5W		
LED Specs	Colour Switching LEDs*, Not dimmable, CRI>80		
Colour Temperature and Lumens	3000K – 430 lumens 4000K – 450lumens 5000K – 450 lumens		
IP Rating	IP65		
Weight	0.3kg		
Dimensions	H:58mm W:170mm E:45mm		

*Use the toggle switch in the luminaire to select the colour temperature - 3000K or 4000K or 5000K.