

FLINDERS CREVICE WALL SCONCE

SKU# 231380, 231381, 231382

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP65, this must be maintained during wiring and installation.
- Do not exceed the maximum wattage rating.
- This luminaire must be used with a LED lamp only.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor or outdoor use.
 - The mounting point must support 2 times the weight of the luminaire.
 - This luminaire is rated against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions.
- The luminaire must not be used if the protective shield has cracked. Replace any cracked protective shield before using the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing, or have been damaged during transport, before assembling. Do not operate/install any luminaire which appears damaged in any way. If parts are missing or damaged, return the complete luminaire to the place of purchase for inspection, repair or replacement.

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

- 1. Remove the protective shield (J) from the base (D) by loosening and removing the four locking screws (K).
 - 2. Position the base (D) against the mounting surface and use it as a template to mark the four mounting hole locations.
 - 3. Drill the four mounting holes in the marked positions. Ensure the holes are suitable for the mounting surface.
 - 4. Feed the mains supply wire through the back of the base (D).
 - 5. Secure the base (D) to the mounting surface using four appropriately sized mounting screws (F), washers (E) and anchors (A).
- Ensure all fixings used are appropriate for the mounting surface and surrounding environment.
- 6. Connect the mains supply wire to the terminal block (H).

Mains Supply Wire	Luminaire Wire / Terminal label
Earth – Yellow/Green 	Yellow/Green or 
Neutral – Blue or Black	Blue or N
Live – Brown or Red	Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

NOTE: This luminaire is rated IP65, this must be maintained during wiring and installation.

- 7. Ensure all wiring connections are secure and that no bare conductors are exposed.
- 8. Install a suitable globe (I – Not included) into the lamp holder (G). Do not exceed the maximum wattage rating


NOTE: Lucci SKU# 121735, 121736 globes are recommended.

- 9. Refit the protective shield (J) onto the base (D) and secure it using the four locking screws (K).
- 10. Reinstall the outer cover (L) onto the base (D) and secure it with the locking screw (C).
- 11. After the installation is complete, switch on the luminaire to test and enjoy your new lighting product.

Re-lamping Instructions

WARNING: Ensure power to the luminaire has been switched OFF and the luminaire is allowed to cool down before relamping.

- 1. Isolate power to the luminaire.
- 2. Loosen the locking screw (C) and remove the outer cover (L) from the base (D).
- 3. Remove the protective shield (J) by loosening and removing the four locking screws (K).
- 4. Carefully remove the existing globe (I) from the lamp holder (G).
- 5. Install a replacement globe (I) into the lamp holder (G).
- 6. Refit the protective shield (J) onto the base (D) and secure it using the four locking screws (K).
- 7. Reinstall the outer cover (L) onto the base (D) and secure it with the locking screw (C).
- 8. Restore power to the circuit and test the luminaire to confirm correct operation.

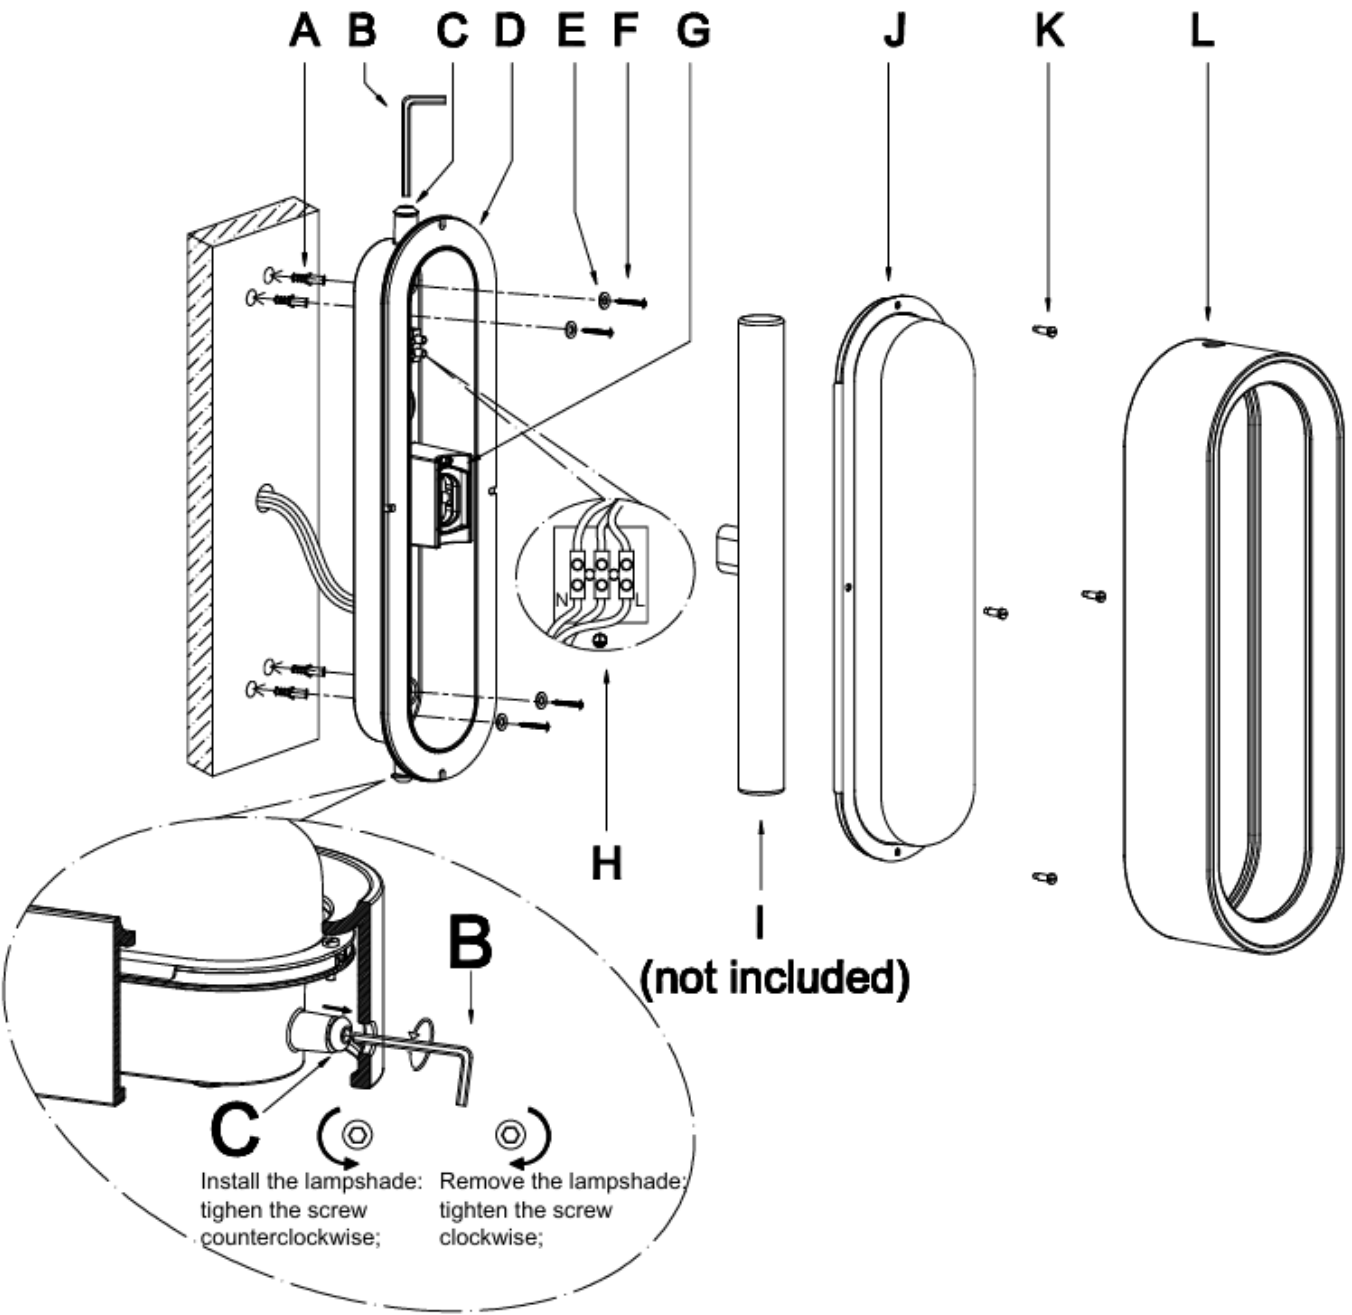

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or changing the lamp.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- If the diffuser is cracked or damaged. For your safety, discontinue use and replace the diffuser before using the luminaire again.

Specifications

SKU #	231380	231381	231382
Colour	Green	White	Black
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	20W Max. (LED lamp only)		
Protection Class	Class I		
Lamp Holder	S14d		
Recommended Globes	SKU# 121735 or SKU# 121736		
IP Rating	IP65		
Weight	2.8kg		
Dimensions	E:110mm W:120mm H:385mm		