

PEBBLE UP/DOWN WALL BRACKET

SKU# 231435, 231436, 231437

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP65. This must be maintained during installation.
- Replace any cracked protective lamp shade to maintain IP rating when using this luminaire.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is rated against water penetration to IP65 standards, which has protection against low-pressure jets of water from all practicable directions.
 - The mounting point must be able to support 2 times the weight of the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket from the luminaire by loosening the screws. Fig. 2
3. Disconnect the internal connectors between luminaire body and the terminal box. Fig. 2
4. Use the mounting bracket as a template to mark the screw positions on the wall. Fig. 2
5. Install the mounting bracket onto the wall by using appropriately sized mounting screws and anchors. Ensure the screws and anchors used are suitable for the mounting surface and the surrounding environment. Fig.2
6. Remove the globe shades from the luminaire by rotating anticlockwise. Fig. 2
7. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed Fig. 2

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green 

Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during the wiring and installation.


8. Reconnect the internal connectors between the luminaire body and the terminal box. Ensure they are fully inserted and securely engaged. Fig. 3

NOTE: A non-corrosive bead of silicone MUST be applied before installation onto the wall ensuring that no water can run down into the cabling.

9. Install the luminaire onto the mounting bracket and secure by tightening the screws. Fig. 3
10. Install globes (not included) into the lamp holders. Do not exceed the maximum wattage rating. Fig. 4
11. Refit the globe shades onto the luminaire by rotating clockwise until secure. Fig. 4
12. After the installation, switch on the luminaire to test and enjoy your new lighting product.

RELAMPING:

1. Switch OFF the power supply to the luminaire at the mains and allow sufficient time for the lamp and luminaire to cool before handling.
2. Remove the globe shades by rotating anticlockwise until released.
3. Carefully remove the existing globe from the lamp holder.
4. Install a new globe (not included) of the correct type and rating. Do not exceed the maximum wattage specified on the luminaire.
5. Refit the globe shades by rotating clockwise until securely fastened.
6. Restore power and switch on the luminaire to ensure proper operation.

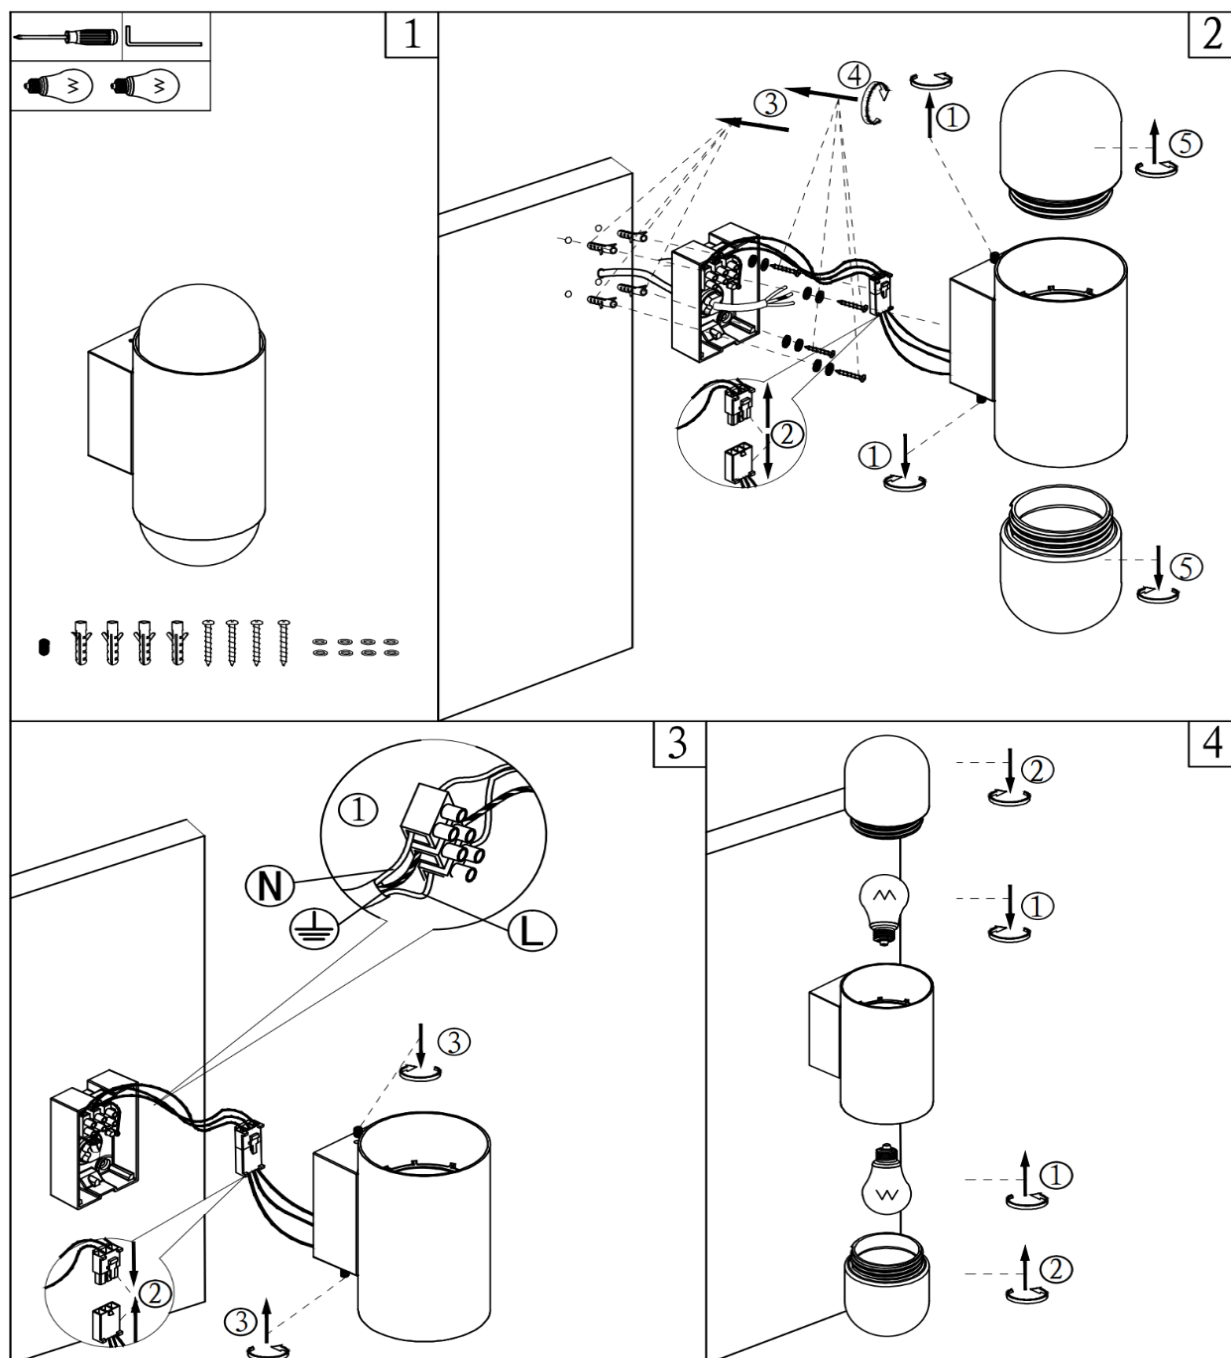

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- The luminaire must not be used if the protective shield has been cracked. Replace any cracked protective shield before using the luminaire.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.

Specifications

SKU #	231435	231436	231437
Colour	Black	Antique Brass	White
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	30W Max. (Use 2 x Max.15W globes, LED Only)		
Lamp Holder	ES / E27		
Weight	1.5kg		
IP Rating	IP65		
Dimensions	H:300mm W:105mm E:140mm		