

## BRIDGE UP/DOWN WALL SCNCE

SKU# 231440, 231441

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 5-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Installation requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP65, this must be maintained during wiring and installation.
- Select a suitable location for installation:
  - The mounting point must support 2 times the weight of the luminaire.
  - This luminaire is protected against water penetration to IP65 standards, which is against low pressure jets of water from all practicable direction. This must be maintained during installation.
- This luminaire must not be used if the protective shield has been cracked. Replace any cracked protective shield before using the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

### Installation directions

1. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.
2. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
3. Remove the lamp holder plate (F) from the mounting bracket (B) by loosening the screws (G).
4. Use the mounting bracket (B) as a template to mark the screw hole positions on the wall.
5. Drill the screw holes on the wall and install the mounting bracket (B) by using appropriately sized mounting screws (E), washers (D) and anchors (A). Ensure the screws and anchors used are suitable for the mounting surface and the surrounding environment.
6. Connect the mains supply wire to the terminal block(L). Ensure the wires are secure and no bare wires are exposed.

#### Mains Supply Wire

Earth – Yellow/Green   
 Neutral – Blue or Black  
 Live – Brown or Red

#### Luminaire Wire / Terminal Block


Yellow/Green   
 Blue or N  
 Brown or L

**NOTE: This luminaire is a Class I product and must be earthed during the wiring and installation.**

7. Insert the terminal pins (M) from the lamp holder plate (F) into the terminal block (L) on the mounting bracket (B).
8. Secure the lamp holder plate (F) back onto the mounting bracket (B) using screws (G).
9. Install the globes (I-not included) on the lamp holders (H). Do not exceed the maximum wattage rating.
10. Now install the lamp covers (J) onto the lamp holders (H).
11. Install the shade (K) by aligning the four screws on the shade with the keyhole slots on the mounting bracket(B), inserting the screw heads into the openings, and sliding the shade(K) to lock it in place.
12. Tighten the locking screws (C) on the mounting bracket (B) to fully secure the shade (K).
13. After full assembly and installation, switch on the luminaire to test and enjoy your new lighting product.

## RELAMPING

1. Ensure the power is turned OFF to the luminaire and allowed to cool down before relamping.
2. Remove Shade (K) by loosening the locking screw (C), then remove the lamp covers (J).
3. Remove the globe (I- not included) from lamp holder (H) by twisting it anticlockwise and replace with a new globe of the correct type and rating.
4. After installing the new globe, reinstall the lamp covers(J) and shade (K) onto the luminaire before turning the power ON.

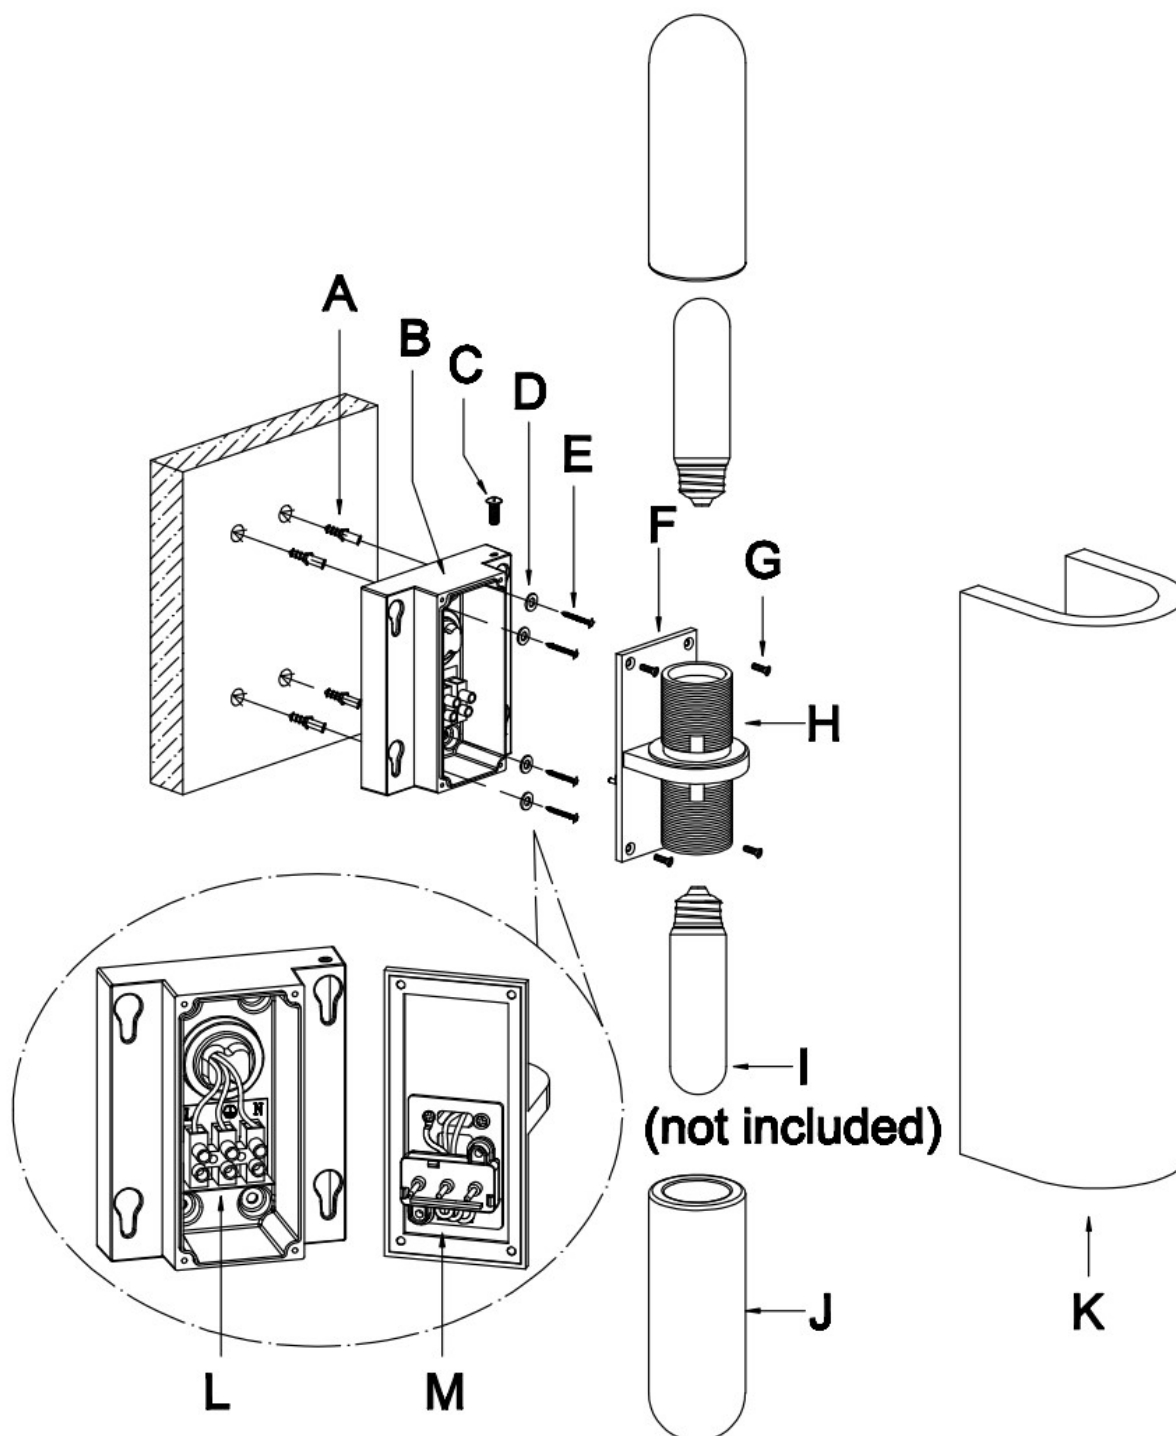

## Safety tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- The luminaire must not be used if the shade has been cracked. Replace any cracked protective shield before using the luminaire.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.

## Specifications

|                        |                                             |            |
|------------------------|---------------------------------------------|------------|
| SKU #                  | 231440                                      | 231441     |
| Colour                 | Natural Travertine                          | Lava Stone |
| Rated Voltage          | 220-240V~ 50Hz                              |            |
| Rated Wattage          | 20W Max. (Use 2 x Max.10W globes, LED Only) |            |
| Lamp Holder            | E27/ES                                      |            |
| Recommended Globe SKU# | 121955 (GE LED BRIGHT STIK)                 |            |
| IP Rating              | IP65                                        |            |
| Weight                 | 4.4 kg                                      |            |
| Dimensions             | H:340mm W:100mm E:135mm                     |            |