

CARLOTTA WALL LIGHT

SKU# 231446, 231447

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5 year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP65, this must be maintained during wiring and installation.
- Select a suitable location for installation:
 - The mounting point must support 2 times the weight of the luminaire.
 - This luminaire is protected against water penetration to IP65 standards, which is against low pressure jets of water from all practicable direction. This must be maintained during installation.
- This luminaire must not be used if the protective shield has been cracked. Replace any cracked protective shield before using the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation directions

1. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.
2. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
3. Use the mounting bracket (B) from the luminaire body as a template to mark the screw positions on the wall.
4. Install the mounting bracket (B) onto the wall by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
5. Remove the terminal cover (E) from the terminal block (F) by loosening the locking nut (D).
6. Connect the mains supply wire to the terminal block(F) . Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire/ Terminal Block

Yellow/Green or 

Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

NOTE: Ensure both the luminaire and mounting bracket earth wire is connected to the earth terminal block (F).

7. Now attach the terminal cover (E) back to terminal block (F) by tightening the locking nut (D).
8. Install the base cover (G) onto the mounting bracket(B) by rotating clockwise until secure.
9. Attach the lamp holder cover (H) onto the lamp holder by rotating clockwise.

NOTE: Ensure both base cover (G) and lamp holder cover (H) are properly installed to maintain IP65 rating.

10. Install a globe (I – Not included) into the lamp holder. Do not exceed the maximum wattage rating.
11. Now place the shade gasket (J) onto the mounting bracket(B) before installing the shade (K).


NOTE: Ensure the shade cover (J) is correctly positioned on the mounting bracket (B) to maintain IP65 rating.

12. Now install the shade (K) onto mounting bracket (B) by rotating clockwise until firmly secured.

13. After the full assembly and installation, switch on the luminaire to test and enjoy your new lighting product.

RELAMPING:

1. Switch OFF the power supply and allow the luminaire to cool down completely before replacing the globe.
2. Remove the shade (K) by rotating it anticlockwise.
3. Carefully remove the shade cover (J) (if applicable).
4. Remove the existing globe from the lamp holder and install a new globe (I- not included). Do not exceed the maximum wattage specified on the luminaire.
5. Refit the shade cover (J), ensuring it is correctly positioned to maintain the IP65 rating.
6. Reinstall the shade (K) by rotating it clockwise until securely tightened.

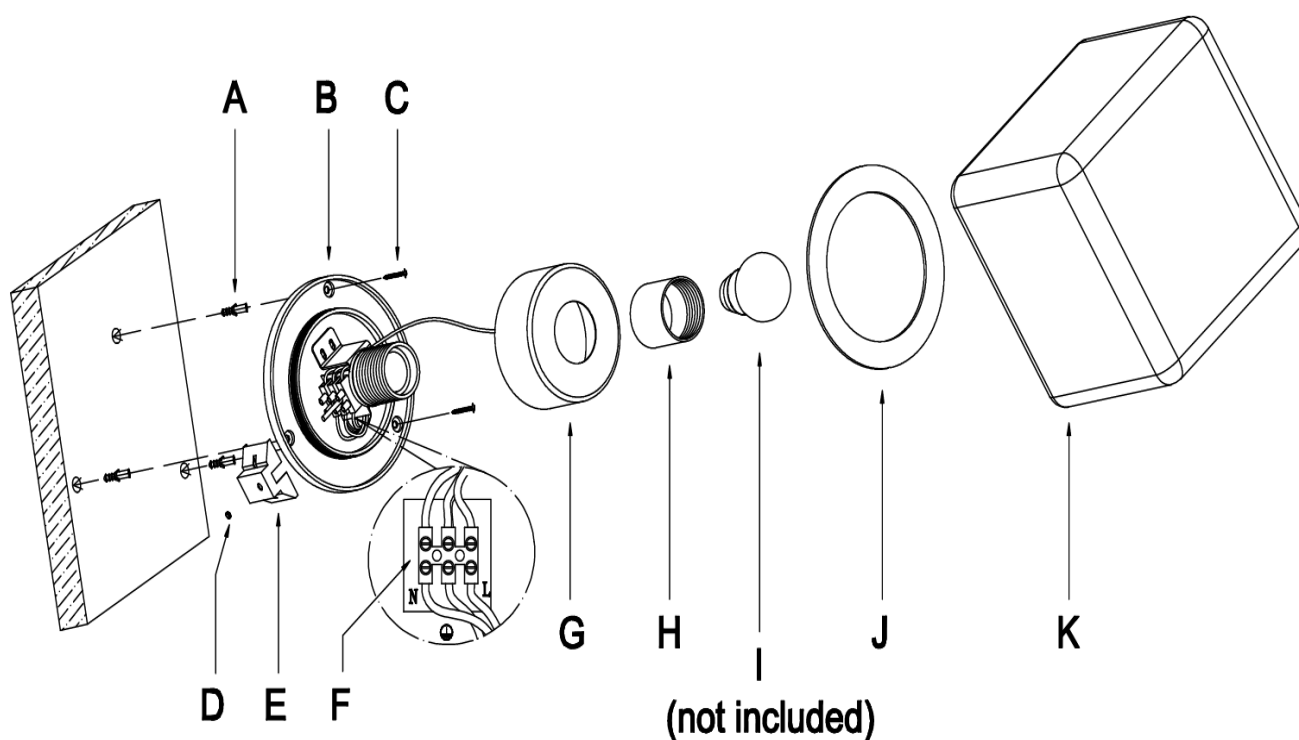

Safety tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- The luminaire must not be used if the shade has been cracked. Replace any cracked protective shield before using the luminaire.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.

Specifications

SKU #	231446	231447
Colour	OPAL	SEPIA
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	15W Max. (LED Only)	
Lamp Holder	E27/ES	
IP Rating	IP65	
Weight	1.9kg	
Dimensions	H:180mm W:180mm E:195mm	