

FLINDERS LED DISC

SKU# 231460, 231461, 231462

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation, and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5 year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- This luminaire is not suitable for use with dimmer switches.
- Warranty will be void if the luminaire is used on the same circuit which has a dimmer switch.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g., AS/NZS 3000 Electrical installations.
- This luminaire is a Class II product and must be maintained during wiring and installation.
- This luminaire is rated IP65, this must be maintained during wiring and installation
- Select a suitable location for installation:
 - The mounting point must be able to support 2 times the weight of the luminaire.
 - This luminaire is protected against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions.
- The luminaire must not be used if the protective shield has cracked. Replace any cracked protective shield before using the luminaire.
- This luminaire is not suitable for dimming and should not be used with a circuit which has a dimmer. Warranty will be void if the luminaire is used on the same circuit which has a dimmer switch.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
- 2. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work. (Fig.1)
- 3. Remove the decorative ring from the luminaire. (Fig. 2)
- 4. Remove the luminaire base from the luminaire body by loosening the screws on the sides. (Fig. 3)
- 5. Use the luminaire base as a template to mark the screw positions on the wall.
- 6. Install the luminaire base onto the wall by using appropriately sized mounting screws and anchors. Ensure the screws and anchors used are suitable for the mounting surface and the surrounding environment. (Fig. 4)

NOTE: A non-corrosive bead of silicon MUST be applied before installation onto the wall, ensuring that no water can run down into the cabling.

- 7. Install the decorative ring back onto the luminaire. (Fig. 4)
- 8. The colour temperature of this luminaire is to be set to your desired colour temperature at the time of installation. Use the toggle switch in the luminaire to select your desired colour temperature (“WW” for 3000K Warm White, “CW” for 4000K Cool White, or “DL” for 5000K Daylight.). (Fig. 4)

NOTE: Using the toggle switch requires removal of mounting bracket cover and must only be carried out by a licensed electrician.









NOTE: The toggle switch must only be operated when power to the luminaire has been switched off. Changing toggle switch settings while the luminaire is powered may cause damage to the luminaire.

- 9. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed. (Fig. 5)

Mains Supply Wire	Luminaire Wire / Terminal label
Neutral – Blue or Black	Blue or N
Live – Brown or Red	Brown or L

NOTE: This is a Class II luminaire and must be maintained during wiring and installation.

- 10. Install the luminaire body back onto the luminaire base and secure by tightening the screws on the side. (Fig. 6)
- 11. Attach the disc onto the luminaire by rotating clockwise until secure. (Fig.7)
- 12. After the installation, switch on the luminaire to test all the lighting functions and enjoy your new luminaire. (Fig.8)

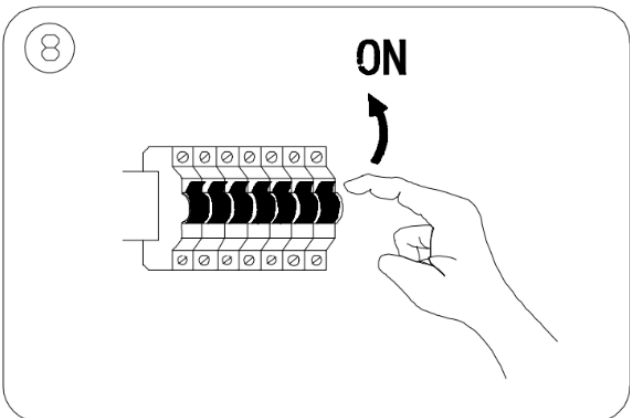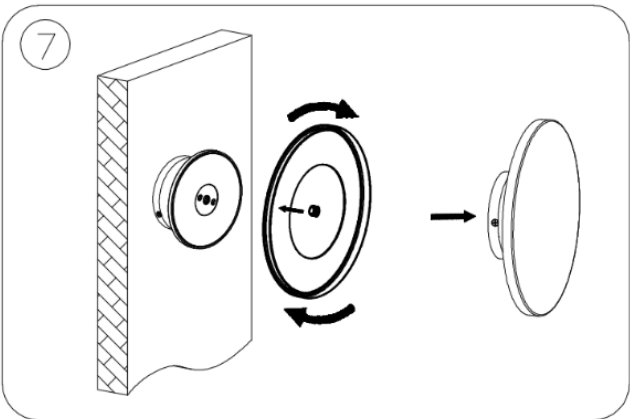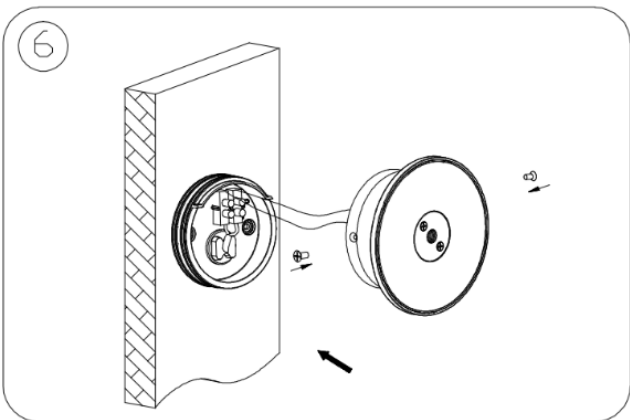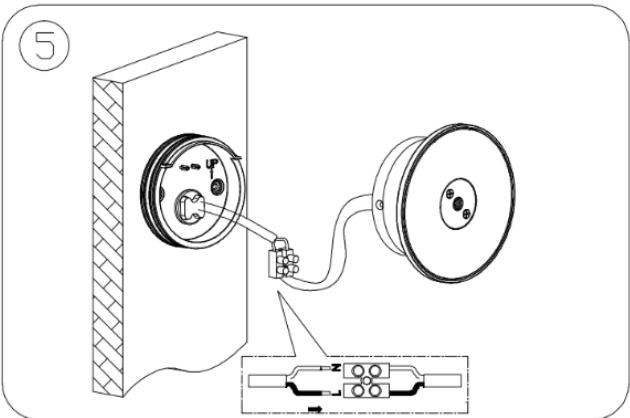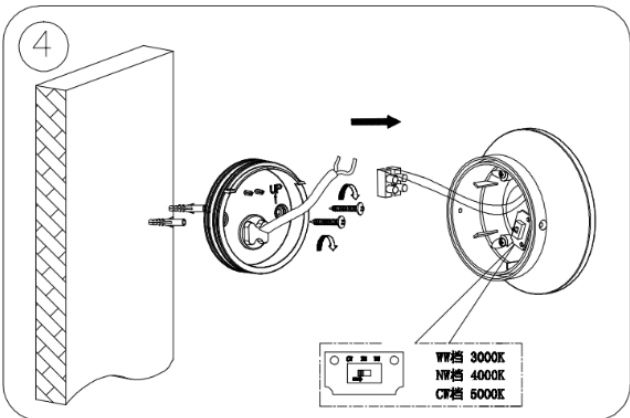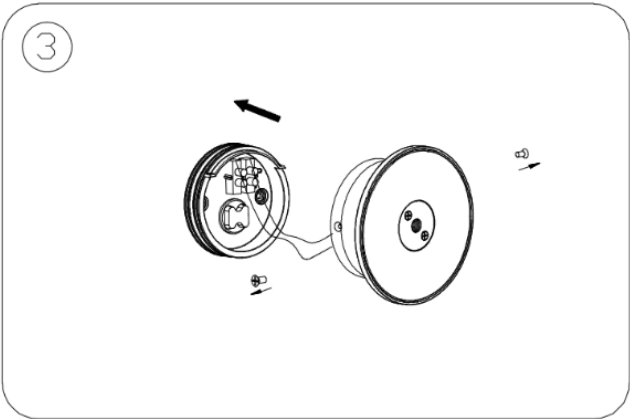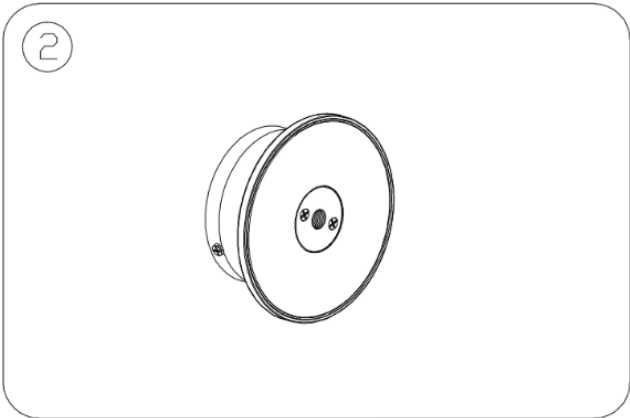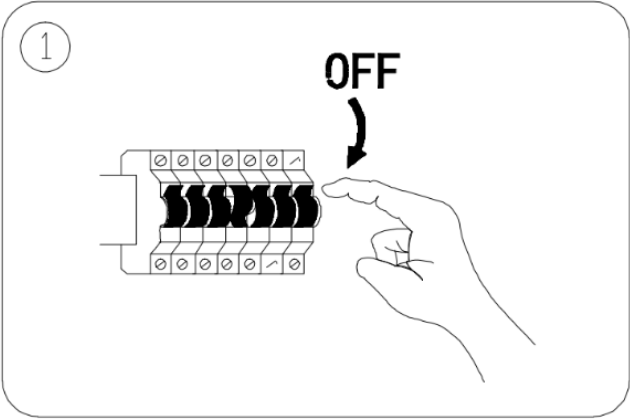

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The luminaire must not be used if the protective shield has cracked. Replace any cracked protective shield before using the luminaire again.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the luminaire

Specifications

SKU #	231460	231461	231462
Colour/Finish	White	Black	Green
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	9W		
Class	II		
LED Specs	650 lumens max, 3000K-4000K-5000K CCT, CRI>80, Non-dimmable		
IP Rating	IP65		
Weight	1.0kg		
Dimensions	H:60mm Dia:225mm		