

SYNC WALL SCNCE

SKU# 231472,231473,231474,231475

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.


Warranty

- This luminaire is covered by a 5-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- This luminaire is not suitable for use with dimmer switches. The warranty will be void if the luminaire is used on the same circuit, which has a dimmer switch.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
E.g. AS/NZS 3000 Electrical installations.
- This luminaire is a Class II product and must be maintained during wiring and installation.
- Select a suitable location for installation:
 - The mounting point must be able to support 2 times the weight of the luminaire.
 - This luminaire is protected against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions. This must be maintained during wiring and installation.
- The luminaire is not suitable to use with dimmer switches and must not be used with a circuit which has a dimmer.
- The luminaire must not be used if the protective shield has cracked. Replace the protective shield before using the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

NOTE:



This symbol indicates the presence of 240V AC mains voltage. Contact with live parts can result in electric shock. Installation, servicing, and wiring must only be carried out by a licensed electrician. Disconnect power before working on the product.

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing the installation (Fig. 1).

- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
- 2. Remove the shade from mounting bracket and remove mounting bracket cover by loosening the screws as shown in (Fig.3)
- 3. Use the mounting bracket as a template to mark the screw positions on the wall.
- 4. Install the mounting bracket onto the wall by using appropriately sized mounting screws, waterproof gaskets and anchors. Ensure the mounting screws and anchors used are suitable for the mounting surface and the surrounding environment. (Fig. 4)
- 5. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed. (Fig. 5)

Mains Supply Wire	Luminaire Wire / Terminal label
Neutral – Blue or Black	Blue or N
Live – Brown or Red	Brown or L

NOTE: Ensure the wires are secure and no bare wires are exposed.









NOTE: The luminaire is a Class II product and must be maintained during wiring and installation.

- 6. The colour temperature of this luminaire is to be set to your desired colour temperature at the time of installation. Use the toggle switch in the luminaire to select your desired colour temperature (“WW” for 3000K Warm White, “CW” for 4000K Cool White, or “DL” for 5000K Daylight.). (Fig. 5)

NOTE: Using the toggle switch requires removal of mounting bracket cover and must only be carried out by a licensed electrician.

NOTE: The toggle switch must only be operated when power to the luminaire has been switched off. Changing toggle switch settings while the luminaire is powered may cause damage to the luminaire.

- 7. Install the mounting bracket cover onto the mounting bracket and secure it by tightening the screws. (Fig. 5)
 - 8. Now install the shade onto the mounting bracket. (Fig. 6,7)
- NOTE:** This luminaire contains 240V operating LED module. The shade must be fully installed and secured before switching the power ON. Operating luminaire without shade installed may expose live parts and can result in electric shock.
- 9. After the installation is complete, switch on the luminaire to test and enjoy your new lighting product (Fig. 8).

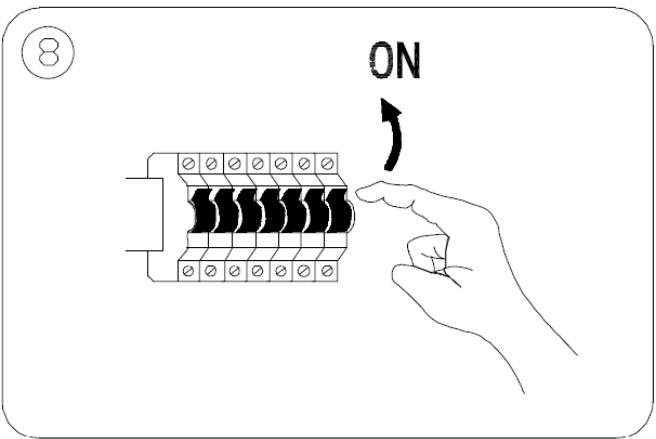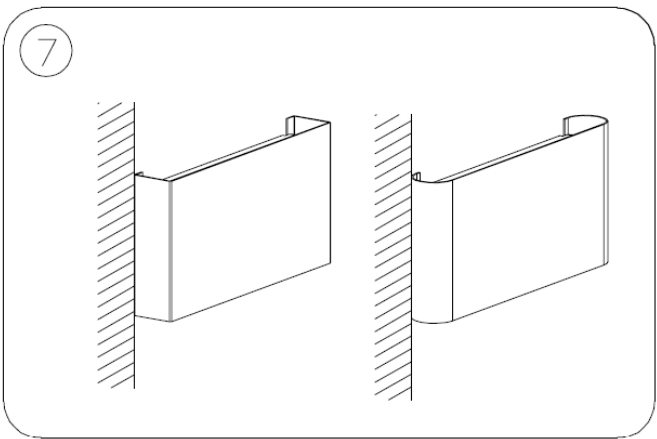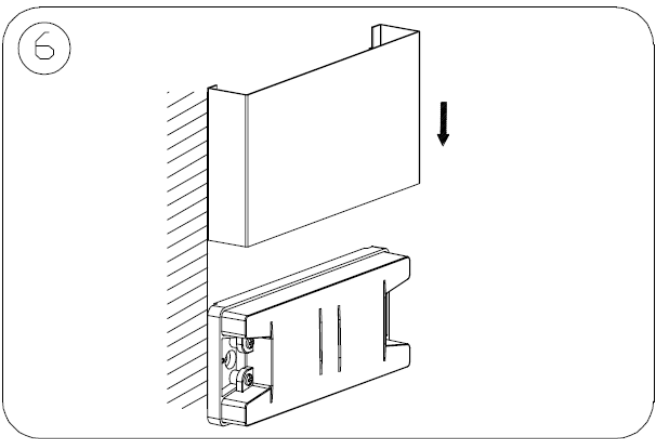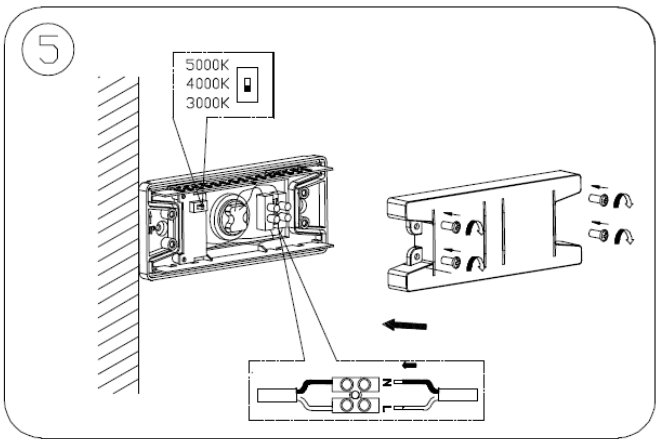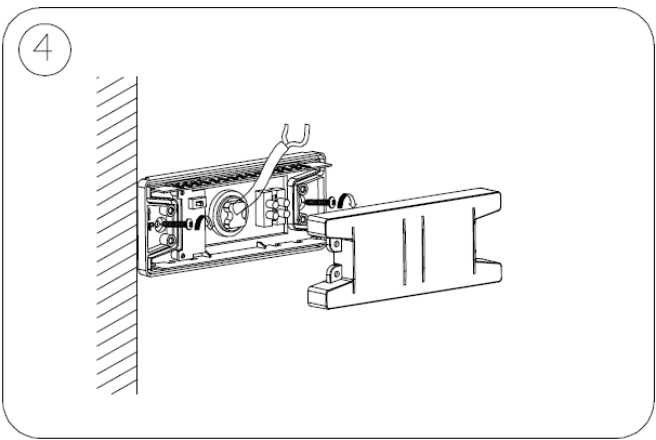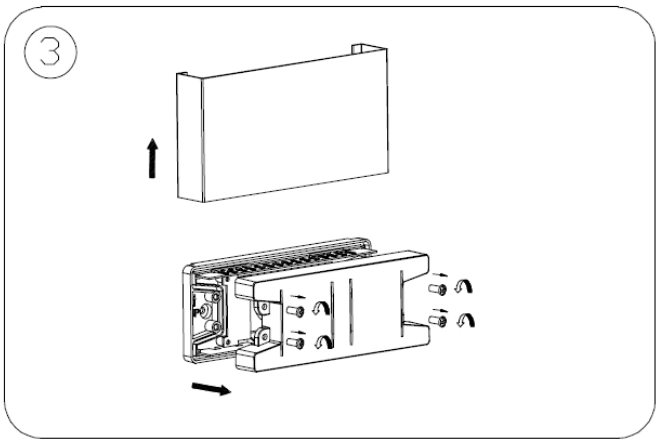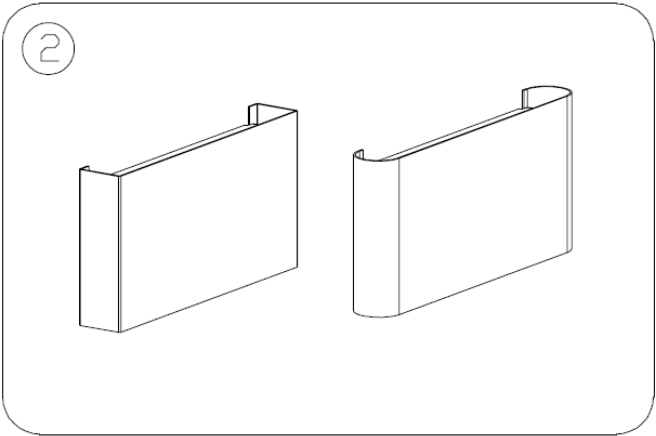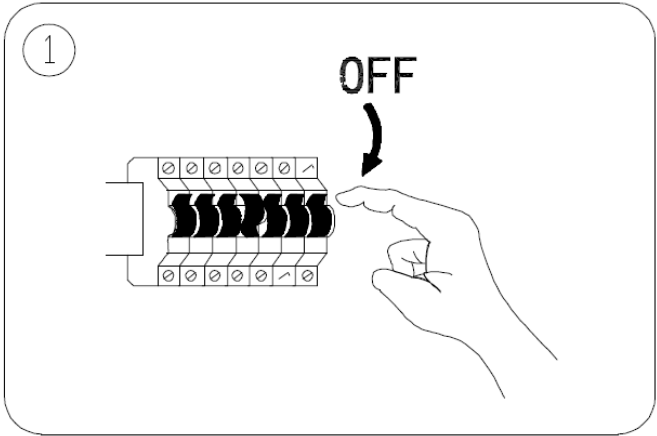

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The luminaire must not be used if the protective shield has cracked. Replace the protective shield before using the luminaire.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the luminaire.

Specifications

SKU #	231472	231473	231474	231475
Colour/Finish	Black/square edge	White/square edge	Black/round edge	White/round edge
Weight	0.25kg			
Dimensions	H:90mm W:175mm E:30mm		H:90mm W:190mm E:30mm	
Rated Voltage	220-240V~ 50Hz			
Class	II			
Rated Wattage	6W			
LED Specs	500 lumens max, Colour Shifting* (3000K-4000K-5000K) LEDs, Flicker Free			
IP Rating	IP65			