

JESSY 2 LIGHT UP/DOWN WALL BRACKET

SKU# 300627, 300628.

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for use in indoor environments only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.

- 1. Remove the luminaire from the mounting bracket by loosening the grub screw at the bottom.
- 2. Use the mounting bracket as a template to mark the screw hole positions on the wall.
- 3. Depending on the mounting surface, determine if any anchors or mounting accessories is required for installation. Ensure the anchors or mounting accessories are suitable for the mounting surface and the surrounding environment.
- 4. Install the mounting bracket onto the wall by using appropriately sized mounting screws. Ensure the screws used are suitable for the mounting surface and the surrounding environment.
- 5. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed

Mains Supply Wire

- Earth – Yellow/Green
- Neutral – Blue
- Live – Brown

Luminaire Wire/Terminal Block


- Yellow/Green or 
- Blue or N
- Brown or L

NOTE: This luminaire is a Class I product and must be earthed during the wiring and installation.

- 6. Install the luminaire back onto the mounting bracket.
- 7. Secure the luminaire by tightening the grub screw at the bottom of the luminaire.
- 8. Slide the luminaire shade down.
- 9. Install a globe (not included) into the top lamp holder. Do not exceed the maximum wattage rating.
- 10. Slide the luminaire shade up.
- 11. Install a globe (not included) into the bottom lamp holder. Do not exceed the maximum wattage rating.
- 12. Slide the luminaire shade to the centre position.

RELAMPING

- 1. Ensure the power is turned OFF to the luminaire and allowed to cool down before re-lamping.
- 2. Slide the luminaire shade up or down to access the old lamp.
- 3. Remove the old lamp from the lamp holder by twisting it anticlockwise.
- 4. Insert the new lamp into the lamp holder and rotate it clockwise until firmly seated.

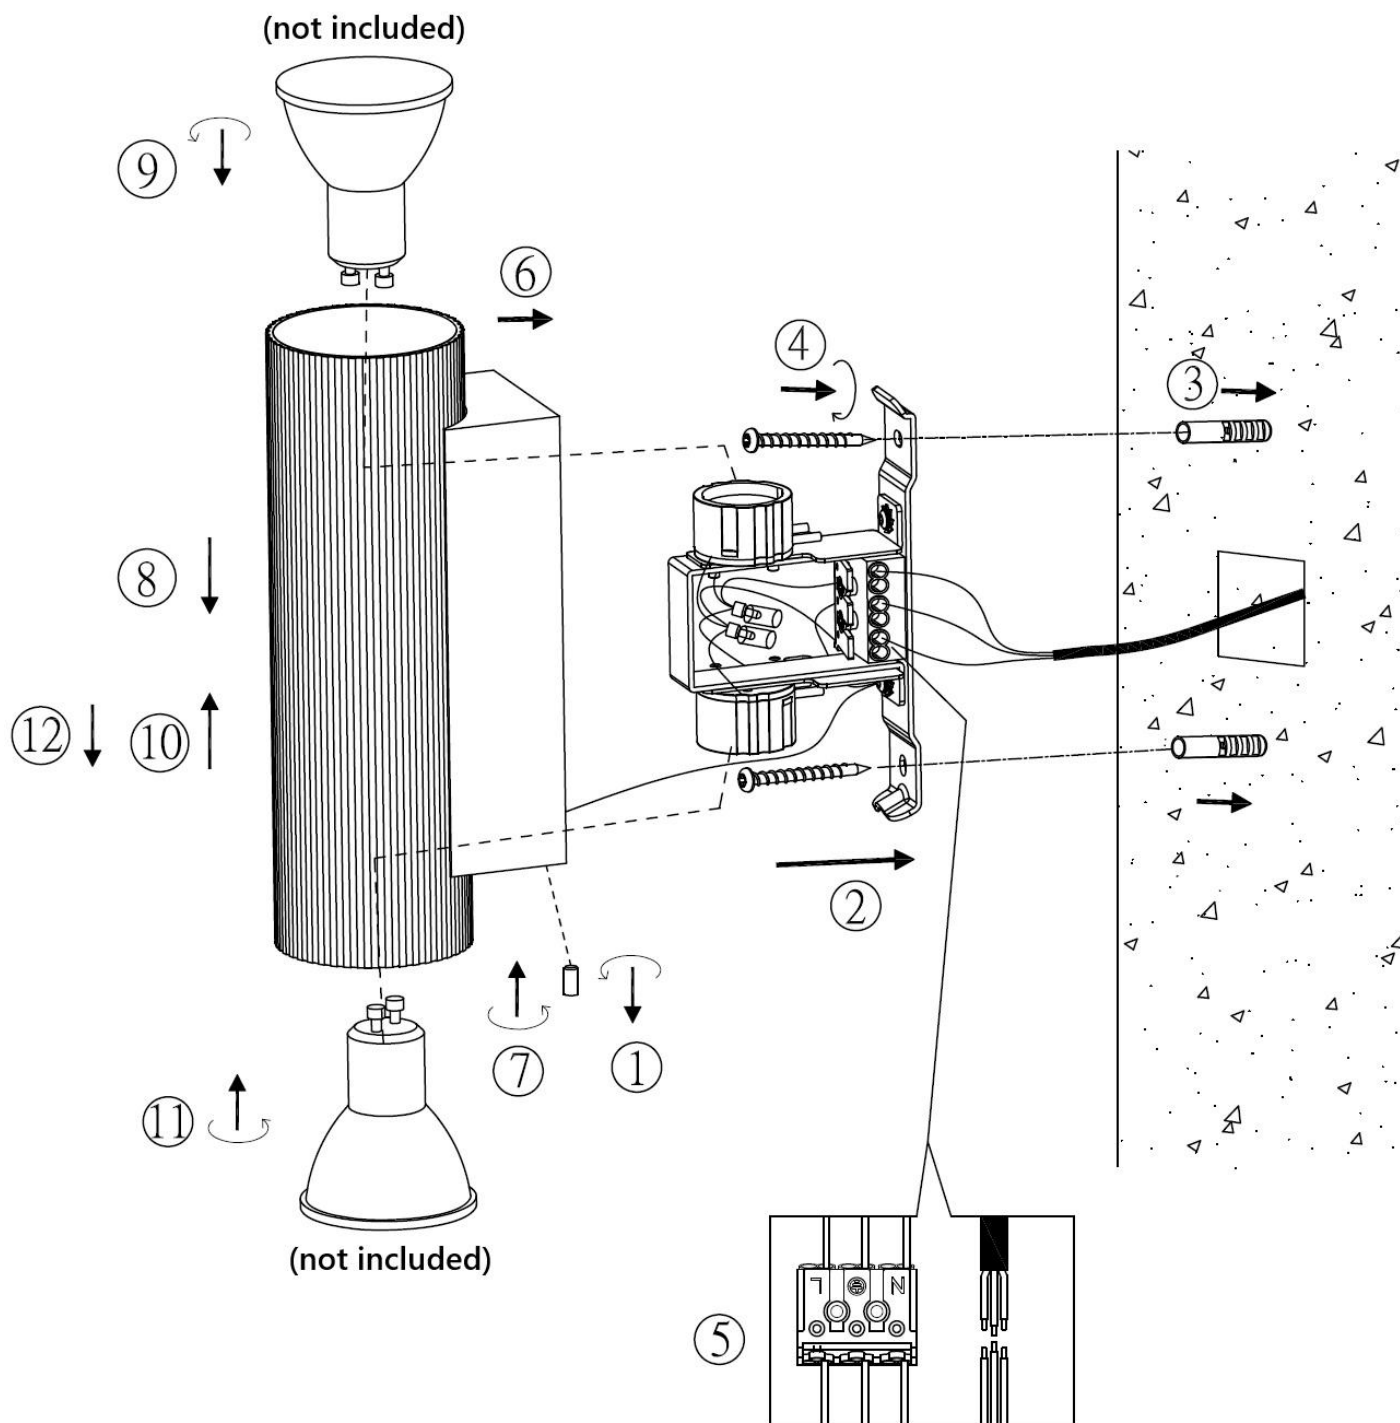

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications		
SKU #	300627	300628
Colour	Black	White
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	20W Max. (2x Max. 10W)	
Lamp Holder	GU10	
Protection Class	Class I	
Weight	0.4kg	
Dimensions	H:180mm W:56mm E:77mm	