

REVE WALL SCONCE

SKU# 300925, 300926

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - When installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the luminaire on its side on a smooth non scratch surface.
- 2. Remove the mounting bracket (C) from luminaire body (H) by loosening the screws (D) and decorative nuts (L).
- 3. Use the mounting bracket (C) as a template to mark the screw positions on the wall.
- 4. Install the mounting bracket (C) onto the wall by using appropriately sized mounting screws (G) and anchors (B). Ensure the screws (G) and anchors (B) used are suitable for the mounting surface and the surrounding environment.
- 5. Connect the mains supply wire and luminaire wires(F) together to the terminal blocks. Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

- Earth – Yellow/Green 
- Neutral – Blue or Black
- Live – Brown or Red


Luminaire Wire/ Terminal Block

- Yellow/Green or 
- Blue or N
- Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

NOTE: Ensure both the luminaire and mounting bracket earth wire is connected to the earth terminal block (A).

- 6. Install the luminaire body (H) onto the mounting bracket (C) by aligning the screws (D) on the bracket into the screw holes of the luminaire body (H) and secure by using decorative nuts (L).
- 7. Install a globe (E – Not included) into the lamp holder (K). Do not exceed the maximum wattage rating.
- 8. Install the shade (M) onto the top of the luminaire body (H) by hooking it over the tabs at the top, then securing it by tightening the decorative screw (J) and washer (I) through the hole at the base of the shade (M) and into the base of the luminaire body (H).
- 9. After the full assembly and installation, switch on the luminaire to test and enjoy your new lighting product.

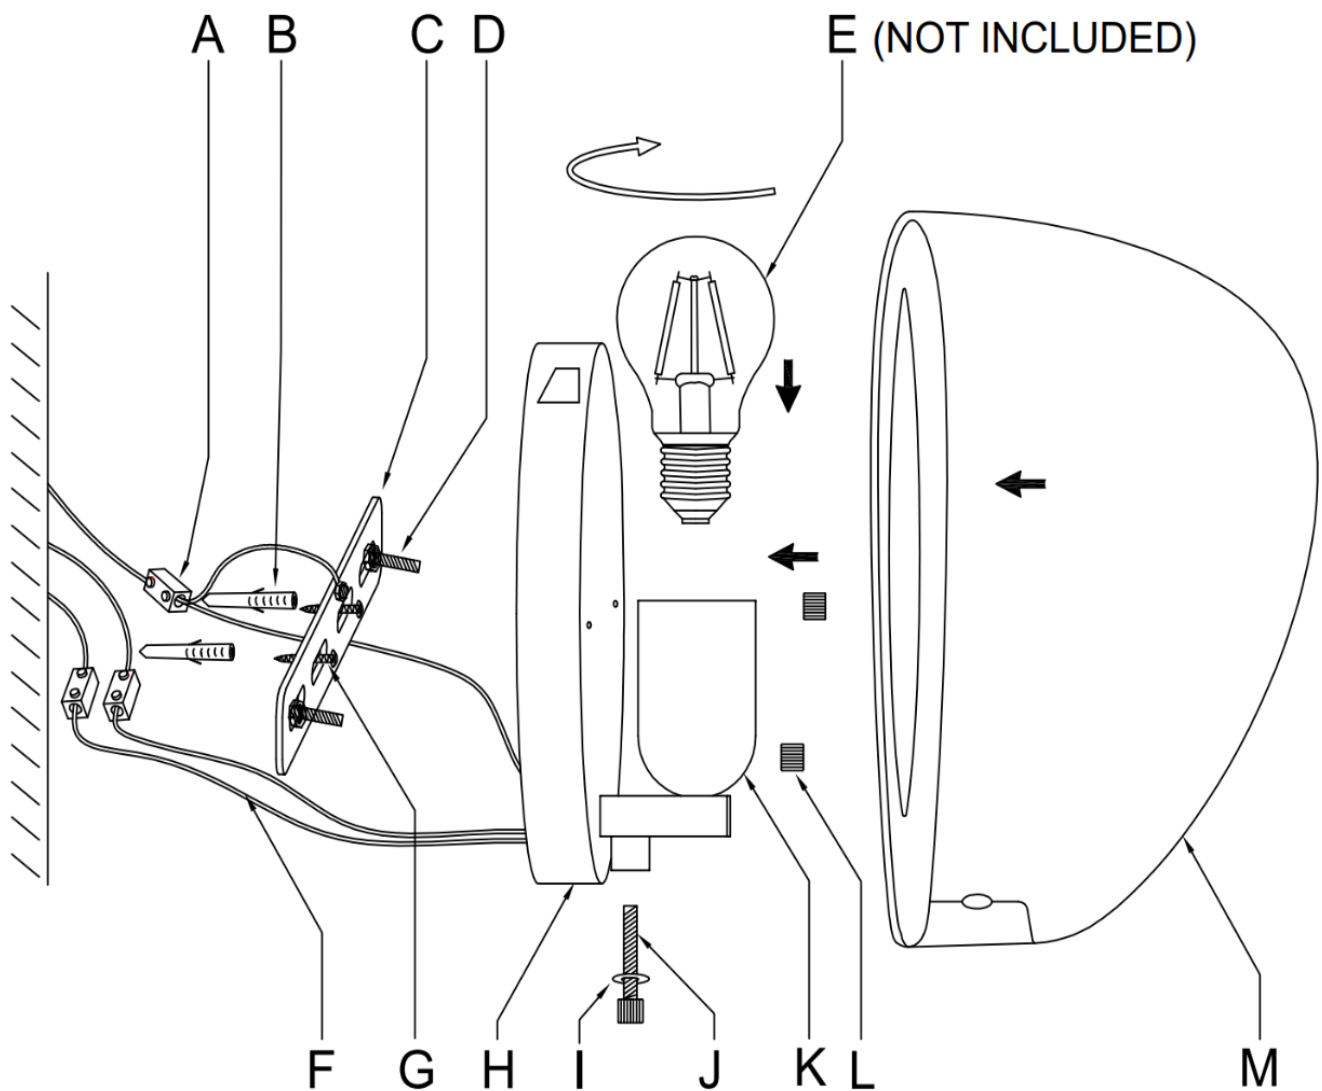

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury, or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals, etc.
- To clean/wipe with a damp clean cloth. Never soak the luminaire with water.

Specifications		
SKU #	300925	300926
Colour	OPAL GLASS	MILK GLASS
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	28W Max.	
Lamp Holder	ES / E27	
Weight	1 KGS	
Back Plate Dimensions	H:20mm Dia:160mm	
Luminaire Dimensions	W:255mm	H:215mm E:135mm