

## CAMPARI 1 LIGHT SMALL WALL BRACKET

SKU# 309210, 309211, 309212, 309213, 309214

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from the date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.  
E.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This luminaire is suitable for use in indoor environments only.
  - The mounting point must support 2 times the weight of the luminaire.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

## Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket (B) from the luminaire (E) by loosening the screws (F) on the sides.
3. Use the mounting bracket (B) as a template to mark the screw positions on the wall.
4. Install the mounting bracket (B) onto the wall by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
5. Connect the mains supply wire to the terminal block (D). Ensure the wires are secure, and no bare wires are exposed.

### Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

### Luminaire Wire / Terminal block

Yellow/Green or 

Blue or N

Brown or L

**NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.**

6. Install the luminaire (E) back onto the mounting bracket (B) and secure it by tightening the screws (F) on the sides.
7. Install the marble finial (G) on the luminaire head (H).
8. Install a globe (I - not included) into the lamp holder. Do not exceed the maximum wattage rating.
9. Adjust the luminaire arm to you desired angle.

**NOTE: Do not adjust the arm more than 120°, as this may damage the joint or the internal wiring.**


10. Adjust the luminaire head up and down to you desired angle.

**NOTE: Do not adjust the head up and down more than 78°, as this may damage the joint or the internal wiring.**

11. Adjust the luminaire head side to side to you desired angle.

**NOTE: Do not adjust the head side to side more than 320°, as this may damage the joint or the internal wiring.**

12. After the installation, switch on the luminaire to test and enjoy your new lighting product.

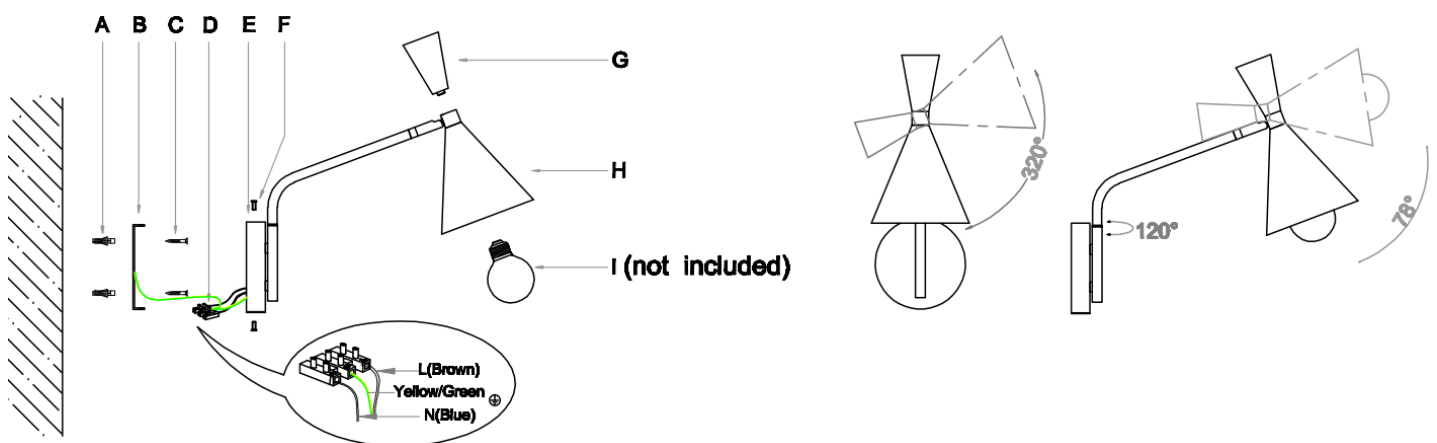

**NOTES FOR ARM AND HEAD ADJUSTMENT:** To avoid and damage to the joints or internal wiring, please do not adjust the arm or head beyond the angles listed:

- Maximum adjustment of the arm: no more than 120°
- Maximum rotation angle of the head: no more than 320° side to side.
- Maximum tilt angle of the head: no more than 78° up and down.

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

## Specifications

| SKU #                | 309210                                                   | 309211                                    | 309212                                        | 309213                                                    | 309214                                                 |
|----------------------|----------------------------------------------------------|-------------------------------------------|-----------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------|
| Colour               | Black /<br>Green Marble /<br>Bronze Finish               | White /<br>White Marble /<br>Brass Finish | Beige /<br>Natural Travertine /<br>Aged Brass | Brushed Nickel /<br>Silver Travertine /<br>Textured Black | Brushed Copper /<br>Rose Travertine /<br>Antique Brass |
| Rated Voltage        | 220-240V~ 50Hz                                           |                                           |                                               |                                                           |                                                        |
| Rated Wattage        | 28W Max.                                                 |                                           |                                               |                                                           |                                                        |
| Lamp Holder          | ES / E27                                                 |                                           |                                               |                                                           |                                                        |
| Weight               | 0.8kg                                                    |                                           |                                               |                                                           |                                                        |
| Luminaire Dimensions | H:335mm W:130mm E:370mm Max: < H:335mm W:380mm E:390mm > |                                           |                                               |                                                           |                                                        |