

FORM 1 LIGHT PENDANT

SKU# 011573, 011574, 011577, 011578, 011579.

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from the date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for use in indoor environments only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing the luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by environmental exposure (including salt air, high humidity, moisture or condensation) is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing, or have been damaged during transport, before assembling. Do not operate/install any product which appears damaged in any way. If parts are missing or damaged, return the complete product to the place of purchase for inspection, repair or replacement.

Installation Directions

- Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
- Determine the suspension length required for your installation location. If the length of the suspension cord, requires adjustment, loosen the cord anchorage inside the canopy and adjust the length of the suspension cord. Tighten the cord anchorage, take care not to overtighten and damage the cord.

FIGURE A

1. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

FIGURE B

1. Remove the mounting bracket from the canopy by loosening the screws on the sides.
2. Use the mounting bracket as a template to mark the screw hole positions on the ceiling.
3. Pull the mains supply wire down from the ceiling and through the mounting bracket hole.
4. Depending on the mounting surface, determine if anchors or mounting accessories are required for installation. If they are required, ensure they are suitable for the mounting surface and the surrounding environment. Install the mounting bracket onto the ceiling by using appropriately sized mounting screws. Ensure the mounting screws used are suitable for the mounting surface and the surrounding environment.
5. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire	Luminaire Wire / Terminal block
Earth – Yellow/Green	Yellow/Green or 
Neutral – Blue or Black	Blue or N
Live – Brown or Red	Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.


6. Install the canopy back onto the mounting bracket.
7. Secure the canopy by tightening the screws on the sides.
8. Remove the lamp holder cover from the lamp holder by twisting to the left.
9. Install the shade on to the lamp holder
10. Install the lamp holder cover back onto the lamp holder by twisting to the right.
11. Install a lamp (not included) into the lamp holder. Do not exceed the maximum wattage rating.

FIGURE C

1. Check the installation is complete and the lamp has been installed into the lamp holder.
Switch the power back ON to the circuit you have been working on.
Switch on the luminaire to test and enjoy your new lighting product.

RELAMPING

1. Ensure the power is turned OFF to the luminaire and the lamp is fully cooled down before relamping.
2. Hold the top of the luminaire body and suspension cord to prevent it from rotating or twisting.
3. Remove the old lamp by twisting it anti-clockwise and install a new lamp by twisting it clockwise until it is secure.

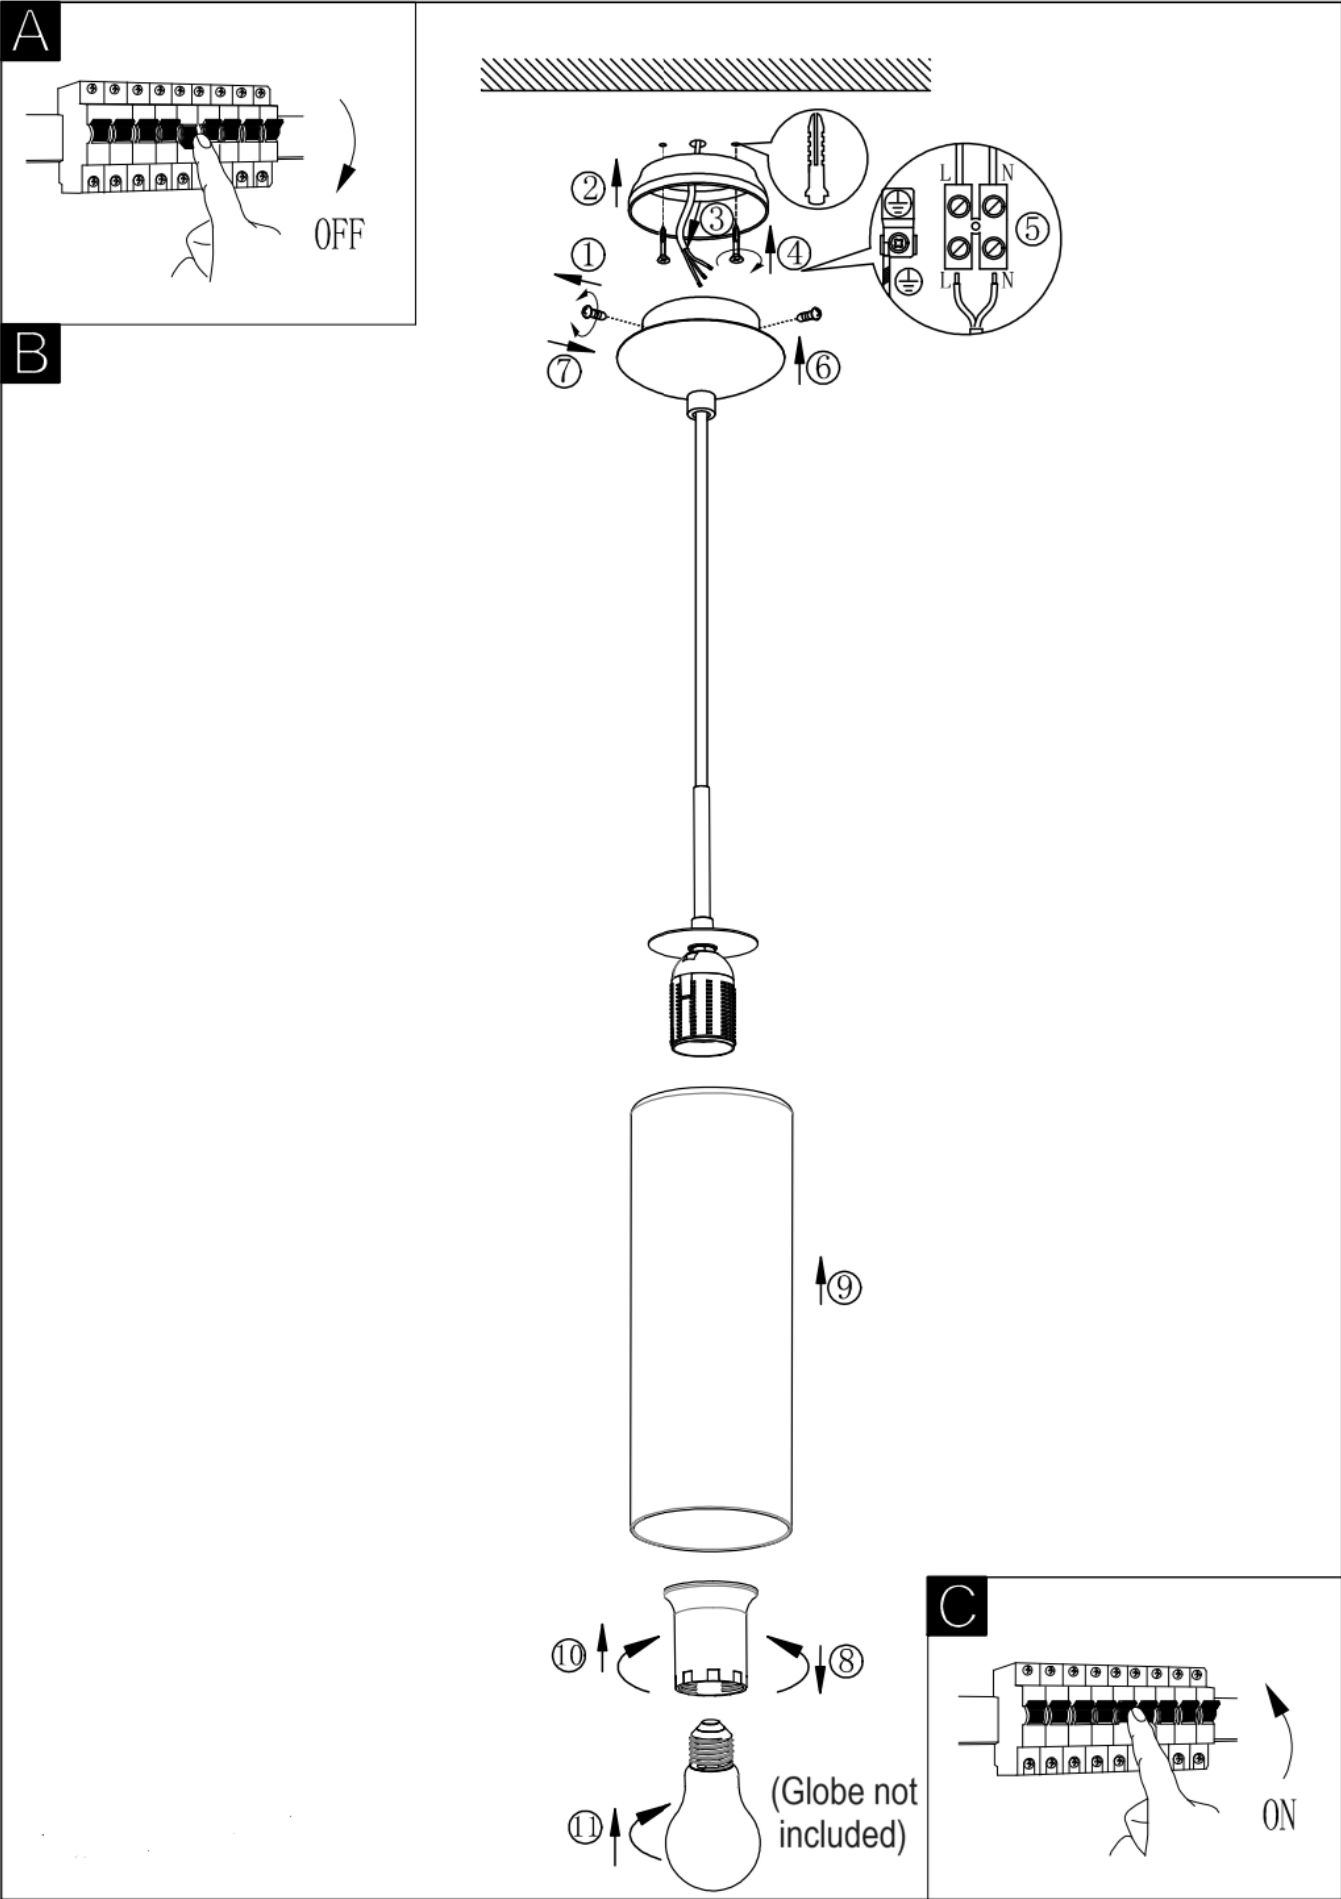

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamp or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	011573	011574	011577	011578	011579
Article No.	206327	206325	208088	208089	208091
Colour	Black	White	Brushed Chrome	Bronze Finish	Copper Finish
Shade	Smoke Glass (SKU# P010055)	Opal Glass (SKU# P010056)	Clear Glass (SKU# P010060)	Sepia Glass (SKU# P010061)	Rose Glass (SKU# P010062)
Protection Class	Class I				
Rated Voltage	220-240V~ 50Hz				
Rated Wattage	Max. 28W				
Lamp Holder	ES / E27				
Weight	0.8kg				
Canopy Dimensions	H:35mm Dia:110mm				
Luminaire Dimensions	H:366mm Dia:100mm Susp:2000mm				