

## PISTON DIY SURFACE MOUNT

SKU# 090408, 090409

DIY (Installation onto existing batten holder)

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This is a DIY (do it yourself) product. No electrical wiring connection or disconnection is required. The service of a licensed electrician is not required.
- This product is designed to be used with a batten holder (not included).  
The installation location must have an existing batten holder (not included) pre-installed.  
If you do not have a batten holder (not included), please contact a licensed electrician for installation.
- Ensure the existing batten holder is in good working condition, and the plastic has not become cracked, brittle or discoloured.
- This product is suitable for indoor use only.
- Do not exceed the maximum globe wattage rating after the installation of this DIY product.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling.  
If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

### Installation Directions

**NOTE: Ensure power to the batten holder you are working on has been switched OFF before commencing the installation.**


1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.

**NOTE: Do not exceed the 9W maximum globe rating after the installation of this DIY product.**

2. Remove the skirt (D – not included) from the existing batten holder (A – not included).
3. Install the luminaire (B) onto the batten holder (A – not included) and secure using the skirt (D – not included).

**NOTE: Ensure that the skirt (D – not included) is attached securely. Check that it has taken up at least 2-3 full threads while attaching the skirt (D – not included) to the batten holder (A – not included).**

4. Install the bayonet adapter (C) into the batten holder (A – not included).
5. Install the shade (E) onto the luminaire (B).
6. Install a GX53 globe (G - not included) into the GX53 lamp holder (F)
7. Check and ensure the product is fully assembled and all parts are secure before turning on the power to the batten holder. Switch the power ON to test and enjoy your new lighting product.

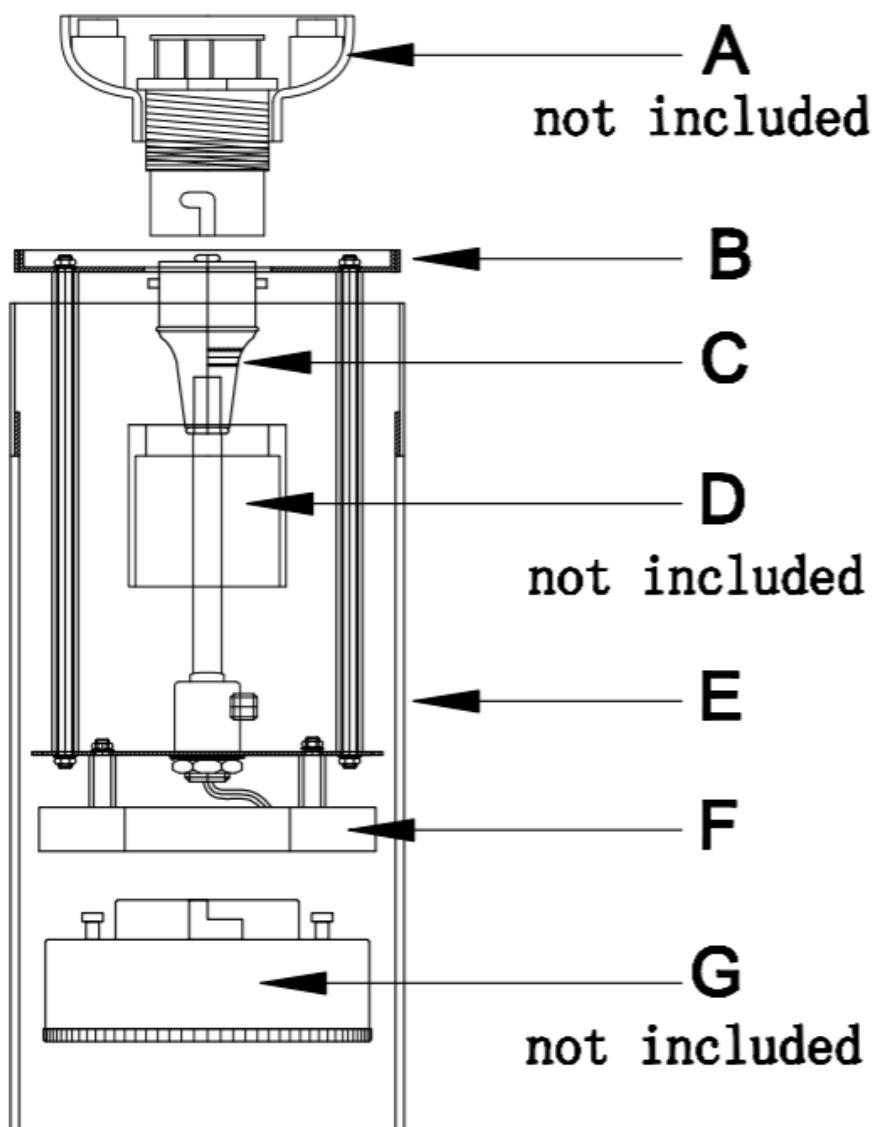

## Globe Replacement

**NOTE: Ensure power to the batten holder you are working on has been switched OFF before commencing the installation.**

1. Remove the GX53 globe by gently twisting it anticlockwise until it unlocks from the holder.
2. Insert the new GX53 globe into the holder.
3. Switch the luminaire back on and check that it operates correctly.

## Safety Tips

- Always ensure the power is OFF and the product has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment.
- Handle the product and shade with care to avoid any damage or breakage.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the product does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

## Specifications

|                  |                                                                |        |
|------------------|----------------------------------------------------------------|--------|
| SKU #            | 090408                                                         | 090409 |
| Colour           | White                                                          | Black  |
| Globe Wattage    | 9W Max. (After the installation of this DIY product)           |        |
| Compatible Globe | 121986                                                         |        |
| Lamp Holder      | GX53 - Installation onto existing batten holder (not included) |        |
| Weight           | 0.4kg                                                          |        |
| Dimensions       | H:190mm Dia:90mm                                               |        |