

FOCUS 1M GU10 TRACK KIT

SKU# 140105, 140106

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

NOTE: This product is a track kit and consists of the following items:

SKU #	140105	140106
Colour	Textured White	Textured Black
Contents of Track Kit	Track: 1x SKU# 149053 Track Spot: 3x SKU# 140107 GU10 LED Lamps: 3x SKU# 121511	Track: 1x SKU# 149052 Track Spot: 3x SKU# 140108 GU10 LED Lamps: 3x SKU# 121511

Warranty

- This product is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the product is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the product.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This product must be assembled and installed by a licensed electrician.
- All wiring and installation of the product must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical Installations.
- The product is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum rated current.
- Select a suitable location for installation:
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the track system and any attached luminaires.
 - The maximum mechanical loading for the track system, inclusive of the weight of luminaires and accessories is 5kg. Do not exceed this weight.
 - The track system is unsuitable for the connection of inductive loads.
 - It is the user's responsibility to ensure electrical, mechanical and thermal compatibility between the track system and luminaires attached to it.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the product has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the product on a smooth non-scratch surface.
2. Remove the live end component from the track.
3. Use the track as a template to mark the screw hole positions on the mounting surface.
4. Drill the installation holes onto the mounting surface.
5. Install the track onto the mounting surface by using appropriately sized mounting screws and anchors. Ensure the screws and anchors used are suitable for the mounting surface and the surrounding environment.
6. Decide on the cord entry method into the live end component. The mains supply wire can enter from the side (Fig. A) or from the back of the live end component (Fig. B).
7. Remove the cover from the live end component and connect the mains supply wire to the live end component.

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

Terminal Markings

⏏ - Earth



N - Neutral

L - Live

NOTE: This product is a Class I product and must be earthed during wiring and installation.

8. Ensure the wires are secure and no bare wires are exposed. Install the cover back onto the live end component.
9. Insert the live end component into the track. (Fig. C)
10. Ensure the live end component and the track are secure (Fig. D)
11. Tighten the screw at the live end component. (Fig. E)


NOTE: Ensure the screw has a tight connection to the track to create a secure and reliable earthing point.

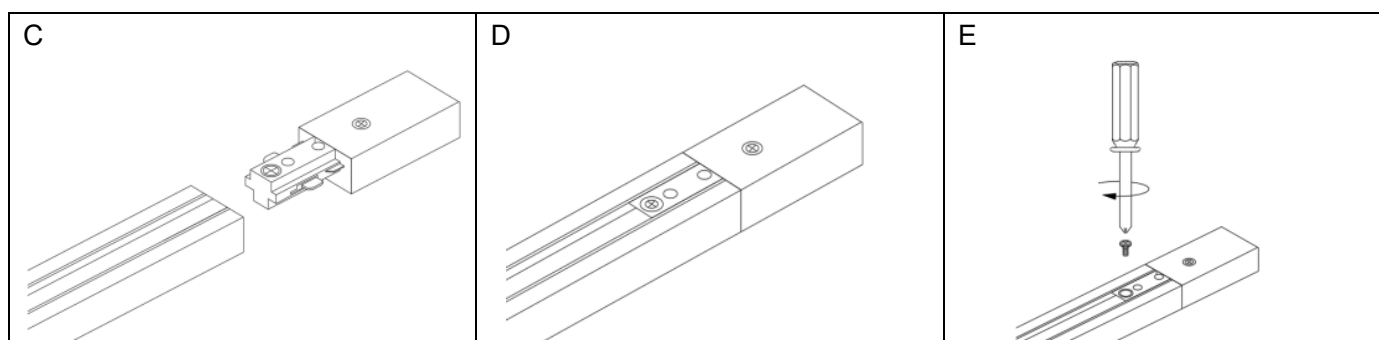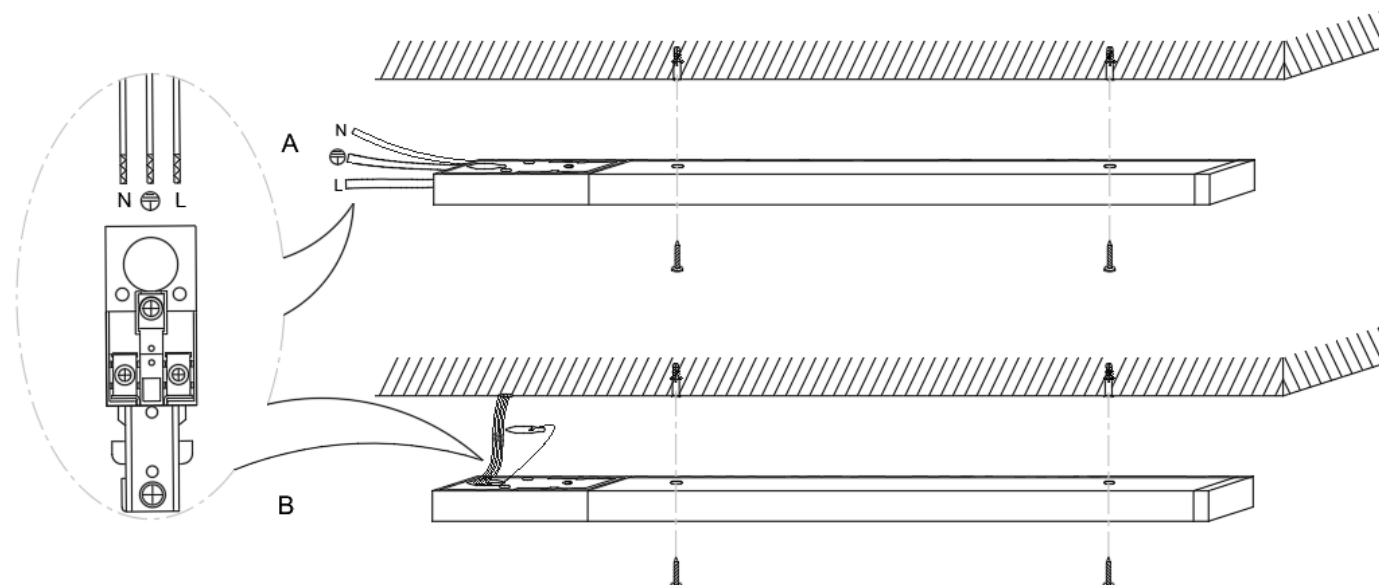

12. Twist the shade anti-clockwise to remove it from the luminaire. (Fig. F)
13. Install a LED GU10 lamp (included) into the lamp holder. Do not exceed the maximum wattage rating. (Fig. G)
14. Install the shade back onto the luminaire and secure the shade by twisting it in a clockwise direction. (Fig. H)
15. Look at the track adaptor and locate the side with the earth pin or the groove on the housing.

Look at the Lucci track and locate the side which has the groove.

Align the groove on the track adaptor with the groove on the Lucci track to ensure the luminaire is inserted in the correct direction. (refer to the picture below)

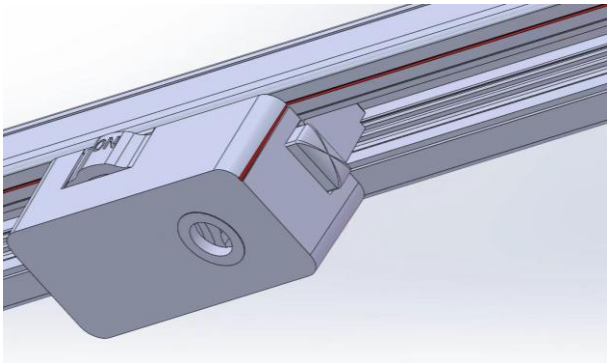


16. Check and ensure the lock on the track adaptor is in the "OFF" position. (Fig. I)
17. Push and hold down on the locking clip on the track adaptor. (Fig. J)
18. Insert the track adaptor into the Lucci track and secure it by rotating the lock on the track adaptor to the "ON" position. (Fig. J)
19. Hold onto the track adaptor and adjust the luminaire head to your desired angle. (Fig. K)

NOTE: DO NOT adjust the head up or down more than 90° & DO NOT rotate the head more than 350°.

As this may damage the knuckle joint and the internal wires. (Fig. K)

20. After the installation, switch on the luminaire to test and enjoy your new lighting product.

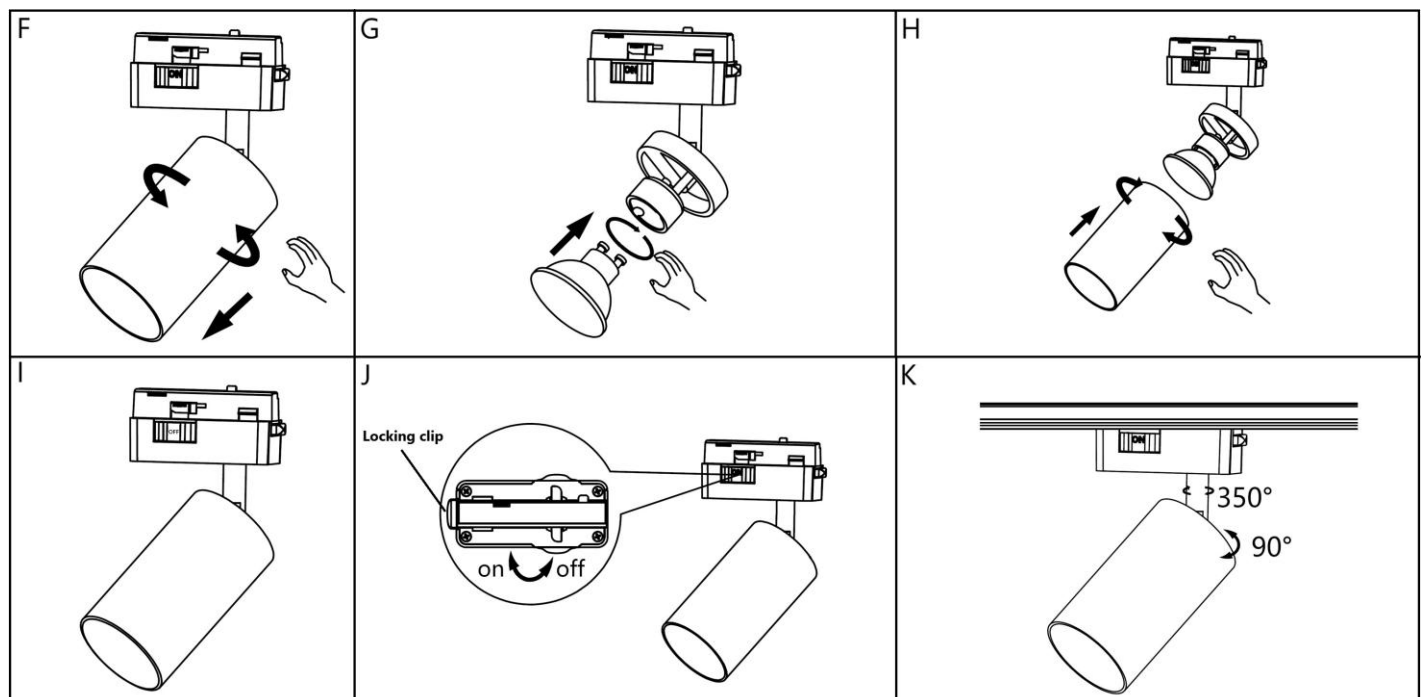

RELAMPING

1. Ensure the power is turned OFF to the luminaire and allowed to cool down.
2. Repeat steps 12-14 above to replace with a new lamp.

Safety Tips

- Always ensure the power is OFF and the product has cooled down before performing any maintenance, cleaning or changing the lamp.
- To avoid injury or damage to the product, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the product does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	140105	140106
Colour	Textured White	Textured Black
Contents of Track Kit	Track: 1x SKU# 149053 Track Spot: 3x SKU# 140107 GU10 LED Lamps: 3x SKU# 121511	Track: 1x SKU# 149052 Track Spot: 3x SKU# 140108 GU10 LED Lamps: 3x SKU# 121511
Rated Voltage	220-240V~ 50Hz	
Track Rated Current	16A	
Luminaire Rated Wattage	4W Max.	
Protection Class	Class I	
Weight	1.1kg	
Dimensions	H:165mm L:1000mm W:120mm	