

COLETTE 3 LIGHT PENDANT

SKU# 031085,031086

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - When installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

NOTE: This luminaire can be installed with or without the lamp shade, please refer to:

Luminaire with shade – See installation directions (page 2) and diagram (page 3).

Luminaire without shade – See installation directions (page 4) and diagram (page 5).

Installation Directions for Luminaire with Shade (refer to diagram on page 3)

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the luminaire on its side on a smooth non scratch surface.
- 2. Decide on the suspension length of your pendant by installing the different sections of suspension rods (K, L, M, N) onto the luminaire body (P). Feed the cord (O) through as you assemble to remove any slack.

NOTE: Take care not to cross-thread the suspension rods or twist and damage the cord during assembly. Pull the cord (O) through suspension rods (K, L, M, N) as you assemble and relieve any twist in the cord (O) by turning it anticlockwise.

- 3. Pull the cord (O) from the luminaire body (P) up into the canopy (F) and attach the canopy's pivot joint (G) to the top of the suspension rod assembly. Excess cord (O) can be pulled into the canopy (F) and secured using the plastic cable anchorage (D).
- 4. Use mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
- 5. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
- 6. Use the luminaire ring (E) to hang the luminaire up onto the hook of mounting bracket (B).
- 7. Connect the mains supply wire, luminaire wire and earth cable (I) to the terminal block (H). Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

- Earth – Yellow/Green 
- Neutral – Blue or Black
- Live – Brown or Red


Luminaire Wire/ Terminal Block

- Yellow/Green or 
- Blue or N
- Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation

- 8. Slide up and install the canopy (F) over the hook mounting bracket (B) and secure by tightening the screw (J).
- 9. Install the lamp shades (S) onto the lamp holder assembly (U) and secure by tightening the lamp holder rings (R) onto the lamp holder assembly (U).
- 10. Install a globe (Q – Not included) into the lamp holder (T). Do not exceed the maximum wattage rating.
- 11. After the full assembly and installation, switch on the luminaire to test and enjoy your new lighting product.

Installation Diagram for Luminaire with Shade (refer to Installation Directions on page 2)

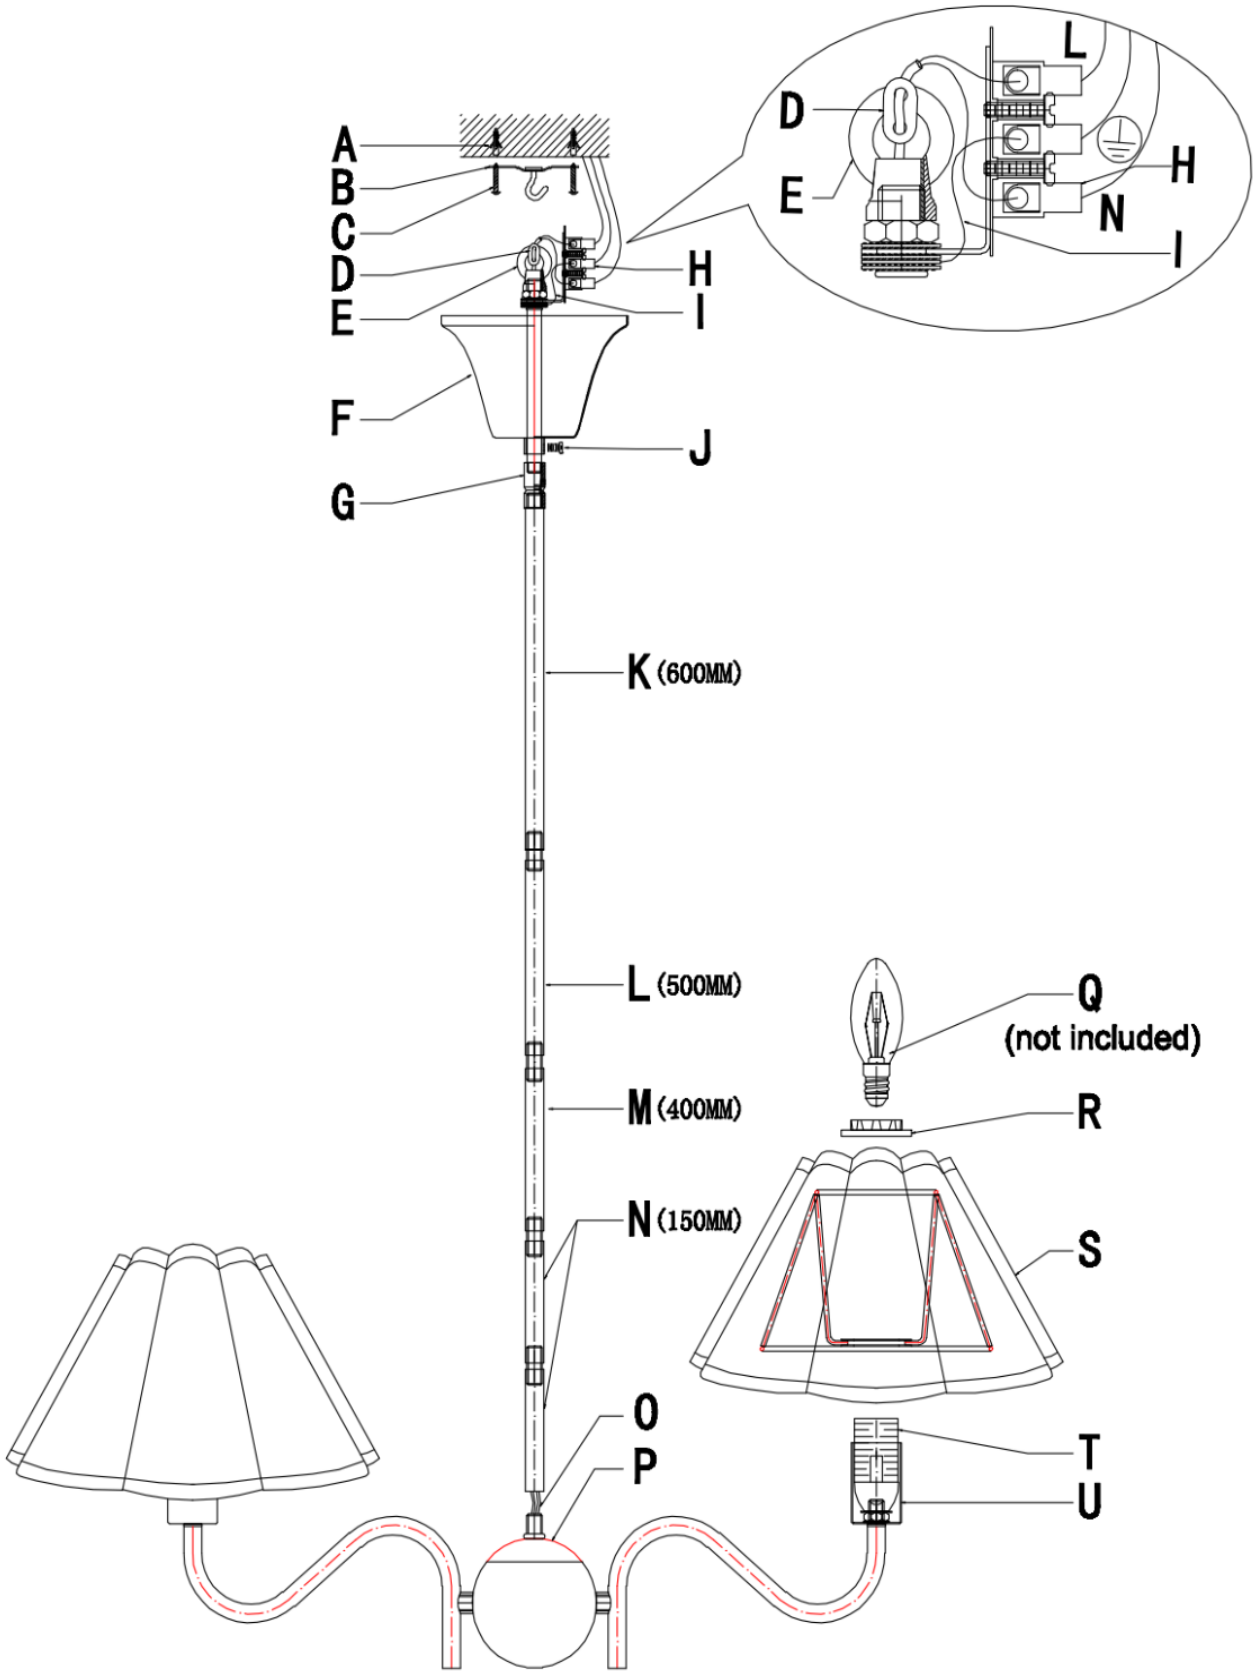

Installation Directions for Luminaire without Shade (refer to diagram on page 5)

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the luminaire on its side on a smooth non scratch surface.
- 2. Decide on the suspension length of your pendant by installing the different sections of suspension rods (K, L, M, N) onto the luminaire body (P). Feed the cord (O) through as you assemble to remove any slack.

NOTE: Take care not to cross-thread the suspension rods or twist and damage the cord during assembly. Pull the cord (O) through suspension rods (K, L, M, N) as you assemble and relieve any twist in the cord (O) by turning it anticlockwise.

- 3. Pull the cord (O) from the luminaire body (P) up into the canopy (F) and attach the canopy's pivot joint (G) to the top of the suspension rod. Excess cord (O) can be pulled into the canopy (F) and secured using the plastic cable anchorage (D).
- 4. Use mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
- 5. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
- 6. Use the luminaire ring (E) to hang the luminaire up onto the hook of mounting bracket (B).
- 7. Connect the mains supply wire, luminaire wire and earth cable (I) to the terminal block (H). Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

- Earth – Yellow/Green 
- Neutral – Blue or Black
- Live – Brown or Red


Luminaire Wire/ Terminal Block

- Yellow/Green or 
- Blue or N
- Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation

- 8. Slide up and install the canopy (F) over the hook mounting bracket (B) and secure by tightening the screw (J).
- 9. Install the decorative rings (V) onto the lamp holders (M).
- 10. Install a globe (Q – Not included) into the lamp holder (T). Do not exceed the maximum wattage rating.
- 11. After the full assembly and installation, switch on the luminaire to test and enjoy your new lighting product.

Installation Diagram for Luminaire without Shade (refer to Installation Directions on page 4)

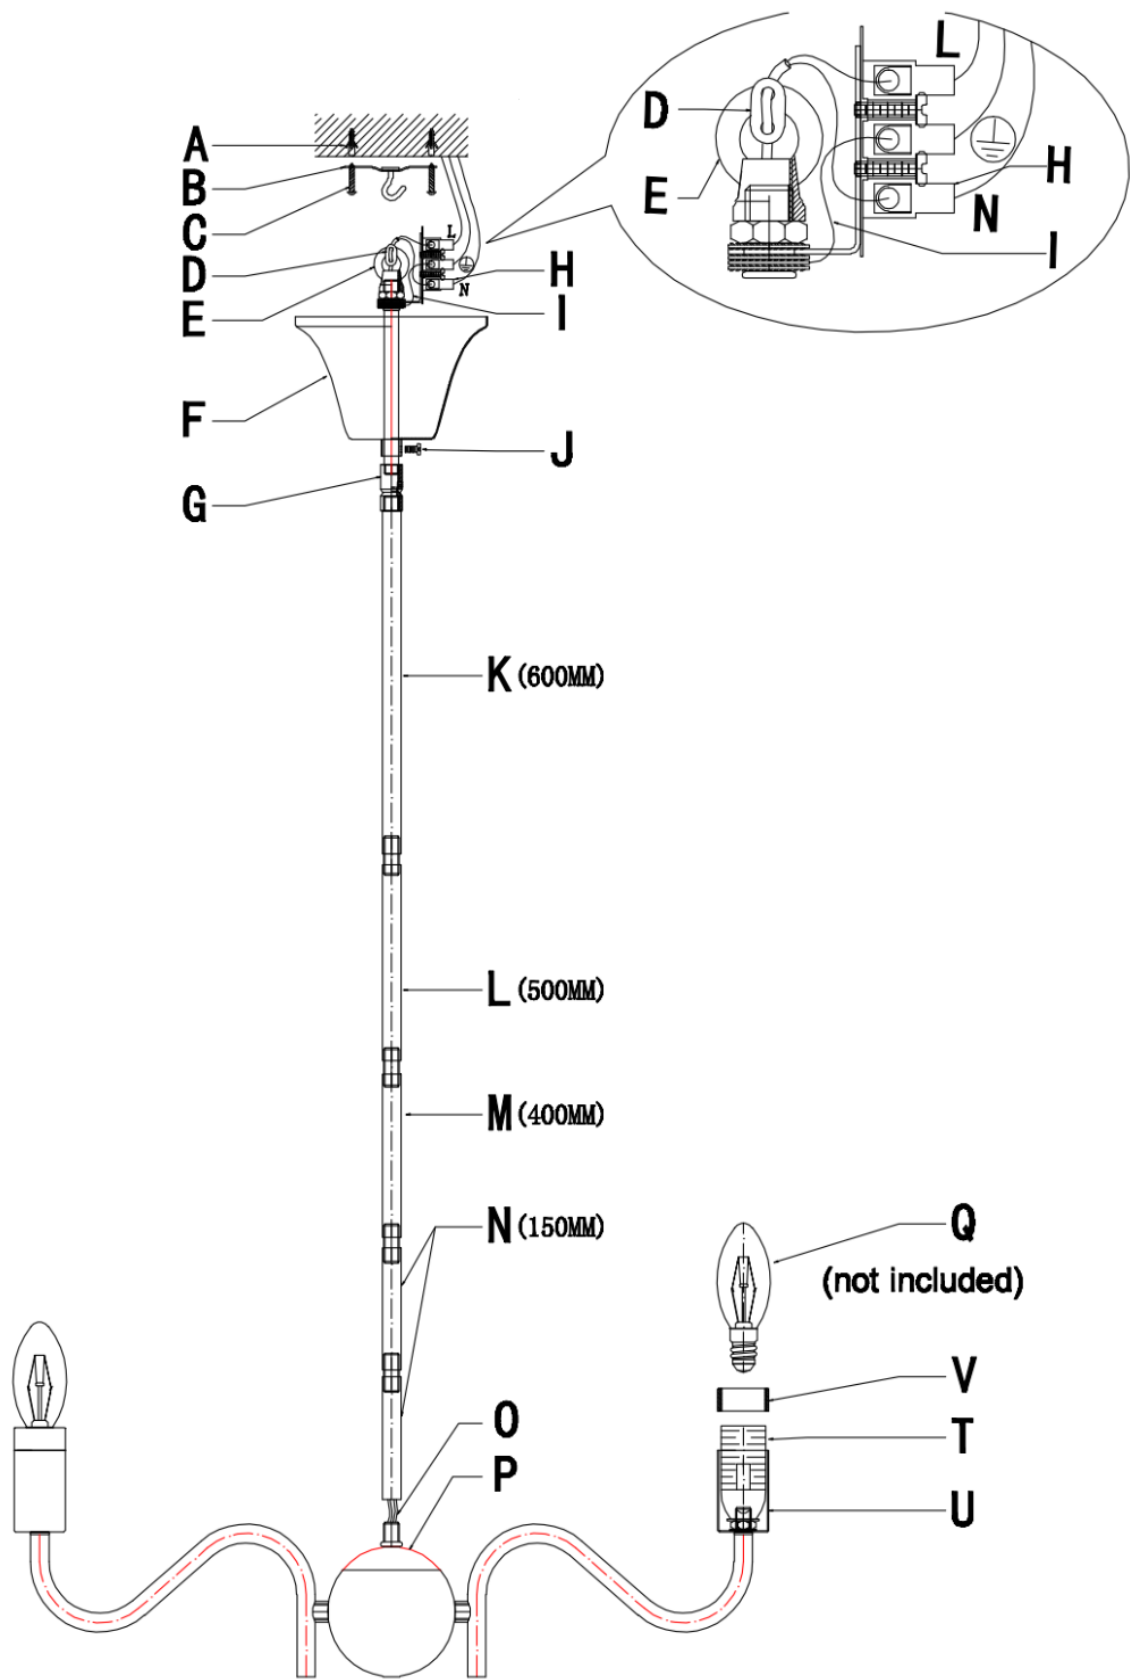

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals, etc.
- To clean/wipe with a damp clean cloth. Never soak the luminaire with water.

Specifications

SKU #	031085	031086
Colour	Aged Brass Finish with White Linen Shades	Bronze Finish with Natural Linen Shades
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	84W (3 x Max 28W)	
Lamp Holder	SES/E14	
Recommended Globes	For installations with Shades included: GE LED SES Opal Candle Globe (SKU#121483) For installations without the included shades: GE LED SES Heritage Candle Globe (SKU#121584)	
Weight	1.75KGS	
Canopy Dimensions	H:35mm Dia:120mm	
Luminaire Dimensions	Dia:680mm	H:260mm Susp:1800mm